



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number : **0 533 593 A2**

(12)

## EUROPEAN PATENT APPLICATION

(21) Application number : **92420294.8**

(51) Int. Cl.<sup>5</sup> : **H04N 1/46**

(22) Date of filing : **07.09.92**

(30) Priority : **18.09.91 US 761597**

(43) Date of publication of application :  
**24.03.93 Bulletin 93/12**

(84) Designated Contracting States :  
**DE DK FR GB NL**


(71) Applicant : **EASTMAN KODAK COMPANY**  
**343 State Street**  
**Rochester, New York 14650-2201 (US)**

(72) Inventor : **Barry, Robert Vanselow, c/o**  
**Eastman Kodak Company**  
**Patent Legal Staff, 343 State Street**  
**Rochester, New York 14650-2201 (US)**  
Inventor : **Ambro, Joseph Hayes, c/o Eastman**  
**Kodak Company**  
**Patent Legal Staff, 343 State Street**  
**Rochester, New York 14650-2201 (US)**

(74) Representative : **Buff, Michel et al**  
**Kodak-Pathé Département des Brevets et**  
**Licences CRT Centre de Recherches et de**  
**Technologie Zone Industrielle**  
**F-71102 Chalon sur Saône Cédex (FR)**

(54) A technique for generating additional colors in a halftone color image through use of overlaid primary colored halftone dots of varying size.

(57) A technique for use in a direct digital color proofing (DDCP) system (500) for printing a "modelling" color(s) in a halftone color proof image such that the modelling color simulates a ("special") color that does not lie within a gamut of colors reproducible through only primary color (e.g. cyan, magenta, yellow and black) halftone printing. Specifically, a wide range of such modelling colors can be produced by independently and appropriately setting dot size, particularly in combination with solid area density, for the halftone dots (110, 120, 130, 140) produced for different primary colors and then printing the resulting dots on an overlaid dot-on-dot basis with proper registration. Appropriate dot gain and density look-up tables (230, 720; 240, 940) are respectively used to transform continuous tone separation values and bit-mapped data to vary dot size and solid area density of these halftone dots for each such primary color prior to printing these dots using a proofing engine. A unique set of tables is used to produce each different modelling color.

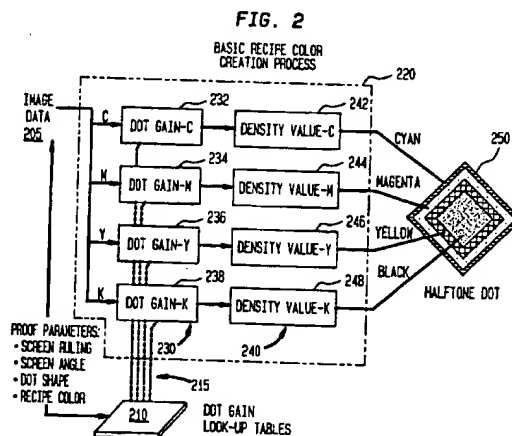

Best Available Copy

EP 0 533 593 A2

TECHNICAL FIELD OF THE INVENTION

The invention relates to direct digital color proofing systems and specifically to a technique for use in such a system for printing additional color(s) in a halftone color image by appropriately setting dot size, particularly  
 5 in conjunction with solid area density, of primary colored (e.g. cyan, magenta, yellow and black) halftone dots and then overlaying these dots with proper registration.

BACKGROUND ART

10 Graphic arts applications frequently require the accurate reproduction of a high resolution color image (commonly referred to as an "artwork"), such as a color photograph, a color drawing, a color layout and the like. A typical application might involve printing a high resolution color image or a series of such images on a page of a periodical, such as a magazine, or a corporate annual report.

In order to verify that a conventional color printing process generates a color halftone image that is an  
 15 accurate reproduction of an original color artwork, a so-called "proof" image is generally made from a series of halftone separations of the artwork. The proof image is taken to be representative of the reproduced halftone image that will be generated by a multi-color printing press. Oftentimes, the proof image contains unexpected and unsightly Moire patterns, poor tone and/or color reproduction, or other artifacts which generally can be removed through appropriate rotation of a screen angle used in generating one or more of the separations or  
 20 through appropriate color corrections. Once these adjustments are made, new separations are produced. Thereafter, the entire proofing process is iteratively repeated until a set of separations is found which will yield an acceptable depiction of the artwork.

The conventional iterative manual photographic process of producing an acceptable set of halftone separations, due to the inherent variability of the process, can be very tedious and inordinately time consuming.  
 25 Unfortunately, in the graphic arts industry, publication deadlines are often extremely tight and afford very little, if any, leeway. Consequently, the available time in a graphic arts production environment allotted to a color technician to generate a set of halftone separations to meet a particular publication deadline, for example, is often insufficient to allow the technician adequate time, due to the trial and error nature of iterative process, to generate that set of separations which produces a very high quality halftone color image. As such, the technician is often constrained by time pressures to produce a set of separations that produces a visually accept-  
 30 able, though not necessarily a very high quality, image.

In an effort aimed at reducing the time required and accompanying expense associated with the proofing process, the art has turned away from conventional manual photographic based proofing processes, particularly for use in high volume graphic arts applications, to other technologies. One of the first such technologies  
 35 was electro-photography based proofing; an illustrative system employing this technology is described in United States patent 4,708,459 (issued to C. Cowan et al on November 24, 1987 and assigned to the present assignee hereof -- hereinafter referred to as the '459 Cowan et al patent). While this system does produce an excellent quality proof, this system appears to possess various limitations which, to a certain extent, have restricted its commercial attractiveness.

40 Specifically, many printing presses today utilize five or six differently colored inks. Typically, four of these inks are the primary colors: cyan, magenta, yellow and black (C,Y,M,K), with two additional inks being so-called "special" fifth and sixth colors. For the most part, printing presses fix the density at which a single colored halftone dot is printed, i.e. either the press deposits a fixed quantity of ink at a particular location on a page or not. As such, it has become apparent in the art for quite some time that a significant number of colors, such  
 45 as for example phosphorescents (e.g. "hot pink"), pastels and golds, will fall outside the bounds of a gamut of colors that can be printed using only these four primary colors at fixed density levels. Accordingly, these colors, hereinafter referred to as "special" colors, can not be readily reproduced through the use of fixed density halftone printing using the four primary colored inks alone. As such, whenever such a special color is desired, an ink that has been specifically mixed to that color is generally used as either the fifth or sixth colored ink. Using  
 50 that ink, the special color is printed in accordance with the halftone dot patterns on a corresponding separation for that color of an original artwork. In addition, from time to time, a printing job may call for an exact color, such as illustratively so-called "KODAK" yellow, that lies within the gamut associated with the four primary colors. ("KODAK" is a registered trademark of the Eastman Kodak Company of Rochester, New York.) However, to provide higher quality color reproductions and increased reliability of the color reproduction process  
 55 than that generally obtainable through use of only fixed density primary color printing, a fifth or sixth ink that has been mixed to that specific color will be used, rather than the primary colors, to tone corresponding areas of each halftone reproduction.

In view of five and six color halftone color printing, a concomitant need has arisen for some time in the art

to be able to model both the fifth and sixth colors within a proof image. Generally speaking, this modelling could be accomplished through either of two approaches. First, one approach might be to produce a separate film within the proofing process for each special color that is to be used and then use an ink that has been matched to that color to tone corresponding halftone dot patterns therefor in the proof image. Unfortunately, this approach is likely to be quite expensive and cumbersome to implement and use. Fortunately, a reasonably close, rather than an exact, match is often adequate for use in analyzing a proof image for defects, particularly when a viewer is concerned with page layout, i.e. the areas on the proofed image in which corresponding portions of the replicated artwork are to appear, and the like. Accordingly, a second approach might be to produce a corresponding resultant color in some fashion through use of the four primary colors which, while being a reasonably close rather than an exact match to each special color, will nevertheless represent each of the special colors that is to be used.

The electro-photographic proofing system described in the '459 Cowan et al patent permits an operator to independently set the solid area density, over a reasonably wide range, of the halftone dots for each primary color. In this manner, dots of a different solid area density can be produced for each different primary color in a given proof image. Then, by accurately superimposing the primary colored halftone dots with different corresponding solid area densities in a common proof image, an extended range of colors, at least to a human observer, can be produced for use in simulating a special color(s). Unfortunately, in practice, this range, while greater than that obtainable without varying the solid area density between dots of different primary colors, nevertheless proved to be somewhat inadequate for use in modelling various special colors.

For a variety of reasons, such as for example, increased flexibility, control and throughput over that provided by electro-photographic proofing systems, the art is currently turning towards the use of so-called direct digital color proofing (DDCP) systems. These systems directly generate a halftone color proof image from a set of digitized continuous tone (contone) separations. Specifically, DDCP systems manipulate the separations in digital form to electronically generate appropriate halftone separations, including, inter alia, electronic screening and dot gain compensation, and then directly write the proof image using an appropriate marking engine (also referred to herein as a "proofing engine").

Therefore, a need presently exists in the art for a technique for inclusion in a DDCP system that can be used to model, not necessarily exactly, a wide range of special color(s) in a halftone color proof image through use of the available, illustratively four, different primary process colors (C,Y,M,K) and specifically halftone dots formed of these individual primary colors. Specifically, such a technique should significantly expand the range of special colors that can be modelled in a color proof image over that heretofore obtainable in the art, such as through electro-photographic technologies, as well as be compatible with digital marking engines.

#### DISCLOSURE OF THE INVENTION

Accordingly, an object of the present invention is to provide a technique for use in a direct digital color proofing (DDCP) system that can model a special color, such as a fifth or sixth color, by using only primary colored, e.g. cyan, magenta, yellow, black (C,Y,M,K), halftone dots.

A specific object is to provide such a technique that can significantly expand the range of special colors that can be modelled over that previously possible in the art.

Another specific object is to provide such a technique that is not only compatible with digital marking engines but is also very easy and inexpensive to implement and use, particularly in a DDCP system.

These and other objects are advantageously accomplished in accordance with the teachings of our invention by varying the dot size of the halftone dots for each different primary color and particularly by varying the solid area density of these dots as well, and then, with these variations, writing these dots on an overlaid, e.g. dot-on-dot, basis.

We have found that since a human eye spatially integrates overlaid primary colored halftone dot patterns to perceive a resultant color therefor, variations in both solid area density and dot size will yield a significantly increased range, i.e. a much wider offering, of colors than that which would result by merely varying the solid area density of each overlaid dot. Accordingly, through our invention, halftone dots of independently, though appropriately, varying size and, particularly varying solid area density as well, are overlaid with accurate registration, on a dot-on-dot basis, to generate a color (hereinafter referred to as either a "modelling" or "recipe" color) that simulates each desired special color. The amount of variation in solid area density and dot size, the latter viewed as dot gain, from one primary color to the next is determined by the particular special color that is to be modelled in a proof image and the specific recipe color that is to be generated therefor.

In accordance with a preferred embodiment of our invention, each recipe color is formed using a set of primary colored continuous tone (contone) separation data files that collectively form separation data for the corresponding special color in the image to be proofed. These data files provide the same type of primary col-

ored contone separation data as would normally be used in printing the "non-special" colors in the proof image. However, to generate halftone dot patterns for each recipe color, two separate dot size and density look-up tables are used to appropriately adjust the size and solid area density of the contone separation data for the special color separation files and, by doing so, appropriately vary the size and solid area density of the resulting primary colored halftone dots. A unique set of dot size and solid area density look-up tables exists for each special color that is to be modelled. Furthermore, this set contains separate dot size and density tables for each primary color that is to be used to generate each recipe color.

Specifically, the dot size table, which is addressed with each contone value from a contone separation data file imparts a pre-defined amount of dot gain to each of these values so as to properly vary the corresponding dot size therefor and thereby generate modified contone values. For a particular recipe color, this look-up table stores a separate pre-defined dot gain function for each primary color that is to be used to produce that recipe color. The resulting contone values produced by the dot size look-up table are then electronically screened, which includes appropriate processing through, for example, an electronic dot generator and font table to yield appropriate binary bit-mapped values that collectively define halftone dots. These binary values are then routed through a density look-up table. This latter table is accessed using each bit-mapped binary value to vary the exposure level of a laser used in the proofing engine to generate a writing spot therefor and hence vary the solid area density of each such resulting halftone dot. The dot size table preferably exists within a raster image processor (RIP) which accepts incoming contone files from any one of a variety of color electronic pre-press systems (CEPSS) and which performs data de-interleaving, screening, dot generation and other image data processing operations; while the density table is preferably situated in the proofing engine itself.

Through the use of separate dot size and density look-up tables for each primary color, the size and solid area density of each primary colored halftone dot can be independently varied in order to yield a rich offering of potential recipe colors. Furthermore, by transforming separation data using pre-stored values situated in look-up tables to yield each recipe color, the percentage contribution of each primary color in the resulting overlaid halftone dot structure and hence the resultant recipe color so formed can be readily changed by merely varying the contents of the look-up tables.

Our invention also possesses the feature, through use in a DDCP system, that any combination of primary colors can be successively printed in any desired lay-down order to yield colored halftone dots of corresponding dot size and solid area density which have been overlaid in that order. For example, if a recipe color only requires cyan and yellow dots, then only these two colors would be printed. In addition, rather than printing cyan halftone data first, yellow halftone data could be printed first with cyan being printed second, and so on for other color orders. By permitting any combination of the available primary colors to be used in any desired lay-down order, an increasingly broad offering of recipe colors can be readily and easily produced through use of our invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention may be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts the structure of composite halftone dot 100 formed in accordance with our inventive teachings for a given recipe color;

FIG. 2 depicts a simplified high level block diagram of our inventive method for forming recipe colors using overlaid halftone dots of varying dot size and solid area density;

FIG. 3 depicts a graph of ideal and typical versions of dot gain curves as known in the art;

FIG. 4 depicts graphs of dot gain functions for specifying the dot size of various primary color halftone dots that are to be overlaid in accordance with our inventive teachings to form a particular recipe color;

FIG. 5 depicts the correct alignment of the drawing sheets for FIGs. 5A and 5B;

FIGs. 5A and 5B collectively depict a high level block diagram of Direct Digital Color Proofing (DDCP) system 500 that utilizes our invention to generate recipe colors on a digital proof image;

FIG. 6A depicts the data structure of a proof request used in DDCP system 500 shown in FIGs. 5A and 5B;

FIG. 6B depicts the structure of image file description field 610 situated within proof request (queue element) 600 shown in FIG. 6;

FIG. 6C depicts image processing flags field 619 that forms part of image file description field 610 shown in FIG. 6A;

FIG. 6D depicts the structure of each one of pass parameters fields 680 situated within proof request 600 shown in FIG. 6A;

a corresponding proof image. While these values are typically fixed for each primary color, appropriate empirically determined functions can be used instead with their values being stored into a table, similar to table 210, and subsequently loaded into tables 240, as needed.

As will be seen below, dot gain tables 230 exist within a raster image processor (RIP) in the DDCP system wherein the RIP accepts incoming contone files from any one of a variety of color electronic pre-press systems (CEPSs) and which performs data de-interleaving, screening, dot generation and other image data processing operations; while density tables 240 are situated in the proofing engine itself used in the DDCP system.

To understand dot gain and the contents of dot gain tables 230 which are used to form a given recipe color, consider FIGs. 3 and 4.

FIG. 3 depicts a graph of ideal and typical versions of dot gain curves for a single color as known in the art. Dot gain is a well known phenomena in halftone printing and refers to an apparent change in size of a printed halftone dot from its input size. This change typically results from the tendency of ink to spread after it has been deposited on paper as well as to various optical effects that make a dot appear larger than it actually is. Dot gain is typically measured in terms of dot area and can cause an increase (or decrease) in dot area for a given input dot area. Dot area is measured in terms of 0% to 100% with 100% indicating a desired maximum sized dot. For no dot gain as symbolized by dashed line 310, an input dot will produce, on a 1:1 basis, the same size output dot. However, due to dot gain, a relationship between dot input size and actual output dot size may not be linear and, in fact, often varies based on the input dot size as indicated by illustrative curve 320. Dot gain, being area 350, is viewed as the percentage change in area for an output dot relative to a given size input dot. For curves 310 and 320, the dot gain is given by region 350. Inasmuch as dot gain is typically specified for a given percentage input dot size, dot gain for a 20% input dot is shown by line 330 and for a 40% input dot by line 340.

Now, to generate a recipe color, the dot in/dot out relationship is intentionally changed to vary the dot size of the dots produced for each primary colored component halftone dot. As such, FIG. 4 depicts graphs of dot gain functions for varying the dot size of various primary color halftone dots that are to be overlaid to form a particular recipe color.

The particular recipe color utilizes overlaid cyan, yellow and magenta halftone dots with their dot gain functions being given by lines 420, 430 and 440. For purposes of ready comparison, an ideal 1:1 dot gain function is shown by dashed line 410. For each input dot size, i.e. each different contone value in each of these primary color separations for the corresponding special color, these dot gain curves specify the output dot size to use for each such primary color so that the resulting primary colored component halftone dots, once superimposed and printed on an accurate dot-on-dot basis with the appropriate solid area density levels, will produce the desired recipe color. For example, for equal sized 40% input dots for cyan, yellow and magenta ( $DI_C$ ,  $DI_Y$ ,  $DI_M$ ), the recipe color would be formed of approximately a 50% cyan output dot ( $DO_C$ ), a 65% yellow output dot ( $DO_Y$ ) and a 28% magenta output dot ( $DO_M$ ), and so on for other input dot size values regardless of whether these input values are equal or unequal for the individual primary colors. In defining each recipe color to the DDCP system, the digitized values of the full corresponding dot gain curve for each different primary color used to form that recipe color are provided to the system and then stored therein for subsequent use in loading each corresponding dot gain look-up table, when needed. Though dot gain functions normally start at 0% and terminate at 100%, there is no such requirement in generating dot gain functions for component halftone dots to be used in depicting a recipe color. These dot gain curves, as well as the accompanying solid area density correction values discussed above, are empirically determined using procedures well known in the art to yield an appropriate recipe color for each special color that is to be simulated in a color proof image.

With the above in mind, the remainder of the discussion will now address the specific manner through which our invention is implemented within an illustrative DDCP system. In this regard, FIGs. 5A and 5B collectively depict a block diagram of DDCP system 500 which utilizes our invention for printing recipe colors. The correct alignment of the drawing sheets for these figures is shown in FIG. 5. For the purposes of brevity, only those aspects of this DDCP system that are germane to a full understanding of the implementation and/or use of our invention will be specifically discussed hereinbelow.

As shown, DDCP system 500 is connected to and obtains contone image data, via lines 505 (containing lines 505<sub>1</sub>, 505<sub>2</sub>, ..., 505<sub>n</sub>), for an original image from any one of a number of color electronic pre-press systems (CEPSs) 503<sub>1</sub>, 503<sub>2</sub>, ..., 503<sub>n</sub> that collectively form CEPSs 503. In essence, DDCP system 500 processes the contone image data for each image and generates an accompanying color proof image therefor on, for example, a paper medium. The resulting proof image after being transferred to the paper medium is referred to as a "proof sheet". Contone image data can also be previously recorded on magnetic tape and, through magnetic tape drive 507, provided to DDCP system 500 for proofing.

The data provided by each CEPS is in the form of a file of successive contone values which, for each successive pixel within an image, are formed of interleaved contone values for the individual separation colors,

dot 100 is printed with a lay-down order of cyan dot 110 first, followed by magenta dot 120, then yellow dot 130 and finally black dot 140. While composite dot 100 and its component halftone dots are all illustratively diamond shaped, a wide variety of other dot fonts, such as for example round or oval shaped dots, can be used instead. Moreover, while composite dot 100 is shown as being composed of four primary colored component halftone dots, a different number of such component dots could also be used and in any desired order. Inasmuch as a DDCP system, such as system 500 shown in FIGs. 5A-5B and described below, also permits a colored media to be used, the color of the media itself can be used as an additional color component in forming a composite dot, though its solid area density and size would be fixed.

To achieve different recipe colors, the dot size as well as the solid area density of each component dot can be independently varied on a continuous basis, as desired, from 0-100%. These variations permit the contribution of each primary color to be adjusted proportionally over its entire tone reproduction range in order to achieve tints of the same color hue.

A simplified high level block diagram of our inventive method for forming recipe colors using overlaid halftone dots of varying dot size and solid area density is depicted in FIG. 2. Each recipe color is formed using a set of primary colored (C,Y,M,K) contone separation data files for that particular recipe color. For each primary color that is to be used in generating a recipe color, each successive value in the separation file for that primary color is effectively transformed through two successive look-up tables, specific to that primary color, to impart the needed variation in halftone dot size and solid area density to the resulting component halftone dots for that primary color. These look-up tables contain empirically determined data which, based upon the incoming contone separation values and desired recipe color, provide appropriate settings for dot gain and solid area density for each primary colored component halftone dot.

Specifically, incoming image data 205 for a given set of C,Y,M,K separation files for a special color is routed into processing and printing block 220 which, in turn, generates halftone bit-mapped data that when printed, on a dot-on-dot basis, forms illustrative composite halftone dot 250. Inasmuch as block 220 provides a number of image processing functions, such as inter alia translation of interleaved CEPS (color electronic pre-press systems) data files, de-interleaving of the CEPS data files into constituent C,Y,M,K separation files and electronic screening, and digital color image printing, that do not form part of our specific invention, all these functions have been omitted to simplify the drawing and facilitate reader understanding of our invention.

As shown, processing block 220 contains four dot gain look-up tables 230 (collectively formed of cyan dot gain table 232, magenta dot gain table 234, yellow dot gain table 236 and black dot gain table 238) and four solid area density look-up tables 240 (collectively formed of cyan density table 242, magenta density table 244, yellow density table 246 and black density table 248). Contone C,Y,M,K separation values are supplied to the input of the corresponding cyan, magenta, yellow and black dot gain tables. Each of these tables is loaded with a pre-defined dot gain function which imparts an appropriate variation, in terms of dot gain, to the dot size for the corresponding primary color. For example, if a cyan component halftone dot for a given recipe color required a dot gain of 10% for a 50% input dot, then, for this sized dot, table 232 would produce a contone value corresponding to a dot size of 60%, and so forth for other variations in dot size. The modified outputs of C,Y,M,K dot gain tables 232, 234, 236 and 238, after among other operations being electronically screened and thus converted into appropriate halftone dot patterns, are fed to respective C,Y,M,K density tables 242, 244, 246 and 248. Specifically, the value of each binary bit that is to form a halftone dot for a given primary color is applied as input to a corresponding density table. Based upon its value, the corresponding table generates either one of two pre-defined multi-bit values to set the exposure level of a laser used in the proofing engine so as to produce the corresponding writing spot with a proper level of darkness and hence vary the solid area density of each component halftone dot partially formed by these spots, such as the component dots which collectively form dot 250. The density can vary in a relative range of .2D to 2.0D. Changing density alone permits recipe colors of different hues to be produced.

To properly configure a DDCP system to generate a desired color proof image, the system, as discussed in detail below, relies on use of a proof request that contains various parameters that specify, among other items, screen ruling, screen angle, dot shape and recipe color(s) to be used to generate that image. Inasmuch as the system typically stores empirically based dot gain functions for a relatively large number of special colors, in symbolically tables 210, the system will load, as symbolized by dashed lines 215, tables 230 from table 210 with values for the dot gain functions needed for a corresponding recipe color, i.e. of the primary colors required therefor, immediately prior to processing contone values for an incoming proof request that employs that recipe color. As discussed below, the DDCP system provides an operator with the ability to add, change (such as by using different empirical data values) and delete any recipe color from the system which, in turn, will appropriately change the contents of table 210. In addition, the DDCP system stores as part of the specification for each recipe color, the solid area density correction value for each constituent primary color. The DDCP system also loads the appropriate primary color density correction values into tables 240 immediately prior to printing

FIG. 7 depicts a simplified high level block diagram of a process through which contone separation data is processed within processor 530 shown in FIGs. 5A and 5B to yield halftone image data for proofing engine 570 and specifically including the processing occurring within processor 530 for use in generating a recipe color in accordance with our invention;

FIG. 8 depicts a block diagram of those components of proofing engine 570 that are germane to our present invention;

FIG. 9 depicts a block diagram of illustrative density circuit 820, situated within proofing engine 570 shown in FIG. 8 and which specifically includes solid area halftone density conversion look-up table 940 for use in generating a recipe color in accordance with our inventive teachings;

FIG. 10 depicts recipe colors selection screen display 1000, that is generated at operator PC 520 situated within DDCP system 500 shown in FIGs. 5A and 5B, for use by an operator in listing those recipe colors for which definitional data is stored on raster image processor 510, creating a file of data for a new recipe color or selecting such a file for an existing recipe color that is to be modified; and

FIG. 11 depicts recipe color setup screen display 1100, that is generated at operator PC 520 shown in FIGs. 5A and 5B, for use by the operator in entering data for a new recipe color or editing a file for an existing and selected recipe color.

To facilitate understanding, identical reference numerals have been used, where possible, to denote identical elements that are common to various figures.

## MODES OF CARRYING OUT THE INVENTION

After reading the following description, those skilled in the art will readily appreciate that the teachings of our invention can be applied to any of a wide variety of different types of color digital images, such as illustratively proof images or digital prints, as well as to either halftone or continuous tone (contone) imaging, to create a recipe color from a limited number of colorants used in printing any such image. Primarily speaking, our invention is directed to halftone imaging wherein a significantly expanded range of colors can be provided by dot-on-dot halftone printing of primary colored dots of appropriate size and density. However, our inventive teachings can also be used in contone printing to create recipe colors by overlaying primary contone colors of appropriately varied density values though without any size variation. Moreover, the teachings of our invention can be used not only with a cyan, yellow, magenta and black (C,Y,M,K) color gamut used in halftone printing but with many other color gamuts as well. For ease of explanation, our invention will now be described in the context of use within a direct digital color proofing system (DDCP) for creating a recipe color in a digital color proof image using the C,Y,M,K color gamut.

In accordance with our broad inventive teachings, we have found that a wide range of colors can be obtained in a color proof image by varying the dot size of the halftone dots for each different primary color and particularly, to further expand the range, by varying the solid area density of each of these dots as well and then, with these variations, accurately printing these dots on an overlaid dot-on-dot basis. By doing so, a large range of so-called "recipe" colors can be achieved in the proof to simulate "special" colors that can be printed using multi-color, e.g. five or six, color printing presses, but which are not situated within the C,Y,M,K color gamut. In particular, we have found that since a human eye spatially integrates overlaid primary colored halftone dot patterns to perceive a resultant color therefor, variations in both solid area density and dot size will yield a significantly increased range of recipe colors than that which can be produced by merely varying the solid area density of each overlaid dot.

Accordingly, through our invention, halftone dots of independently, though appropriately, varying dot size, particularly in conjunction with solid area density variations, are overlaid with accurate registration, on a dot-on-dot basis, to generate each recipe color. The amount of variation in solid area density and dot size, the latter viewed as dot gain, from one primary color to the next is determined by the specific recipe color that is to be generated in the proof image and that is to model (i.e. simulate) a corresponding special color in an original image being proofed. While the recipe color, based on C,Y,M,K colorants, will not exactly match a special color situated beyond the C,Y,M,K gamut, the resulting recipe color will nevertheless simulate the special color.

FIG. 1 depicts the structure of a composite halftone dot formed in accordance with our inventive teachings for a given recipe color. As shown, composite halftone dot 100, having a dot size of 100%, is formed by overlaid dot-on-dot printing, using separate toning passes, of primary colored component halftone dots 110, 120, 130 and 140 which have different corresponding dot sizes and density levels. Dot 100 is shown grossly exaggerated in size for purposes of illustration. As an example, component dots 110, 120, 130 and 140 are respectively a cyan dot with approximately a 100% dot size and a 95% solid area density; a magenta dot with approximately an 80% dot size and a 90% solid area density; a yellow dot with approximately a 50% dot size and an 80% solid area density; and a black dot with approximately a 25% dot size and a 40% solid area density. Composite

e.g. values for cyan, yellow, magenta, and black (C,Y,M and K), therefor. A similarly interleaved separation file is provided for each special color that is to appear in the image. Each of CEPSs 503 can be any one of a number of current commercially available color electronic pre-press systems.

In general, for any image to be proofed, DDCP system 500 digitally manipulates the contone separation values provided by any of the CEPSs by first de-interleaving these values into individual contone separation files, then digitally generates a halftone separation file for each of the individual contone separations by, for example, inter alia, electronic screening and dot gain compensation, and then directly writes a composite color proof image for all these halftone separations using the proofing engine. This processing is the same for all the separation files, regardless of whether the particular file is for a special color or not. However, if the interleaved file is for a special color, then this processing also includes dot gain and solid area density transformation in accordance with the teachings of our present invention. A proof request, as discussed below, specifies the name of the particular recipe color that is to be used to simulate a corresponding special color.

DDCP system 500 contains raster image processor (RIP) 510; proofing engine (PE) 570; operator personal computer (PC) 520 and its associated peripherals: densitometer 524, remote diagnostic modem 525 and line printer 526; and laminator 580. Each of CEPSs 503<sub>1</sub>, 503<sub>2</sub>, ..., 503<sub>n</sub> is connected within RIP 510 through an appropriate hardware interface 512<sub>1</sub>, 512<sub>2</sub>, ..., 512<sub>n</sub>, which collectively form interfaces 512, to CEPS bus 515 which, in turn, is connected to processor 530. This processor is a conventional microcomputer system. Hard disks 541 and 543 (also denoted as hard disks 1 and 2) are also connected to processor 530 and provide temporary storage of processed halftone image data generated by this processor. Each of these hard disks contains an image file, with both of these disks collectively operating on a "ping-pong" basis such that processor 530 writes halftone image data for the next image to be proofed into one of these disks, while it reads halftone image data for the current image being proofed from the other disk and applies that data to the proofing engine. The processor alternates the function of each of these disks between reading and writing as data for successive images to be proofed is applied to the DDCP system.

RIP 510 is connected to proofing engine 570 through serial message link 560 which carries status and error messages, commands and parameters between these units on a serial basis. Data interface 550, which is formed of sixteen-bit parallel (active high) image data bus 553 and image control bus 555, is used to transfer halftone image data in sixteen-bit parallel form (for transferring halftone data for sixteen successive pixels at a time) from the RIP to the proofing engine. The RIP pads, as necessary, each micro-raster of the image to a sixteen-bit word boundary and, prior to the transfer of data across data bus 553, notifies the proofing engine, via serial link 560, as to the number of halftone bytes existing on each line of the proof image. This number is a constant for each image. Image control bus 555 contains three separate lines (not specifically shown): data ready, data request and data acknowledge, which are collectively used by RIP 510 and proofing engine 570 to implement a simple interlocked handshake protocol to transfer each successive sixteen-bit data word between these components. In particular, to transfer a sixteen-bit data word, RIP 510 asserts a signal (active low) on the data ready line (the "data ready signal") to inform the proofing engine that data transfer is to begin. Thereafter, to obtain this data word, the proofing engine asserts a signal (active low) on the data request line (the "data request signal"). Once this assertion is detected by the RIP, the RIP places the sixteen-bit data word onto image data bus 553 and then asserts a signal (also active low) on the data acknowledge line (the "data acknowledge signal"). Once the proofing engine reads this data word, then, in response to the asserted data acknowledge signal, the engine de-asserts the data request signal. In response to this, the RIP de-asserts the data acknowledge signal thereby completing an interlocked handshake operation and the accompanying successful data transfer. On the rising edge of the data acknowledge signal, proofing engine 570 loads the incoming sixteen-bit data value into an internal holding first-in first-out (FIFO) circuit within a data interface module (see FIG. 8). These steps are then repeated in seriatim for each successive sixteen-bit data word that is to be transferred from RIP 510, shown in FIGs. 5A and 5B, to the proofing engine for the current proof image to be printed. After all the halftone data has been transferred for a given proof image, the RIP will de-assert the data ready line. For each proof that is to be printed, the RIP successively transfers to the proofing engine the complete bit-mapped halftone image data, as a succession of sixteen-bit words, for each separate halftone separation image that is to form the proof.

Operator PC 520, containing display and keyboard 521 and processor 522, is a conventional personal computer that is interfaced through serial links 533 and 537 to both RIP 510, specifically processor 530 therein, and proofing engine 570. This PC permits a DDCP operator to monitor and interrogate the status of as well as control both RIP 510 and proofing engine 570 and perform diagnostic and set-up operations thereon, as desired. Densitometer 524, under control of operator PC 520, is used to measure the density of various test patches generated by the proofing engine in order to calibrate its performance. Modem 525 provides a dial-up telephone link for use in remotely diagnosing any abnormalities that may occur within the DDCP system. Line printer 526 can be used by the DDCP operator to provide a local printout of desired information.



Proofing engine 570 is preferably a multi-laser sublimation dye transfer binary marking engine. In essence, to print a proof image by the marking engine, a receiver sheet (i.e. a film media with a transfer layer) of appropriate dimensions is automatically cut and wrapped onto a rotating drum (not shown) within the engine. Thereafter, to generate a particular C,Y,M or K separation, a respective C,Y,M or K dye donor sheet is first  
 5 spooled off a supply reel within the engine and superimposed, in proper registration, onto the receiver sheet with an emulsion side of the donor sheet contacting the receiver sheet. Thereafter, a bit-mapped image for an appropriate halftone separation is written by the proofing engine onto the donor sheet by selectively exposing that sheet, using a writing laser, at each location where a darkened writing spot is to appear. At each such location, the exposure causes a controlled amount of dye to migrate (transfer) from the donor sheet to the top  
 10 of the transfer layer of the receiver sheet. For each darkened writing spot, the intensity of the light produced by the writing laser determines the amount of dye that transfers to the receiver sheet. Once this occurs, the donor sheet is removed from the receiver sheet. This process is then repeated using a differently colored donor sheet for each remaining separation. This entire toning process is then successively repeated for the bit-mapped images that form the separations for each special color and specifically to form primary colored component  
 15 halftone dots that, after having been accurately overlaid on a dot-on-dot basis, will paint all the regions in the proof image with the corresponding recipe color. In addition, the proofing engine can accommodate differently colored receiver sheets. Furthermore, the marking engine can also accommodate two specially colored donor sheets and write accompanying separations thereon for transfer to a receiver sheet. These colored donor sheets and accompanying separations can be used to generate an exact shade of either of two special colors, such as "KODAK" yellow, or of special colors that are not within the color gamut defined by cyan, yellow, magenta and black, e.g. "Hot" pink, phosphorescent, pastels or gold colors. (KODAK is a registered trademark of the Eastman Kodak Company of Rochester, New York which is also the present assignee hereof.) For purposes of simplifying the ensuing discussion, we will assume that the proofing engine is writing only primary colored separation data. Once proofing engine 570 writes all the primary colored separations for a particular proof image, including those for the "non-special" and "recipe" colors, onto a receiver sheet, the engine ejects that  
 20 sheet as intermediate sheet 575. At this point, the entire proof image is situated on the top of the transfer layer of the receiver sheet that forms the intermediate sheet. In order to transfer the proof image from the intermediate sheet to paper media, in order to form a so-called "proof sheet", the DDCP operator manually inserts intermediate sheet 575 along with a sheet of pre laminate material and a sheet of press stock into laminator 580. The laminator is not electrically connected to any of the components within DDCP system 500. Once the operator feeds these sheets into the laminator, it first prelaminates the press stock to the intermediate sheet and then laminates the transfer layer to the press stock. Once lamination is completed, a laminated page emerges from the laminator with the transfer layer containing the proof image fused to the press stock. The operator then peels off and discards intermediate layer 585, which is a backing layer, and then retains proof  
 25 sheet 590 containing the proof image. For purposes of the present invention, any one of a number of different types of proofing engines could be used. Inasmuch as the laminator does not form part of the present invention, it will not be discussed in any further detail below.

In order to generate a proof image, an operator situated at any of CEPSs 503 formulates a proof request through a keyboard and interactive menu based screen displays provided thereat. The proof request, as defined below and shown in FIGs. 6A-6D, contains those parameter values and file name(s) that are necessary,  
 40 when proofing resources are available, to set-up the DDCP system to generate a proof image. The parameter values define the manner through which the contone image data for the proof image is to be processed by the RIP, such as by defining screen rulings and angles, separation sequence, number of copies, recipe color(s) to use, and the like, and then printed by the proofing engine. The file name(s), which are defined by the CEPS operator, specify the names of the data file(s) that reside on the CEPS and contain the interleaved contone image data for that proof image. Note however, that the proof request does not however contain the image data itself but only an identification of the file(s) which stores that data. By eliminating image data from each proof request, the size of each proof request is substantially reduced from upwards of approximately 100 MBytes (for image containing both contone data and linework) to approximately 200 bytes.

After a proof request has been entered, the particular CEPS on which it is entered will transmit that request to DDCP system 500 and specifically to RIP 510. Proof requests can be entered either while the DDCP system is currently processing a prior proof request, printing a proof image or performing neither operation. RIP 510 maintains a proof request queue within one of the two hard disks, illustratively within hard disk 541. This queue contains three separate queues: a "rush" queue, a "normal" queue and a "hold" queue. Based upon the priority  
 55 accorded to the request by the operator, i.e. rush, normal or hold, RIP 510 places the incoming request at the bottom of the appropriate queue. Those requests that have been assigned a rush priority are sequentially processed first, again on a first-in first-out basis, by the RIP and, in turn, forwarded to the proofing engine for printing ahead of any "normal" priority requests. A request with a "hold" priority is merely retained in the "hold" priority

queue but is not processed until such time as its priority is changed or it is incorporated, by an operator, into a "scatter" proof request. A scatter proof is a proof that contains a number of non-overlapping images, here arising from separate proof requests, that are printed on a common proof sheet.

Through operator PC 520 and specifically through various interactive menu based screen displays generated thereat, the DDCP operator can edit the contents of each of the queues and each proof request therein. Because the image parameters that configure the proofing engine for any proof image form part of the request for that proof, the operator can change, as desired, the condition(s) under which any individual proof will be generated, e.g. by changing screen ruling, screen angle for any individual halftone separation and the particular recipe color(s), if any, that are to be used. In addition, the DDCP operator can also re-prioritize the proof requests, re-arrange the order in which the proof images are successively generated, and even add or delete proof requests from each queue. Furthermore, as discussed in conjunction with FIGs. 10 and 11 below, the DDCP operator can also list those recipe colors for which definitional (i.e. set-up) data is stored on raster image processor 510, create a file of data for a new recipe color or select such a file for an existing recipe color that is to be modified and subsequently modify the recipe color definition stored in that file.

The RIP begins processing a particular proof request once that request reaches the top of its associated queue. To simplify matters for purposes of the ensuing discussion, the proof request queue will be assumed, on a simplistic basis, as containing only one queue. Specifically, after the most recently occurring request has been fully processed, the RIP reads the next proof request situated at the top of the queue. Once this request has been read, the RIP determines, based upon the parameter values specified in that request and current system resources, whether a proof image for that request can be currently printed or not. In this regard, for example, if the request specifies a particular media color, the RIP determines through querying proofing engine 570 whether media for that color has been loaded into the engine and whether sufficient supplies of that media exist to generate the proof. Similarly, if a special color donor sheet is specified, the RIP inquires as to whether that donor sheet is available, and so forth for other consumable items.

If the RIP determines that appropriate system resources exist to generate a proof image for this request, then the RIP obtains the appropriate contone data file(s) from the CEPS that generated this request. The appropriate file name(s) and an identification (device number) of this CEPS are specified within the proof request. For example, for a proof request generated from CEPS 503<sub>2</sub>, RIP 510, as shown in FIGs. 5A and 5B, sends an instruction containing the file name(s) specified in that request for the accompanying contone data to this CEPS. In response, the CEPS reads the file(s) and supplies the data over line 505<sub>2</sub> to RIP 510. This data will be routed through the appropriate interface circuitry, such as circuitry 512<sub>2</sub>, which provides an appropriate hardware interface for this CEPS to the RIP. The data is then routed, via CEPS bus 515, to processor 530 situated within RIP 510. The processor will first translate this data, if necessary through an appropriate translation routine, into a form compatible with RIP programming. This may include, for example, inverting density values where on a particular CEPS a "0" eight-bit contone value may indicate full density, while on the DDCP the same value would indicate no density. To provide compatibility across many different CEPSSs, separate hardware interfaces and software translation routines, to the extent needed, will exist within the RIP for each different CEPS. As such, the DDCP can function with a wide variety of different CEPSSs, and nearly any number of different CEPSSs can be interfaced to CEPS bus 515. After the contone data has been appropriately translated, RIP 510 will electronically screen the data for each separation to generate a halftone separation for each different primary color. To generate each recipe color, this processing also includes transforming the contone separation values through the appropriate dot gain look-up table, as discussed above, in order to obtain the proper dot size for each component halftone dot that will be printed on a dot-on-dot basis to generate that recipe color. Thereafter, the RIP stores all the data for the halftone separations for the current image being processed, including that for the separations for each of the desired recipe color(s), in either hard disk 541 or 543. At the same time, the RIP is reading halftone image data for the image that has most recently been processed and is applying that data over data interface 550 to proofing engine 570 to generate a proof image therefor. To increase throughput, the RIP pipelines the image processing and printing functions. Specifically, while processed halftone image data is being read from one hard disk and printed, newly processed image data for the next image to be printed is being stored on the other hard disk. Under the control of RIP 510, each of the hard disks reverses its function with each successive image. Operating the hard disks in this fashion increases the throughput of proof images through the DDCP and allows the system to produce a relatively steady stream of images through the system at or near that of the proofing engine. Therefore, assuming that the RIP is currently reading halftone image data from hard disk 543 for printing, newly processed image data for the current image being processed will be stored on hard disk 541. Once all the data has been supplied from hard disk 543 to proofing engine 570 in order to print the most recently processed image, then, shortly thereafter, RIP 510 will read the halftone image data stored on hard disk 541 and supply it to the proofing engine for printing, with this process being repeated for successive images to be proofed. Inasmuch as the particular image proc-

essing, apart from dot gain transformation that occurs to the contone image data by RIP 510 does not form part of the present invention, this processing will not be discussed in any further detail below. For a detailed explanation of the queue based manner in which proof requests are processed through RIP 510, including the use of hard disks operating on a "ping-pong" basis, the reader is referred to the co-pending United States patent application entitled "A Queue Based Technique for Handling Proof Requests in a Direct Digital Color Proofing System" from applicants S. Auer et al, serial number 07/749,024; filed August 23, 1991 and which has been assigned to the present assignee hereof and which is incorporated by reference herein.

The proof requests that reach the top of either of the "rush" or "normal" priority queue but can not be processed by the RIP at the time they were read retain their place in their respective queue pending subsequent processing. Proof requests can also be entered by the DDCP operator through operator PC 520 and specifically using menu driven interactive screen displays and keyboard entry through display and keyboard 521.

FIG. 6A depicts the data structure of a typical proof request. This request is stored within the proof request queue as proof request (queue element) 600. Request 600 contains a succession of fields, with their accompanying reference numbers, listed and described below in Table 1.

Table 1 -- Proof Request Fields

<u>Item</u>	<u>Description</u>
Pointer to next entry (605)	Pointer to next entry (proof request queue element -- PRQE) in a linked list, that forms a queue, (rush, normal or hold) which holds this proof request;
Input file description (610)	Data structure which specifies: characteristics of the particular contone data to use in generating a proof image; file, device and page names for this data; and various image processing flags to enable/disable corresponding imaging features;
Output color order (625)	String defining the order of cyan, magenta, yellow, black, one media "special" color and/or two additional "special" separation colors for use in up to five successive halftoning passes for a common proof image;

5	Screen ruling (630)	Floating point value between 65-200 lines/inch continuous (approximately 25.59 - 78.74 lines/cm) which specifies the screen ruling to use for all the separations;
10		
15	Dot font (635)	Byte specifying dot font, e.g. diamond, elliptical, square, round, gravure or composed;
20	Description (640)	Optional text for a data legend to be printed on the side of the proof image; (string);
25	Number of proof copies (645)	Integer value from 1-50 designating number of copies of a proof image to print (byte);
30	Upper left hand corner x coordinate position (650)	Integer value (in mm) defining the x position of the upper left hand corner of an image to be proofed relative to the media sheet -- only required for use in a scatter proof request;
35		
40	Upper left hand corner y coordinate position (655)	Integer value (in mm) defining the y position of the upper left hand corner of an image to be proofed relative to the media sheet -- only required for use in a scatter proof request;
45		
50		
55		

5	Scatter proof enable (660)	Boolean value specifying whether this proof request can be part of a scatter proof request. If this enable is not set, then the associated request will not be included in a scatter proof request regardless of whether the associated request has been given a "hold" priority;
10		
15	Priority (665)	Byte specifying rush, normal or hold;
20	Extra Separation Names (670)	Strings (up to two) which specify the file names of up to two extra (additional) separations that are to be generated for the proof image;
25		
30	Recipe Color Number (675)	Strings (up to two) which specify the number of up to two recipe colors to be used in printing a proof image; and
35	Pass parameters (680)	Data structure specifying parameter values particular to each halftone printing (writing) pass that is to be undertaken by the proofing engine.
40		

45 As indicated in FIG. 6B, image file description field 610 is itself a data structure that, among other things, contains a succession of names and parameter values pertinent to the particular contone data to use in generating a proof image for this request. Specifically, the constituent fields in field 610 are listed, with their accompanying reference numbers, and described below in Table 2.

50

55

Table 2 -- Image File Description Fields

<u>Item</u>	<u>Description</u>
CEPS Device Name (611)	String that specifies the name of the CEPS (or other device) on which the contone data file(s) reside;
Job Name (612)	String that defines a job name for the current proof request. Fields 611 and 612 are automatically established for this proof request once the CEPS (or DDCP) operator establishes a pathname at the CEPS (or the operator PC) for the contone file(s);
Page Name (613)	String which identifies the name of the particular page in the artwork to be proofed through this request;
Image Name (614)	String which identifies the name of the particular image in an artwork to be proofed through this request;
CT resolution (615)	Integer value that specifies the resolution of the contone image file(s) to be proofed through this

request;

5	<b>LW resolution (616)</b>	Integer value that specifies the resolution of the accompanying linework file(s) to be proofed through this request;
10		
	<b>Image Height (617)</b>	Integer value (in mm) that specifies image height;
15		
	<b>Image Width (618)</b>	Integer value (in mm) that specifies image width; and
20		
	<b>Image Feature Flags (619)</b>	Byte containing various boolean flags to control various image processing and printing functions.
25		

Image feature flags 619, as specifically shown in FIG. 6C, contain separate boolean fields for the functions of, inter alia: image scaling, rotation, mirror orientation, control strip enable and data legend enable. Specifically, the scaling ("Scale to Fit") flag, if set, permits the RIP to scale the size of the image, if needed, to fit the dimensions of a proof image area that has been defined on the media on which the proof will be generated. Similarly, the rotation ("Rotate Image") flag, if set, permits the RIP to rotate the image by 90°, if needed, to fit the proof image area. The mirror ("Mirror Image") flag instructs the proofing engine, through the RIP, to change the orientation of the image, in a fast scan direction, based on whether the contone data was stored in a so-called "mirrored" format by a CEPS which generated this request. The control strip enable flag, if set, instructs the RIP to print a control strip on the edge of the proofed image as it is being printed. The control strip consists of a series of single color test patches for use in subsequent densitometric measurements of the proofing process. Lastly, the data legend enable flag, if set, instructs the RIP to print a data legend, as specified in description field 640 shown in FIG. 6A, on the edge of the proofed image as it is being printed.

As indicated in FIG. 6D, pass parameters field 680 is itself a data structure that is replicated up to five times and contains parameter values pertinent for each successive halftoning pass that is to be performed by the proofing engine to generate a proof image for the associated request. Inasmuch as four separate passes can occur for the four different primary colored donor sheet colors and a separate pass can occur for a special colored media sheet, five separate halftoning passes to generate the "non-special" colors can be specified in a proof request. Similarly, this toning process can be repeated to separately tone each of the desired primary colors on a proof image so as to produce composite dots, such as illustratively dot 100 shown in FIG. 1, that will depict each recipe color.

Although the proofing engine can accommodate a different specially colored media as well as a normal media, only one such media can be used to generate any one proof image. The order of these passes, for the "non-special" colors, is that specified in output color order field 625 shown in FIG. 6A. Therefore, the first occurrence of field 680 is for the first halftoning pass specified in output order field 625, the second occurrence of field 680 is for the next successive halftoning pass and so on for each of the remaining passes. Specifically, the constituent fields that form each one of pass parameter fields 680 are listed, with their accompanying reference numbers, and described below in Table 3.

55

Table 3 -- Pass Parameters Fields

Item	Description
5 Screen angle (681)	Floating point value between $\pm 180^\circ$ continuous specifying the screen angle for a corresponding pass;
Dot gain table (683)	String which identifies a dot gain table to use in this pass; and
10 Solid area density (685)	A signed byte between the values $\pm 22$ for a halftoning pass for a donor sheet color, or between $\pm 99$ for halftoning pass for a special media color.

As discussed above, for any image being proofed, a separate set of C,Y,M and/or K separations of that image but only for a given special color, is used to print each corresponding recipe color. For these particular separations, the specific dot gain table and solid area density information that would ordinarily occupy pass parameters field 680 is instead read from a corresponding recipe special color definition file, which is discussed in detail below in conjunction with FIG. 11. This file specifies the lay-down order of the primary colored component halftone dots as well as the corresponding solid area density correction values therefor.

FIG. 7 depicts a simplified high level block diagram of the process through which contone separation data is processed within processor 530 shown in FIGs. 5A and 5B to yield halftone image data for proofing engine 570 and specifically including the dot gain processing that occurs within RIP processor 530 for use in generating recipe colors in accordance with our invention. To simplify the following discussion, only the contone separation data for those separations used in generating a recipe color will be specifically discussed.

To facilitate the explanation of FIG. 7, assume for the moment that a proof request has reached the top of either the "rush" or "normal" queue and is now being processed to produce bit-mapped composite halftone dots for the first recipe color listed therein. As such, proof request queue handler and hard disk input/output (I/O) routines 740 will have sent, through lines not shown, an instruction to a particular CEPS specified in this request to obtain corresponding interleaved separation data therefor. In response to this instruction and through an appropriate interface (any one of interfaces 512 shown in FIGs. 5A and 5B), the interleaved CEPS data appears on line 517 shown in FIG. 7. Within RIP processor 530, this data is first translated and de-interleaved into different contone separation files by translation and de-interleaving process 710. In addition, the current proof request will have been applied, as symbolized by line 745, to proof request analysis process 750. This process, inter alia, accessed the accompanying definitional file for the recipe color delineated in that request. Based upon the order of the separations specified in this file for this recipe color and the names of the specific dot gain functions to be used therefor, process 750 selects, as symbolized by line 753, the particular dot gain look-up table from those residing within tables 720 for use in processing the incoming contone values provided by process 710 for each incoming separation for this first recipe color. Accordingly, each contone value in that separation file is then applied as input to this particular look-up table within tables 720 in order to impart the necessary amount of dot gain (either an increase or a decrease) to that value. Prior to processing the contone values for an incoming proof request, RIP processor 530 loads into tables 720 all the values for all the dot gain functions that are to be used in generating all the recipe colors listed in that request. Each resulting contone value produced by tables 720 is then applied to screening process 730 which converts the contone value into an appropriate bit-mapped component halftone dot therefor. Process 730 can be simplistically viewed as containing electronic dot generation process 733, which generates appropriate bit-mapped values, followed by dot font look-up table 736 which, based upon these values, supplies a particularly sized halftone dot pattern in a selected dot font. The particular font to use (e.g. diamond, elliptical, square, round, gravure or composed) is selected by proof request analysis process 750 based upon the value of the byte contained within "Dot Font" field 635 (see FIG. 6A) contained in the current proof request. The resulting halftone bit-mapped image data is then applied, as shown in FIG. 7, to proof request queue handler and hard disk I/O routines 740 for storage on that one of two hard disks 541 or 543 which is currently writing information for the current proof request. As noted above, the other hard disk is reading bit-mapped image data through process 740 for application, via image data bus 553, to proofing engine 570 for printing. This same processing is repeated in serial to generate an appropriate bit-mapped component halftone dot pattern for each of the other separation files for the first recipe color and is then successively repeated using the contone separation files, along with different corresponding dot gain look-up tables, to yield all the bit-mapped component halftone dot patterns for the second recipe color (assuming one is listed) in the current proof request.

Optional terminal 725, which is shown in dashed lines, can be connected directly to RIP and used by an operator to create or delete any of the dot gain functions stored within tables 720 or modify any of the specific values therefor. As noted above, these same functions can also be accommodated through operator PC 520



(see FIGs. 5A and 5B).

FIG. 8 depicts a block diagram of those components of proofing engine 570 that are germane to our present invention and specifically which provide solid area density correction in accordance with the teachings of our invention.

5 As shown, proofing engine 570 contains data interface module 810; density circuits 820<sub>1</sub>, 820<sub>2</sub>, ..., 820<sub>k</sub> collectively forming density circuits 820; laser drivers 830<sub>1</sub>, 830<sub>2</sub>, ..., 830<sub>k</sub> collectively forming laser drivers 830; laser diodes 840<sub>1</sub>, 840<sub>2</sub>, ..., 840<sub>k</sub> collectively forming laser diodes 840; and control circuitry 850. Bit-mapped image data appearing on image data bus 553 is routed, via data interface module 810, to density circuits 820. The output of data interface module 810 is applied through data bus 815 to density circuits 820<sub>1</sub>, 820<sub>2</sub>, ..., 820<sub>k</sub>, which, in turn, route their corresponding outputs, via lines 825<sub>1</sub>, 825<sub>2</sub>, ..., 825<sub>k</sub>, to laser drivers 830<sub>1</sub>, 830<sub>2</sub>, ..., 830<sub>k</sub>. These drivers each contain appropriate analog-to-digital converters and associated drive circuitry to convert the digital exposure levels applied thereto and appropriately energize lasers 840<sub>1</sub>, 840<sub>2</sub>, ..., 840<sub>k</sub>, via leads 835<sub>1</sub>, 835<sub>2</sub>, ..., 835<sub>k</sub>, to properly expose a corresponding separation pattern on each sublimation dye transfer donor sheet for a proof image.

15 The data appearing on image data bus 553 can either be sixteen successive halftone bits or two successive eight bit contone values. In the case of halftone data, the sixteen halftone bits, for any one separation, represent the state of sixteen successive pixels (writing spots) that are situated along a micro-raster for that separation in the proof image. Each density circuit operates on and writes a particular pattern, be it halftone or contone, for an eight-bit byte of the incoming sixteen bit data. As such, data interface module 810 appropriately de-multiplexes each sixteen-bit data word appearing on image data bus 553 into two eight-bit bytes. The high order eight-bit byte is applied to one density circuit, such as circuit 820<sub>1</sub>; while the low order byte is applied to the next density circuit, such as circuit 820<sub>2</sub>. Successive sixteen-bit data words are de-multiplexed and applied by the data interface module to successive corresponding pairs of density circuits in a round-robin fashion. In response to each incoming eight-bit value applied to a density circuit, that circuit appropriately sets the exposure of its associated laser diode. The laser diode will then write an appropriate halftone or contone pattern on the proof. If the incoming data to a density circuit is eight-bit halftone data, then that density circuit successively generates, through its associated laser diode, eight successive and corresponding writing spots at appropriate exposure levels to represent the "on" and "off" states thereof. Exposure levels are set to a twelve bit resolution with each halftone bit specifying either one of two of these levels. The density circuit uses a density look-up table, as discussed above and specifically shown in FIG. 9, to appropriately set each of these levels to yield the proper solid area density therefor. Alternatively, if an eight-bit contone value is to be written, then the density circuit sets the proper twelve bit exposure level of the associated laser diode to one of 256 values and then appropriately energizes the laser to write this value. Here too, the density circuit uses the look-up density table, with appropriate stored values, to transform the exposure level for the eight-bit contone value to yield the proper solid area density on the proof image for this contone value.

35 Control circuitry 850, which is connected to both image control bus 555 and serial message link 560, regulates, among other things, the amount of data that is transferred over image data bus 553 to interface module 810 based on marking speed of the proofing engine and controls the operation of each of the density circuits and each of the laser drivers.

40 FIG. 9 depicts a block diagram of illustrative density circuit 820<sub>1</sub> situated within proofing engine 570 shown in FIG. 8 and which specifically includes solid area halftone density conversion look-up table 940 for generating recipe colors in accordance with our inventive teachings.

As shown, density circuit 820<sub>1</sub> contains FIFO 910, shift register 920, switch 925, density look-up table 940 and control circuitry 950. Each incoming eight-bit byte applied from the data interface module and appearing over leads 815 is routed to FIFO 910. This FIFO is implemented using a random access memory (RAM) buffer and latches the incoming value. If the incoming byte represents an eight-bit contone value, then this byte is applied, via switch 925, directly to the address input of look-up table 940. This eight-bit value accesses a stored twelve-bit value from the look-up table, which, in turn, is applied as the appropriate exposure level, via leads 825<sub>1</sub>, to laser driver 830<sub>1</sub>. This look-up table has been previously loaded, as described above, with proper solid area density values to properly adjust the solid area density for each contone value.

55 Alternatively, if the incoming eight-bit byte appearing on lines 815, represents halftone data, then switch 925 is opened with the value of this byte being loaded in parallel into shift register 920. Thereafter, this shift register is operated to successively shift its contents one bit to the right and apply the value of the least significant bit in the register, via leads 930, as a one-bit address input to density look-up table 940. In the event this one-bit value is zero, then this indicates an even address input value with table 940 generating a pre-defined twelve-bit exposure value that is associated with the "off" state for a corresponding writing spot. Alternatively, if this one-bit value is one, then this indicates an odd address input with table 940 generating a pre-defined twelve-bit exposure value that is associated with the "on" state for a corresponding writing spot. Hence,

in response to each eight-bit halftone data byte applied to density circuit 820<sub>1</sub>, this circuit will produce the desired exposure level of the corresponding "on" or "off" state for each of eight successive writing spots. Control circuitry 950, which is connected, via lead 860, to control circuitry 850 (see FIG. 8) in the proofing engine and, via leads 952, 954 and 956, as shown in FIG. 9, to FIFO 910 and density look-up table 940 provides overall control of density circuit 820<sub>1</sub> and individual control of all the components situated therein. In addition, the control circuitry also generates, as needed, a pre-defined twelve-bit exposure level on leads 958 for use in calibrating the laser diode connected to laser driver 830<sub>1</sub>. In addition, look-up table 940 is preferably implemented using a dual ported RAM which is loaded with pre-defined twelve-bit values, via port P<sub>1</sub>, through control circuitry 950 and which supplies output values through port P<sub>2</sub>.

FIG. 10 depicts recipe colors selection screen display 1000, that is generated at operator PC 520 situated within DDCP system 500 shown in FIGs. 5A and 5B. Through this screen display, the DDCP operator can list those recipe colors for which definitional (i.e. set-up) data is stored on raster image processor 510, create a file of data for a new recipe color and/or select such a file for an existing recipe color that is to be modified. The DDCP operator accesses this screen through an interactive screen displayed menu driven user interface provided through operator PC 520 (see FIGs. 5A and 5B). Inasmuch as the specific software for generating screen displays 1000 and 1100 (the latter being shown in FIG. 11) and the interaction of this software with processor 530 within RIP 510 (see FIGs. 5A and 5B) to implement the functions specified through these displays would all be readily apparent to those skilled in the art, the software will not be discussed in any detail.

Once screen display 1000 appears on display and keyboard 521, this display, as shown in FIG. 10, presents a list to the operator of all the available recipe colors that have been previously defined, i.e. "set-up", and are currently stored within RIP 510. Through this list, the operator can select any recipe color to edit. Creation of a new recipe color entails copying the definition for an existing recipe color, then editing its contents as needed and finally saving the edited definition with a new recipe color name. Various user functions that can be used with this screen display are implemented using program defined "soft" function keys. Specifically, the "Enter" function provides the function of actually entering operator responses into the screen. The "Delete" function, when invoked, prompts the operator for a name and number of a recipe color to be deleted and, once this information has been entered, thereafter prompts the operator to verify a delete operation. Once verification is provided, the "Delete" function merely deletes the definition for the chosen recipe color from the DDCP system. The "Rename" function permits an operator to rename any selected recipe color in the displayed list under a different name. The "Copy" function, when invoked, creates a duplicate of a selected recipe color definition under a new name supplied by the DDCP operator. Lastly, through the "Prev" and "Next" functions, the DDCP operator can scroll between and display previous and next successive screens of listed recipe colors, where the number of such colors exceeds those which can be displayed on a single display screen.

Once a recipe color has been selected or an existing definition has been copied as a definition for a new recipe color, then operator PC 520 will cause Recipe Colors Setup Screen Display 1100 to appear for that particular recipe color on display and keyboard 521 shown in FIG. 5. Through this screen, the DDCP operator can appropriately edit the parameters that define this recipe color.

Specifically, as shown in FIG. 11, the definitional, i.e. "set-up", information for a recipe color includes the screen ruling, the specific primary process colors (C,Y,M and/or K) to use, the lay-down order of these colors, the solid area density (in relative terms) for each of these primary colors and the specific dot gain table (function) to use for each of these colors. For example, for the recipe color named "Pink 45" (abbreviated as "Pnk45") shown in FIG. 11, this color is produced through a recipe calling for a recommended screen ruling of 4.8 with cyan, yellow, magenta and black component halftone dots being laid down in that order with corresponding solid area densities of +3, -1, 0 and +12 and pre-defined dot gain tables having the names "Number 9", "Number 6", "MagDotG", and "StdBP", respectively, to appropriately size the component halftone dots. The recommended screen ruling is provided for informational purposes and can be filled in by the individual who establishes the definition for the recipe color. In fact, separate definitions can be established and saved under appropriate names with the DDCP system for the same recipe color but with different screen rulings, if desired. Through the "Save" function, the DDCP operator can save a recipe color definition under its current filename. Through the "Select" function, the operator can select the component primary color to that is to be edited or moved up or down the list so as to change the lay-down order. The "Move" function permits the DDCP operator to move a component primary color to a different position in the displayed lay-down order. The "Edit" function, when invoked, permits the DDCP operator to change any parameter value for a selected primary color. Lastly, the "Quit" function causes the operator PC to exit the procedure that generated screen display 1100 and move to a higher level display screen.

Although, for purposes of flexibility and simplification, separate dot gain and density tables are used for each different primary color that is to be used in conjunction with each recipe color, these tables could be combined, in some fashion, for each such color, if desired. Furthermore, although separate look-up tables are also

used to store each different dot gain function for each different primary color to generate each recipe color, these tables could also be combined in a common memory with appropriate addressing used to select the appropriate entries.

In addition, although we have discussed our invention in terms of using accurate dot-on-dot placement of component halftone dots of varying size and solid area density to yield a composite dot, these component halftone dots could also be skewed (i.e. not concentrically aligned) with respect to each other, by pre-defined positional offsets, to yield a corresponding composite dot. Use of such a variable offset will provide an additional degree of freedom that, when integrated by the human eye in conjunction with changing dot size and solid area density, may further expand the range of available recipe colors that could be produced by merely changing the dot size and solid area density of primary colored component halftone dots. Inasmuch as the varying positional offsets may give rise to objectionable Moire or other visually apparent periodic patterns in the proof, a small amount of random or pseudo-random noise may need to be injected into the positional addresses of each of these offsets, and for each component dot, to eliminate these patterns. Further along these lines, pre-defined look-up tables of positional offsets could also be included to appropriately locate the placement of each component dot in a composite dot given the desired recipe color to be obtained thereby. In this instance, a specific offset table could be used for each specific recipe color that is desired. Alternatively, such a table could merely specify the range of recipe colors that could be achieved through positional offsetting of each individual component dot with interpolation being used to calculate the appropriate positional offset value of each such dot needed to yield an intermediate recipe color.

Although one embodiment of the present invention has been shown and described in detail herein, many other embodiments that incorporate the teachings of our invention may be easily constructed by those skilled in the art.

#### INDUSTRIAL APPLICABILITY AND ADVANTAGES

The present invention is useful in direct digital color proofing (DDCP) systems and particularly in such a system for modelling a desired color(s) that can be obtained through use of a multi-color, e.g. five or six color, printing press but is not reproducible within a color gamut associated with a primary colored, e.g. C,Y,M,K, halftone proof image. Through use of this invention, a color proof image can be fabricated to depict a much wider range of colors which will simulate a color halftone image that will be produced by such a multi-color press than has been heretofore be achievable in the art.

#### **Claims**

1. A method of generating a desired color in an output image from a plurality of different colorants, said output image being a halftone depiction of a continuous tone (contone) input image, the method comprising the steps of:

obtaining data representing a plurality of primary colored contone separations of said input image, each of said separations having incoming contone values wherein corresponding ones of said incoming contone values for all of said separations collectively define a region in the output image that is to contain the desired color;

generating, in response to each one of the incoming contone values in each of said separations, a halftone dot wherein size and solid area density of the dot are pre-defined functions of the one incoming contone value and a separation color associated therewith so as to form a plurality of component halftone dots;

printing, in said output image, spatially corresponding ones of said component halftone dots, each from a different corresponding one of said separations and with a corresponding one of said colorants, on a dot-on-dot basis in a pre-defined order and with a pre-defined registration thereamong so as to form composite halftone dots which collectively depict said desired color.

2. The method in claim 1 wherein said generating step comprises the steps of:

modifying the incoming contone values contained in each one of the separations in accordance with a pre-defined dot gain relationship in order to yield corresponding modified contone values, wherein said modified contone values contain a pre-determined variation in dot gain with respect to corresponding ones of said incoming contone values; and

converting each of said modified contone values for each one of said separations into a halftone dot having a pre-defined solid area density value so as to form said component dots for said one separation.

ration, wherein said solid area density value is a predefined function of a separation color associated therewith.

- 5 3. The method in claim 2 wherein the printing step comprises the step of overlaying a spatially corresponding one of said component halftone dots from each of said separations on a concentric basis in order to form a corresponding one of the composite halftone dots.
4. The method in claim 3 wherein each of said colorants is a different primary color.
- 10 5. The method in claim 4 wherein said different colorants are cyan, magenta and yellow-and black colorants.
6. The method in claim 3 wherein said incoming contone values modifying step comprises the step of applying each of said incoming contone values for said one separation through a first look-up table in order to produce corresponding ones of said modified contone values, said look-up table containing stored values that collectively define a pre-defined dot gain function for the separation color associated with said one separation.
- 15 7. The method in claim 6 wherein said first look-up table comprises a plurality of separate dot gain look-up tables, wherein each one of the plurality of dot gain look-up tables stores a pre-defined dot gain function for a different separation color; and wherein said incoming contone values applying step comprises the step of routing each one of the incoming contone values for said one separation through the dot gain look-up table associated therewith.
- 20 8. The method in claim 7 wherein said applying step further comprises the step of reading, prior to modifying any of said incoming contone values, each of said dot gain look-up tables from a memory so as to form said first look-up table.
- 25 9. The method in claim 3 wherein said modified contone values converting step comprises the step of varying intensity levels of a writer used to print each of said component halftone dots associated with said one separation in accordance with a pre-defined solid area density relationship, wherein the pre-defined solid area density relationship characterizes an exposure level for each writing spot that is to form said component halftone dot based on whether said each writing spot is to be darkened or not and the separation color associated therewith.
- 30 10. The method in claim 9 wherein said varying step comprises the step of: applying each bit-mapped value for each of said component halftone dots through a second look-up table in order to produce corresponding ones of the intensity levels, said second look-up table containing stored values for the predefined solid area density relationship for the separation color associated with said one separation.
- 35 11. The method in claim 10 wherein said second look-up table comprises a plurality of separate solid area density look-up tables wherein each of the plurality of solid area density look-up tables stores a pre-defined solid area density relationship for a different separation color; and wherein the bit-mapped values applying step comprises the step of routing each one of the bit-mapped values for said one separation through the solid area density look-up table associated therewith.
- 40 12. Use of the method as defined in any of the preceeding claims in a direct digital color proofing system for generating a color halftone proof image from in-coming digitized prepress continuous tone (contone) data for an input image, said system having means for processing the incoming prepress contone data to yield screened primary colored halftone separation data representing halftone separations that are to collectively form the proof image, a marking engine for writing each of said halftone separations with proper registration so as to form said proof image, and control means connected to said processing means and said marking engine.
- 45 50 13. Apparatus for generating a desired color in an output image from a plurality of different colorants, said output image being a halftone depiction of a continuous tone (contone) input image, the apparatus comprising:  
55 means for obtaining data representing a plurality of primary colored contone separations of said input image, each of said separations having incoming contone values wherein corresponding ones of said incoming contone values for all of said separations collectively define a region in the output image

that is to contain the desired color;

means for generating, in response to each one of the incoming contone values in each of said separations, a halftone dot wherein size and solid area density of the dot are pre-defined functions of the one incoming contone value and a separation color associated therewith so as to form a plurality of component halftone dots;

means for printing, in said output image, spatially corresponding ones of said component halftone dots, each from a different corresponding one of said separations and with a corresponding one of said colorants, on a dot-on-dot basis in a pre-defined order and with a pre-defined registration thereamong so as to form composite halftone dots which collectively depict said desired color.

14. The apparatus in claim 13 wherein said generating means comprises:

means for modifying the incoming contone values contained in each one of the separations in accordance with a pre-defined dot gain relationship in order to yield corresponding modified contone values, wherein said modified contone values contain a predetermined variation in dot gain with respect to corresponding ones of said incoming contone values; and

means for converting each of said modified contone values for each one of said separations into a halftone dot having a pre-defined solid area density value so as to form said component dots for said one separation, wherein said solid area density value is a pre-defined function of a separation color associated therewith.

15. The apparatus in claim 14 wherein the printing means overlays a spatially corresponding one of said component halftone dots from each of said separations on a concentric basis in order to form a corresponding one of the composite halftone dots.

16. The apparatus in claim 15 wherein each of said colorants is a different primary color.

17. The apparatus in claim 16 wherein said different colorants are cyan, magenta and yellow and black colorants.

18. The apparatus in claim 15 wherein said incoming contone values modifying means comprises:

a first look-up table containing stored values that collectively define a pre-defined dot gain function for the separation color associated with said one separation; and

means for applying each of said incoming contone values for said one separation through the first look-up table in order to produce corresponding ones of said modified contone values.

19. The apparatus in claim 18 wherein said first look-up table comprises a plurality of separate dot gain look-up tables, wherein each one of the plurality of dot gain look-up tables stores a pre-defined dot gain function for a different separation color; and wherein said incoming contone values applying means comprises means for routing each one of the incoming contone values for said one separation through the dot gain look-up table associated therewith.

20. The apparatus in claim 15 wherein said modified contone values converting means comprises means for varying intensity levels of a writer used to print each of said component halftone dots associated with said one separation in accordance with a pre-defined solid area density relationship, wherein the pre-defined solid area density relationship characterizes an exposure level for each writing spot that is to form said component halftone dot based on whether said each writing spot is to be darkened or not and the separation color associated therewith.

21. The apparatus in claim 20 wherein said varying means comprises:

a second look-up table containing stored values for the pre-defined solid area density relationship for the separation color associated with said one separation; and means for applying each bit-mapped value for each of said component halftone dots through the second look-up table in order to produce corresponding ones of the intensity levels.

22. The apparatus in claim 21 wherein said second look-up table comprises a plurality of separate solid area density look-up tables wherein each of the plurality of solid area density look-up tables stores a pre-defined solid area density relationship for a different separation color; and wherein the bit-mapped values applying means comprises means

for routing each one of the bit-mapped values for said one separation through the solid area density look-

up table associated therewith.

23. A direct digital color proofing system for generating a color halftone proof image from incoming digitized pre-press continuous tone (contone) data for an input image, said system having means for processing the incoming pre-press contone data to yield screened primary colored halftone separation data representing halftone separations that are to collectively form the proof image, a marking engine for writing each of said halftone separations with proper registration so as to form said proof image, and control means connected to said processing means and said marking engine, wherein said system comprises an apparatus as defined in any of claims 13 to 22.
24. The system as defined in claim 23 when appendant to claim 15 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.
25. The system as defined in claim 23 when appendant to claim 19 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.
26. The system in claim 23 when appendant to claim 22 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.

FIG. 1



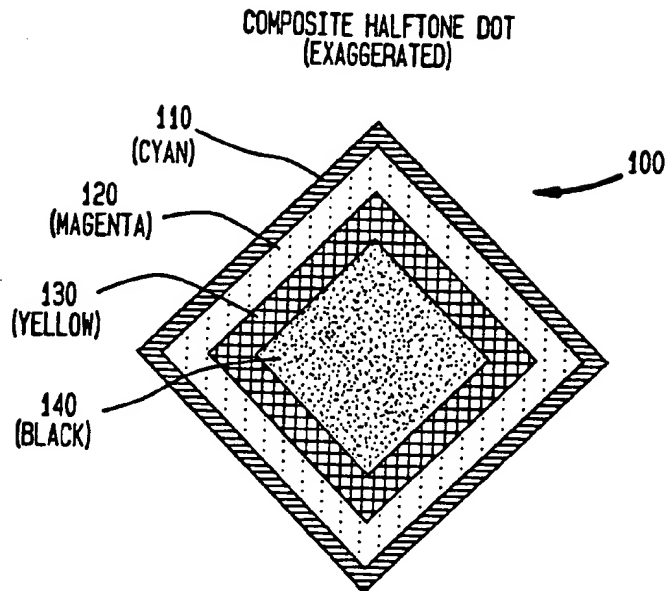


FIG. 2

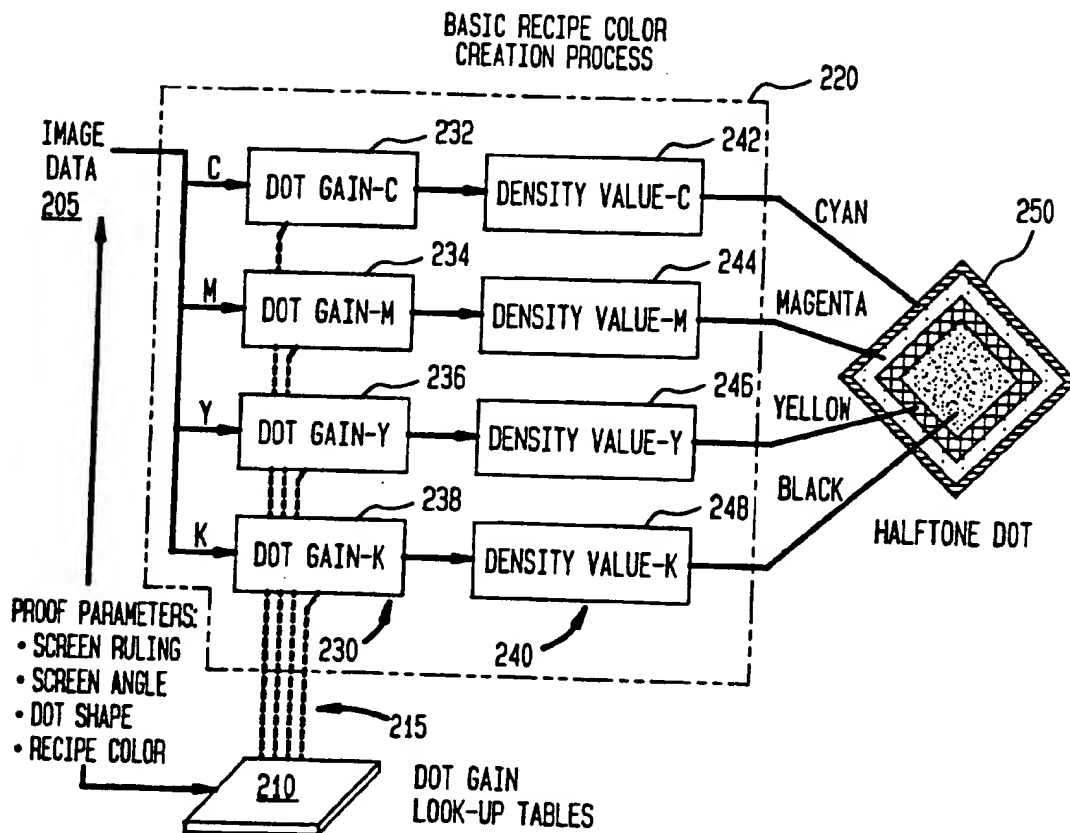

DOT GAIN CURVES

**FIG. 3**  
(PRIOR ART)

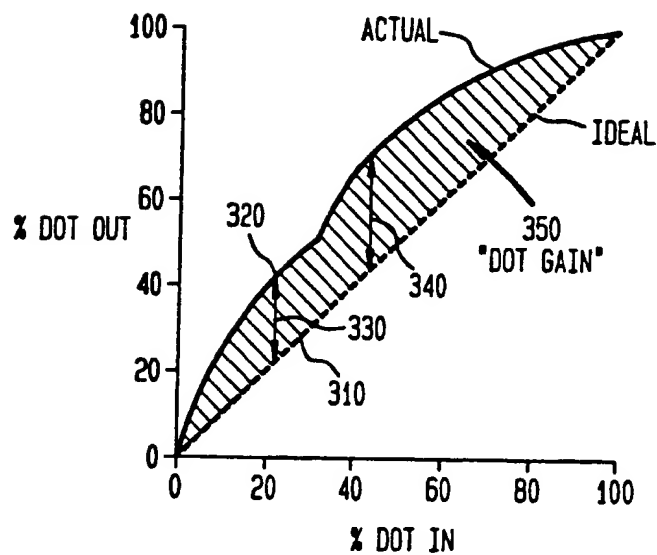

**FIG. 4**

DOT GAIN  
FUNCTIONS FOR  
AN ILLUSTRATIVE  
RECIPE COLOR

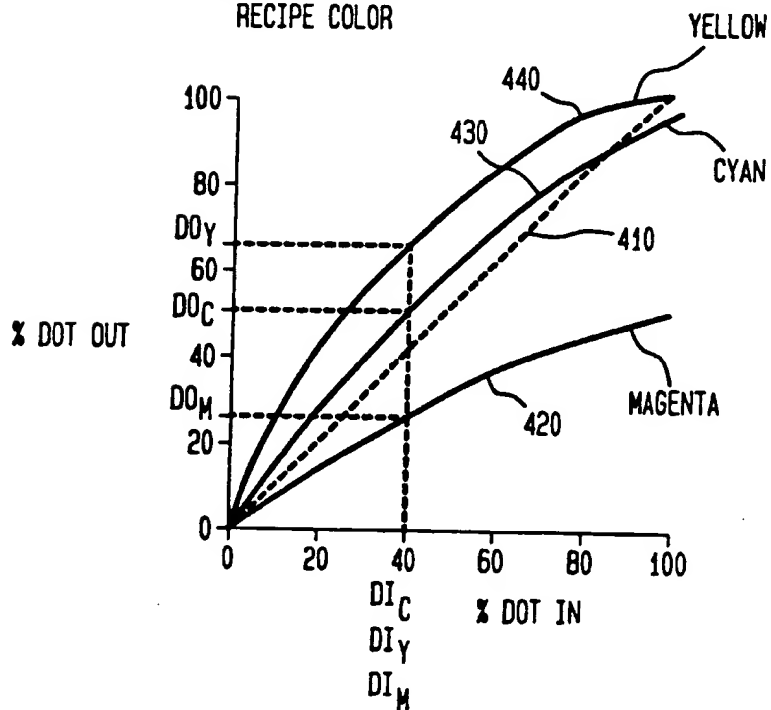




FIG. 5A


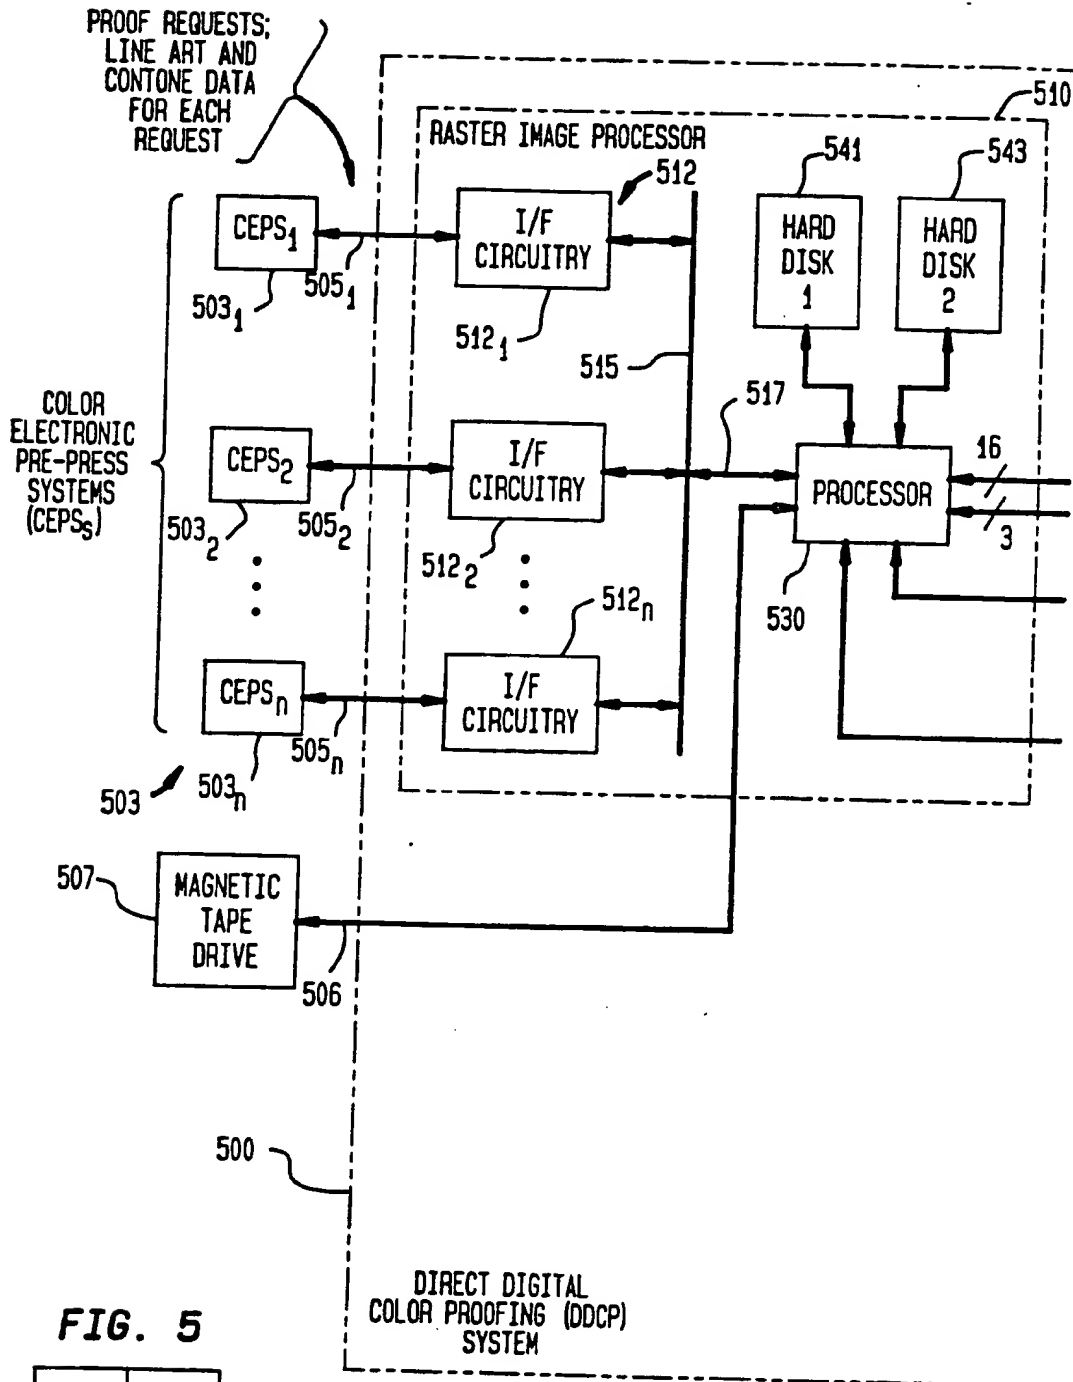



FIG. 5

FIG. 5A	FIG. 5B
------------	------------


FIG. 5B

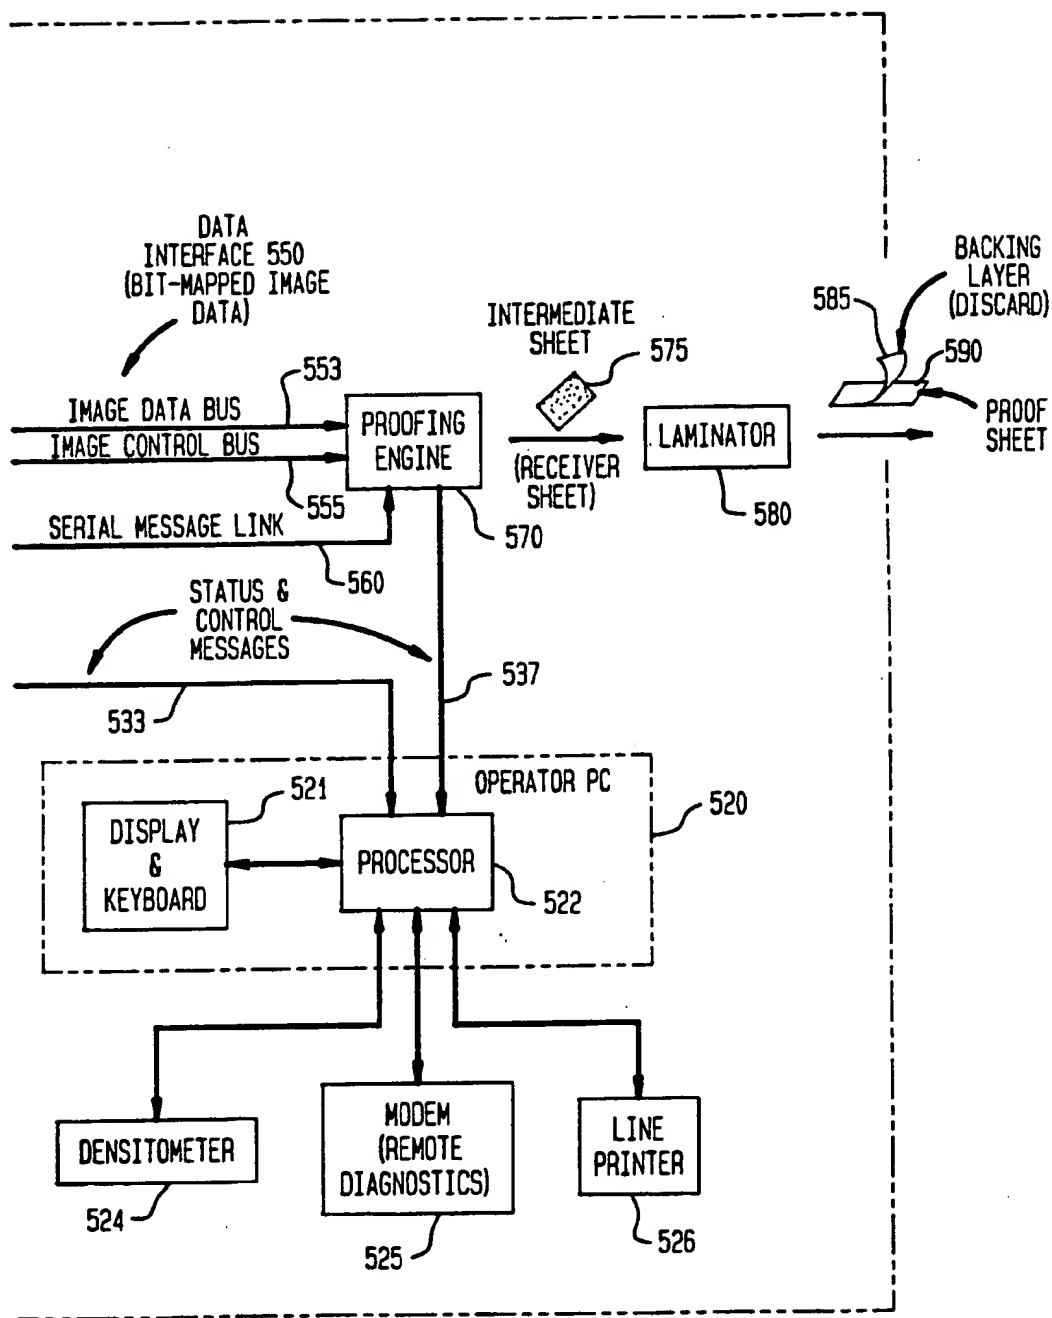


**FIG. 6A**

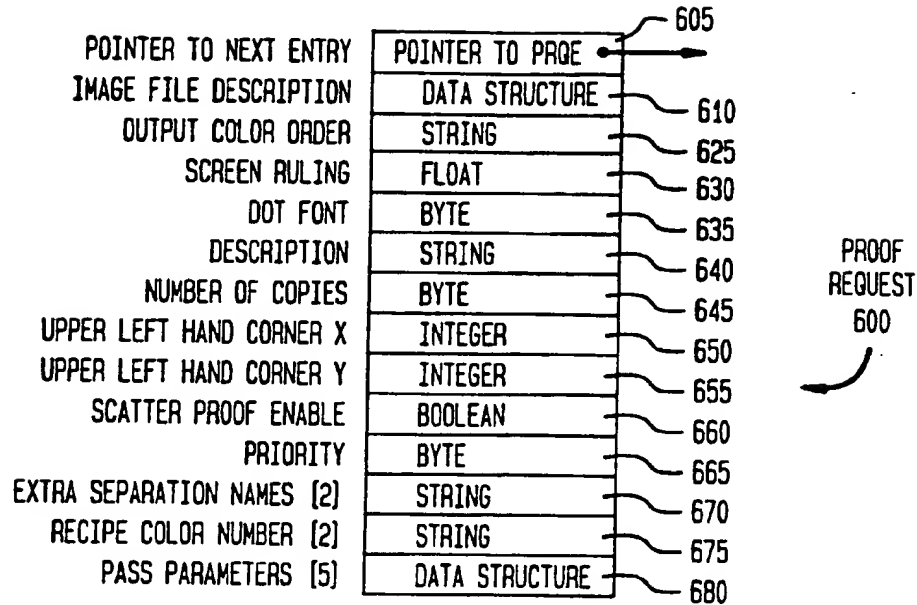

**FIG. 6B**

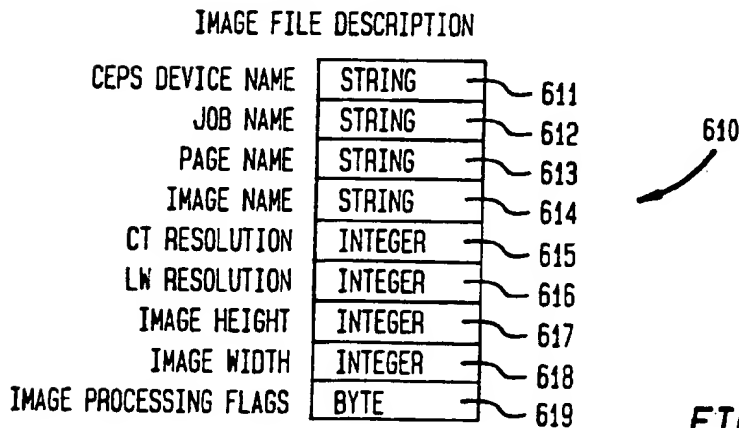

**FIG. 6D**

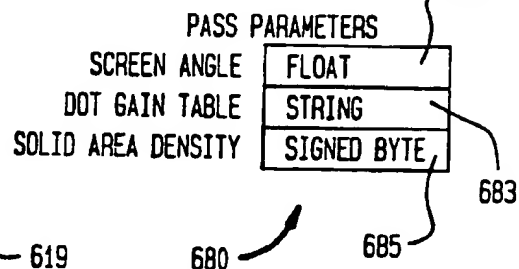

**FIG. 6C**

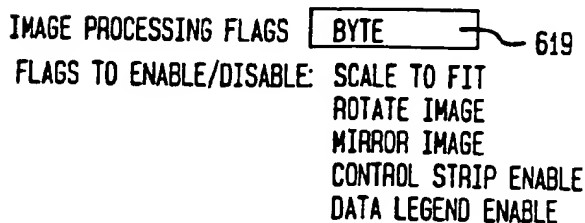


FIG. 7

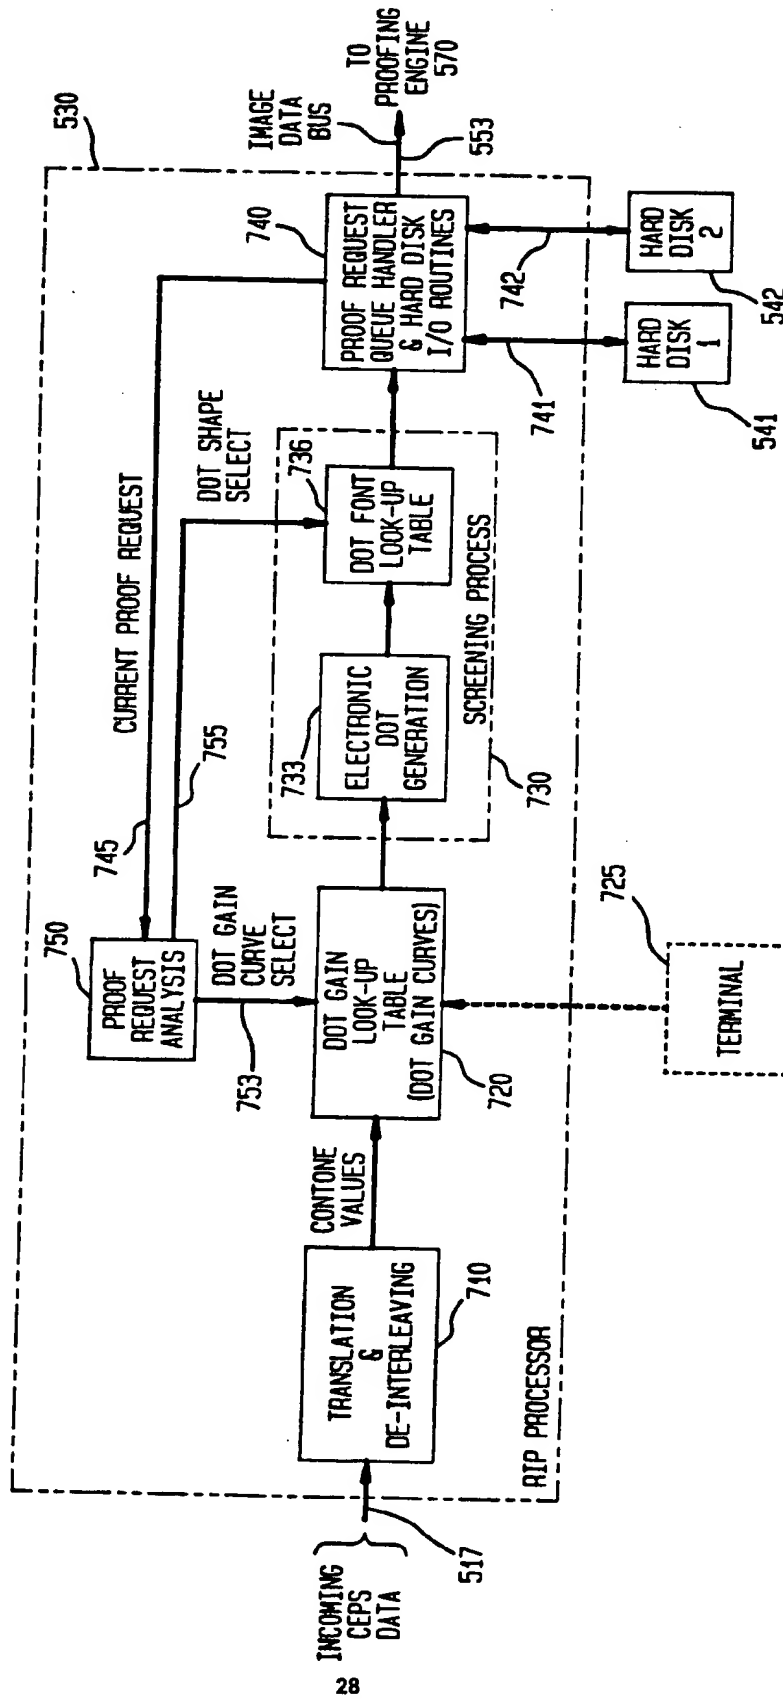


FIG. 8


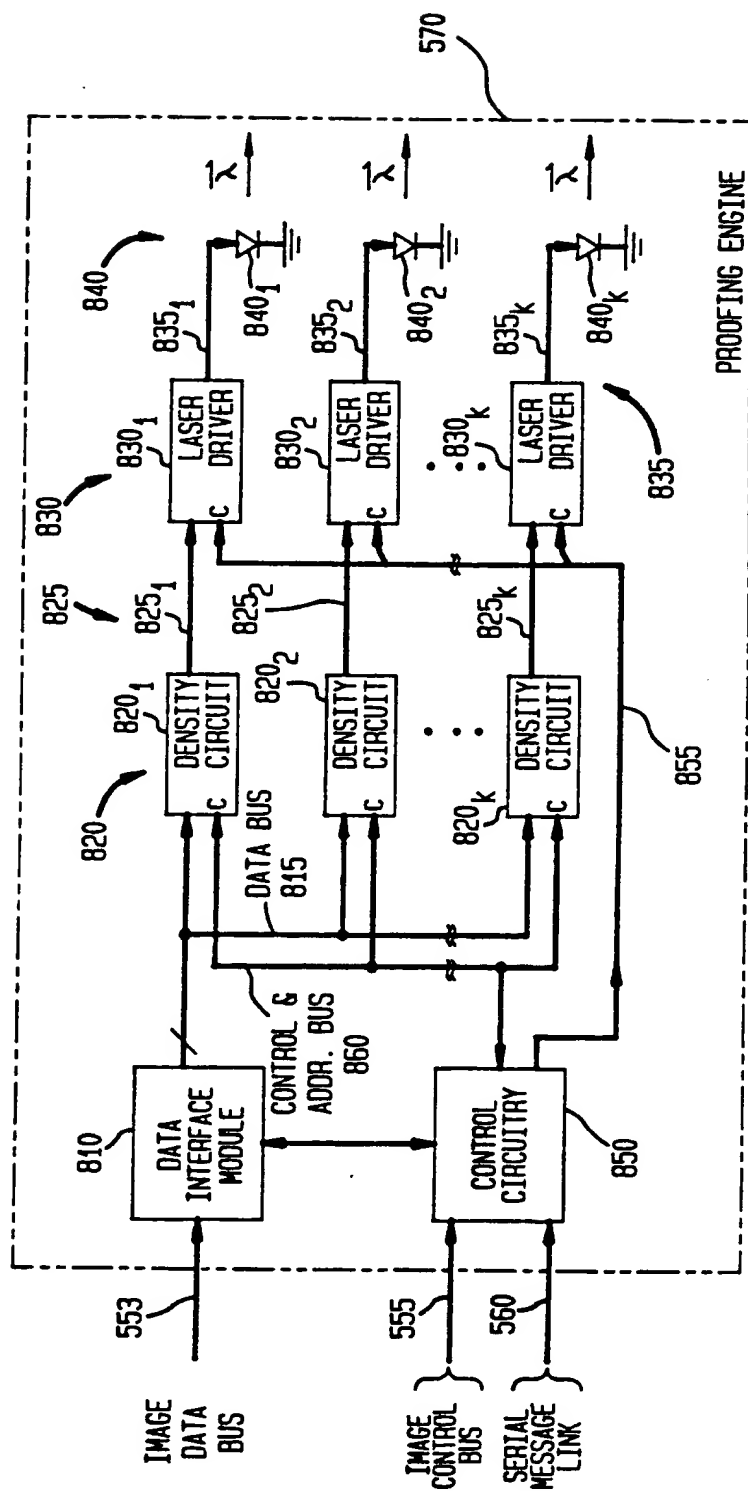


FIG. 9

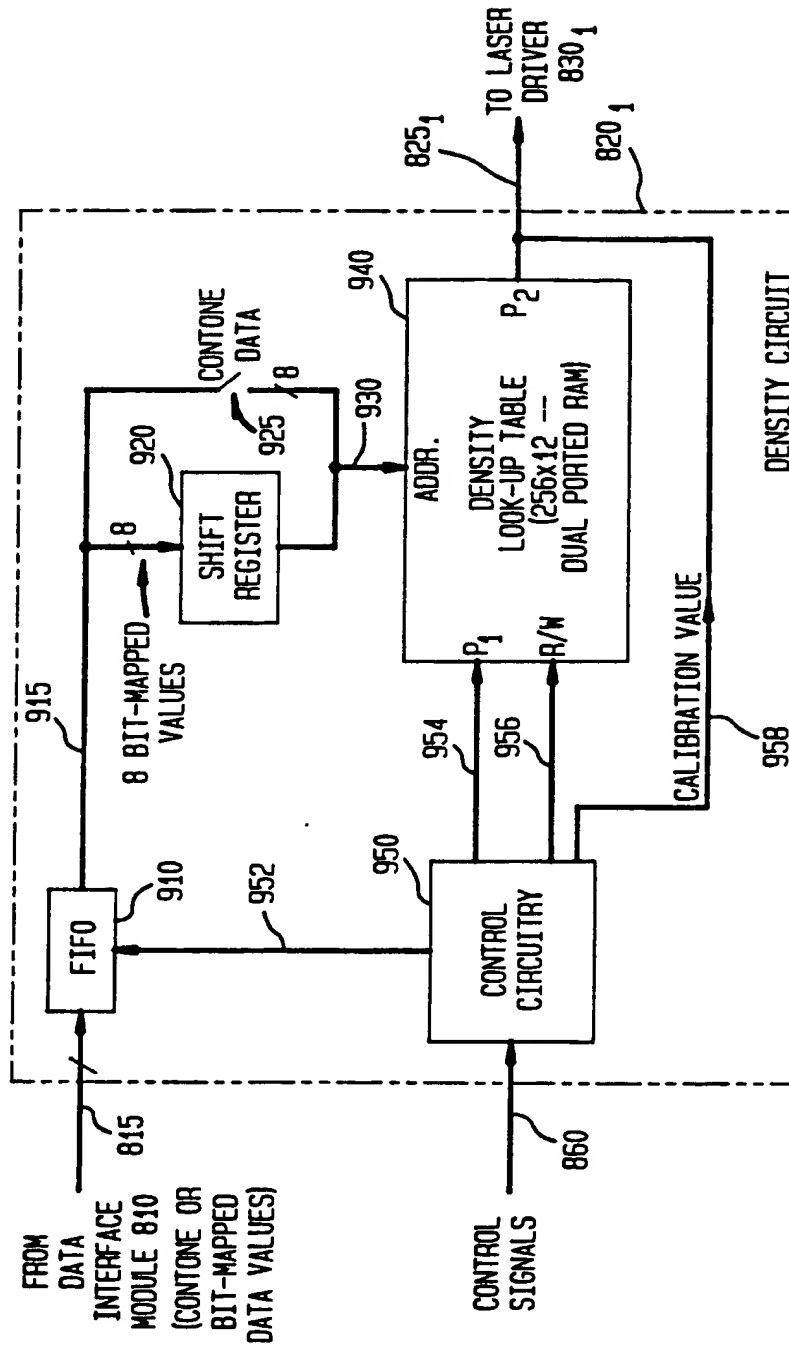

**FIG. 10**  
 RECIPE  
 COLORS  
 SELECTION  
 SCREEN  
 DISPLAY

1000 →

Recipe Special Colors Selection							
Create/Modify Recipe Special Color							
Pnk45							
Khak1							
COLOR312							
COLOR122							
COLOR413							
COLOR163							
EK Yellow							
Enter Recipe Name:							
function keys:							
Exit	Enter	Delete	Re-name	Copy	Prev	Next	

**FIG. 11**  
 RECIPE  
 COLORS  
 SETUP  
 SCREEN  
 DISPLAY

1100 →

Recipe Special Colors Setup							
Recipe Special Color Name: Pnk45							
Recommended Screen Ruling: 4.8							
Colors (in lay- down order)	Den- sity	Dot Gain Table					
Cyan	+3	Number 9					
Yellow	-1	Number 6					
Magenta	0	MagDot6					
Black	+12	StdBP					
function keys:							
Save	Select	Move	Edit				Quit



(11) Publication number : **0 533 593 A3**

(12) **EUROPEAN PATENT APPLICATION**

(21) Application number : **92420294.8**

(51) Int. Cl.<sup>5</sup> : **H04N 1/46**

(22) Date of filing : **07.09.92**

(30) Priority : **18.09.91 US 761597**

(43) Date of publication of application :  
**24.03.93 Bulletin 93/12**

(84) Designated Contracting States :  
**DE DK FR GB NL**

(88) Date of deferred publication of search report :  
**28.07.93 Bulletin 93/30**


(71) Applicant : **EASTMAN KODAK COMPANY**  
**343 State Street**  
**Rochester, New York 14650-2201 (US)**

(72) Inventor : **Barry, Robert Vanselow, c/o**  
**Eastman Kodak Company**  
**Patent Legal Staff, 343 State Street**  
**Rochester, New York 14650-2201 (US)**  
Inventor : **Ambro, Joseph Hayes, c/o Eastman**  
**Kodak Company**  
**Patent Legal Staff, 343 State Street**  
**Rochester, New York 14650-2201 (US)**

(74) Representative : **Buff, Michel et al**  
**Kodak-Pathé Département des Brevets et**  
**Licences CRT Centre de Recherches et de**  
**Technologie Zone Industrielle**  
**F-71102 Chalon sur Saône Cédex (FR)**

(54) **A technique for generating additional colors in a halftone color image through use of overlaid primary colored halftone dots of varying size.**

(57) A technique for use in a direct digital color proofing (DDCP) system (500) for printing a "modelling" color(s) in a halftone color proof image such that the modelling color simulates a ("special") color that does not lie within a gamut of colors reproducible through only primary color (e.g. cyan, magenta, yellow and black) halftone printing. Specifically, a wide range of such modelling colors can be produced by independently and appropriately setting dot size, particularly in combination with solid area density, for the halftone dots (110, 120, 130, 140) produced for different primary colors and then printing the resulting dots on an overlaid dot-on-dot basis with proper registration. Appropriate dot gain and density look-up tables (230, 720 ; 240, 940) are respectively used to transform continuous tone separation values and bit-mapped data to vary dot size and solid area density of these halftone dots for each such primary color prior to printing these dots using a proofing engine. A unique set of tables is used to produce each different modelling color.

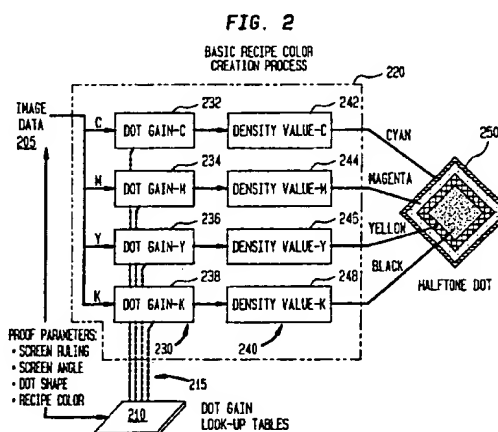





European Patent  
Office


# EUROPEAN SEARCH REPORT

Application Number

EP 92 42 0294

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
A	EP-A-0 357 191 (ADOBE SYSTEMS INC) * column 2, line 15 - line 37 * * abstract; claim 1 *	1,13,23	H04N1/46
A	EP-A-0 260 891 (CROSFIELD ELECTRONICS LTD) * column 1, line 45 - column 3, line 22 * * abstract; figure 3 *	1,13,23	
A	EP-A-0 184 289 (CROSFIELD ELECTRONICS LTD) * page 3, line 4 - page 4, line 6 * * abstract *	1,13,23	
			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			H04N
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 26 MAY 1993	Examiner ISA S.
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 150 (01.82 (P0401)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 533 593 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**26.02.1997 Bulletin 1997/09**

(51) Int Cl.<sup>6</sup>: **H04N 1/46**

(21) Application number: **92420294.8**

(22) Date of filing: **07.09.1992**

(54) **A technique for generating additional colors in a halftone color image through use of overlaid primary colored halftone dots of varying size**

Verfahren zum Generieren von zuzätzlichen Farben in einem Halbtonfarbbild durch Überlagerung von grundfarbig gefärbten Halbtonpunkten von verschiedener Grösse

Procédé pour générer des couleurs supplémentaires dans une image de couleur demi-teinte en superposant des points demi-teintés de couleur primaire et de tailles différentes

(84) Designated Contracting States:  
**DE DK FR GB NL**

(30) Priority: **18.09.1991 US 761597**

(43) Date of publication of application:  
**24.03.1993 Bulletin 1993/12**

(73) Proprietor: **EASTMAN KODAK COMPANY**  
**Rochester, New York 14650-2201 (US)**

(72) Inventors:  
• **Barry, Robert Vanselow,**  
**c/o Eastman Kodak Company**  
**Rochester, New York 14650-2201 (US)**

• **Ambro, Joseph Hayes,**  
**c/o Eastman Kodak Company**  
**Rochester, New York 14650-2201 (US)**

(74) Representative: **Buff, Michel et al**  
**Kodak-Pathé**  
**Département des Brevets et Licences CRT**  
**Centre de Recherches et de Technologie**  
**Zone Industrielle**  
**71102 Chalon sur Saône Cédex (FR)**

(56) References cited:  
**EP-A- 0 184 289** **EP-A- 0 260 891**  
**EP-A- 0 357 191**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 0 533 593 B1**

**Description****TECHNICAL FIELD OF THE INVENTION**

5 The invention relates to direct digital color proofing systems and specifically to a technique for use in such a system for printing additional color(s) in a halftone color image by appropriately setting dot size, particularly in conjunction with solid area density, of primary colored (e.g. cyan, magenta, yellow and black) halftone dots and then overlaying these dots with proper registration.

**BACKGROUND ART**

Graphic arts applications frequently require the accurate reproduction of a high resolution color image (commonly referred to as an "artwork"), such as a color photograph, a color drawing, a color layout and the like. A typical application might involve printing a high resolution color image or a series of such images on a page of a periodical, such as a magazine, or a corporate annual report.

15 In order to verify that a conventional color printing process generates a color halftone image that is an accurate reproduction of an original color artwork, a so-called "proof" image is generally made from a series of halftone separations of the artwork. The proof image is taken to be representative of the reproduced halftone image that will be generated by a multi-color printing press. Oftentimes, the proof image contains unexpected and unsightly Moire patterns, poor tone and/or color reproduction, or other artifacts which generally can be removed through appropriate rotation of a screen angle used in generating one or more of the separations or through appropriate color corrections. Once these adjustments are made, new separations are produced. Thereafter, the entire proofing process is iteratively repeated until a set of separations is found which will yield an acceptable depiction of the artwork.

25 The conventional iterative manual photographic process of producing an acceptable set of halftone separations, due to the inherent variability of the process, can be very tedious and inordinately time consuming. Unfortunately, in the graphic arts industry, publication deadlines are often extremely tight and afford very little, if any, leeway. Consequently, the available time in a graphic arts production environment allotted to a color technician to generate a set of halftone separations to meet a particular publication deadline, for example, is often insufficient to allow the technician adequate time, due to the trial and error nature of iterative process, to generate that set of separations which produces a very high quality halftone color image. As such, the technician is often constrained by time pressures to produce a set of separations that produces a visually acceptable, though not necessarily a very high quality, image.

35 In an effort aimed at reducing the time required and accompanying expense associated with the proofing process, the art has turned away from conventional manual photographic based proofing processes, particularly for use in high volume graphic arts applications, to other technologies. One of the first such technologies was electro-photography based proofing; an illustrative system employing this technology is described in United States patent 4,708,459 (issued to C. Cowan et al on November 24, 1987 and assigned to the present assignee hereof -- hereinafter referred to as the '459 Cowan et al patent). While this system does produce an excellent quality proof, this system appears to possess various limitations which, to a certain extent, have restricted its commercial attractiveness.

40 Specifically, many printing presses today utilize five or six differently colored inks. Typically, four of these inks are the primary colors: cyan, magenta, yellow and black (C,Y,M,K), with two additional inks being so-called "special" fifth and sixth colors. For the most part, printing presses fix the density at which a single colored halftone dot is printed, i. e. either the press deposits a fixed quantity of ink at a particular location on a page or not. As such, it has become apparent in the art for quite some time that a significant number of colors, such as for example phosphorescents (e. g. "hot pink"), pastels and golds, will fall outside the bounds of a gamut of colors that can be printed using only these four primary colors at fixed density levels. Accordingly, these colors, hereinafter referred to as "special" colors, can not be readily reproduced through the use of fixed density halftone printing using the four primary colored inks alone. As such, whenever such a special color is desired, an ink that has been specifically mixed to that color is generally used as either the fifth or sixth colored ink. Using that ink, the special color is printed in accordance with the halftone dot patterns on a corresponding separation for that color of an original artwork. In addition, from time to time, a printing job may call for an exact color, such as illustratively so-called "KODAK" yellow, that lies within the gamut associated with the four primary colors. ("KODAK" is a registered trademark of the Eastman Kodak Company of Rochester, New York.) However, to provide higher quality color reproductions and increased reliability of the color reproduction process than that generally obtainable through use of only fixed density primary color printing, a fifth or sixth ink that has been mixed to that specific color will be used, rather than the primary colors, to tone corresponding areas of each halftone reproduction.

55 EP-A- 184,289 and EP-A- 260,891 describes the use of a "special" color for printing.

In view of five and six color halftone color printing, a concomitant need has arisen for some time in the art to be able to model both the fifth and sixth colors within a proof image. Generally speaking, this modelling could be accom-

plished through either of two approaches. First, one approach might be to produce a separate film within the proofing process for each special color that is to be used and then use an ink that has been matched to that color to tone corresponding halftone dot patterns therefor in the proof image. Unfortunately, this approach is likely to be quite expensive and cumbersome to implement and use. Fortunately, a reasonably close, rather than an exact, match is often adequate for use in analyzing a proof image for defects, particularly when a viewer is concerned with page layout, i.e. the areas on the proofed image in which corresponding portions of the replicated artwork are to appear, and the like. Accordingly, a second approach might be to produce a corresponding resultant color in some fashion through use of the four primary colors which, while being a reasonably close rather than an exact match to each special color, will nevertheless represent each of the special colors that is to be used.

The electro-photographic proofing system described in the US-A- 4,708,459 Cowan et al patent permits an operator to independently set the solid area density, over a reasonably wide range, of the halftone dots for each primary color. In this manner, dots of a different solid area density can be produced for each different primary color in a given proof image. Then, by accurately superimposing the primary colored halftone dots with different corresponding solid area densities in a common proof image, an extended range of colors, at least to a human observer, can be produced for use in simulating a special color(s). Unfortunately, in practice, this range, while greater than that obtainable without varying the solid area density between dots of different primary colors, nevertheless proved to be somewhat inadequate for use in modelling various special colors.

For a variety of reasons, such as for example, increased flexibility, control and throughput over that provided by electro-photographic proofing systems, the art is currently turning towards the use of so-called direct digital color proofing (DDCP) systems. These systems directly generate a halftone color proof image from a set of digitized continuous tone (contone) separations. Specifically, DDCP systems manipulate the separations in digital form to electronically generate appropriate halftone separations, including, inter alia, electronic screening and dot gain compensation, and then directly write the proof image using an appropriate marking engine (also referred to herein as a "proofing engine").

Therefore, a need presently exists in the art for a technique for inclusion in a DDCP system that can be used to model, not necessarily exactly, a wide range of special color(s) in a halftone color proof image through use of the available, illustratively four, different primary process colors (C,Y,M,K) and specifically halftone dots formed of these individual primary colors. Specifically, such a technique should significantly expand the range of special colors that can be modelled in a color proof image over that heretofore obtainable in the art, such as through electro-photographic technologies, as well as be compatible with digital marking engines.

### DISCLOSURE OF THE INVENTION

Accordingly, an object of the present invention is to provide a technique for use in a direct digital color proofing (DDCP) system that can model a special color, such as a fifth or sixth color, by using only primary colored, e.g. cyan, magenta, yellow, black (C,Y,M,K), halftone dots.

A specific object is to provide such a technique that can significantly expand the range of special colors that can be modelled over that previously possible in the art.

Another specific object is to provide such a technique that is not only compatible with digital marking engines but is also very easy and inexpensive to implement and use, particularly in a DDCP system.

These and other objects are advantageously accomplished in accordance with the teachings of our invention by varying the dot size of the halftone dots for each different primary color and particularly by varying the solid area density of these dots as well, and then, with these variations, writing these dots on an overlaid, e.g. dot-on-dot, basis.

We have found that since a human eye spatially integrates overlaid primary colored halftone dot patterns to perceive a resultant color therefor, variations in both solid area density and dot size will yield a significantly increased range, i.e. a much wider offering, of colors than that which would result by merely varying the solid area density of each overlaid dot. Accordingly, through our invention, halftone dots of independently, though appropriately, varying size and, particularly varying solid area density as well, are overlaid with accurate registration, on a dot-on-dot basis, to generate a color (hereinafter referred to as either a "modelling" or "recipe" color) that simulates each desired special color. The amount of variation in solid area density and dot size, the latter viewed as dot gain, from one primary color to the next is determined by the particular special color that is to be modelled in a proof image and the specific recipe color that is to be generated therefor.

In accordance with a preferred embodiment of our invention, each recipe color is formed according to claim 1. The apparatus according to claim 13 permits to obtain a specific recipe color which is formed by using a set of primary colored continuous tone (contone) separation data files that collectively form separation data for the corresponding special color in the image to be proofed. These data files provide the same type of primary colored contone separation data as would normally be used in printing the "non-special" colors in the proof image. However, to generate halftone dot patterns for each recipe color, two separate dot size and density look-up tables are used to appropriately adjust the size and solid area density of the contone separation data for the special color separation files and, by doing so,

appropriately vary the size and solid area density of the resulting primary colored halftone dots. A unique set of dot size and solid area density look-up tables exists for each special color that is to be modelled. Furthermore, this set contains separate dot size and density tables for each primary color that is to be used to generate each recipe color.

Specifically, the dot size table, which is addressed with each contone value from a contone separation data file imparts a pre-defined amount of dot gain to each of these values so as to properly vary the corresponding dot size therefor and thereby generate modified contone values. For a particular recipe color, this look-up table stores a separate pre-defined dot gain function for each primary color that is to be used to produce that recipe color. The resulting contone values produced by the dot size look-up table are then electronically screened, which includes appropriate processing through, for example, an electronic dot generator and font table to yield appropriate binary bit-mapped values that collectively define halftone dots. These binary values are then routed through a density look-up table. This latter table is accessed using each bit-mapped binary value to vary the exposure level of a laser used in the proofing engine to generate a writing spot therefor and hence vary the solid area density of each such resulting halftone dot. The dot size table preferably exists within a raster image processor (RIP) which accepts incoming contone files from any one of a variety of color electronic pre-press systems (CEPSs) and which performs data de-interleaving, screening, dot generation and other image data processing operations; while the density table is preferably situated in the proofing engine itself.

Through the use of separate dot size and density look-up tables for each primary color, the size and solid area density of each primary colored halftone dot can be independently varied in order to yield a rich offering of potential recipe colors. Furthermore, by transforming separation data using pre-stored values situated in look-up tables to yield each recipe color, the percentage contribution of each primary color in the resulting overlaid halftone dot structure and hence the resultant recipe color so formed can be readily changed by merely varying the contents of the look-up tables.

Our invention also possesses the feature, through use in a DDCP system, that any combination of primary colors can be successively printed in any desired lay-down order to yield colored halftone dots of corresponding dot size and solid area density which have been overlaid in that order. For example, if a recipe color only requires cyan and yellow dots, then only these two colors would be printed. In addition, rather than printing cyan halftone data first, yellow halftone data could be printed first with cyan being printed second, and so on for other color orders. By permitting any combination of the available primary colors to be used in any desired lay-down order, an increasingly broad offering of recipe colors can be readily and easily produced through use of our invention.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention may be readily understood by considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts the structure of composite halftone dot 100 formed in accordance with our inventive teachings for a given recipe color;

FIG. 2 depicts a simplified high level block diagram of our inventive method for forming recipe colors using overlaid halftone dots of varying dot size and solid area density;

FIG. 3 depicts a graph of ideal and typical versions of dot gain curves as known in the art;

FIG. 4 depicts graphs of dot gain functions for specifying the dot size of various primary color halftone dots that are to be overlaid in accordance with our inventive teachings to form a particular recipe color;

FIG. 5 depicts the correct alignment of the drawing sheets for FIGs. 5A and 5B;

FIGs. 5A and 5B collectively depict a high level block diagram of Direct Digital Color Proofing (DDCP) system 500 that utilizes our invention to generate recipe colors on a digital proof image;

FIG. 6A depicts the data structure of a proof request used in DDCP system 500 shown in FIGs. 5A and 5B;

FIG. 6B depicts the structure of image file description field 610 situated within proof request (queue element) 600 shown in FIG. 6;

FIG. 6C depicts image processing flags field 619 that forms part of image file description field 610 shown in FIG. 6A;

FIG. 6D depicts the structure of each one of pass parameters fields 680 situated within proof request 600 shown

in FIG. 6A;

FIG. 7 depicts a simplified high level block diagram of a process through which contone separation data is processed within processor 530 shown in FIGs. 5A and 5B to yield halftone image data for proofing engine 570 and specifically including the processing occurring within processor 530 for use in generating a recipe color in accordance with our invention;

FIG. 8 depicts a block diagram of those components of proofing engine 570 that are germane to our present invention;

FIG. 9 depicts a block diagram of illustrative density circuit 820<sub>1</sub> situated within proofing engine 570 shown in FIG. 8 and which specifically includes solid area halftone density conversion look-up table 940 for use in generating a recipe color in accordance with our inventive teachings;

FIG. 10 depicts recipe colors selection screen display 1000, that is generated at operator PC 520 situated within DDCP system 500 shown in FIGs. 5A and 5B, for use by an operator in listing those recipe colors for which definitional data is stored on raster image processor 510, creating a file of data for a new recipe color or selecting such a file for an existing recipe color that is to be modified; and

FIG. 11 depicts recipe color setup screen display 1100, that is generated at operator PC 520 shown in FIGs. 5A and 5B, for use by the operator in entering data for a new recipe color or editing a file for an existing and selected recipe color.

To facilitate understanding, identical reference numerals have been used, where possible, to denote identical elements that are common to various figures.

#### MODES OF CARRYING OUT THE INVENTION

After reading the following description, those skilled in the art will readily appreciate that the teachings of our invention can be applied to any of a wide variety of different types of color digital images, such as illustratively proof images or digital prints, as well as to either halftone or continuous tone (contone) imaging, to create a recipe color from a limited number of colorants used in printing any such image. Primarily speaking, our invention is directed to halftone imaging wherein a significantly expanded range of colors can be provided by dot-on-dot halftone printing of primary colored dots of appropriate size and density. However, our inventive teachings can also be used in contone printing to create recipe colors by overlaying primary contone colors of appropriately varied density values though without any size variation. Moreover, the teachings of our invention can be used not only with a cyan, yellow, magenta and black (C,Y,M,K) color gamut used in halftone printing but with many other color gamuts as well. For ease of explanation, our invention will now be described in the context of use within a direct digital color proofing system (DDCP) for creating a recipe color in a digital color proof image using the C,Y,M,K color gamut.

In accordance with our broad inventive teachings, we have found that a wide range of colors can be obtained in a color proof image by varying the dot size of the halftone dots for each different primary color and particularly, to further expand the range, by varying the solid area density of each of these dots as well and then, with these variations, accurately printing these dots on an overlaid dot-on-dot basis. By doing so, a large range of so-called "recipe" colors can be achieved in the proof to simulate "special" colors that can be printed using multi-color, e.g. five or six, color printing presses, but which are not situated within the C,Y,M,K color gamut. In particular, we have found that since a human eye spatially integrates overlaid primary colored halftone dot patterns to perceive a resultant color therefor, variations in both solid area density and dot size will yield a significantly increased range of recipe colors than that which can be produced by merely varying the solid area density of each overlaid dot.

Accordingly, through our invention, halftone dots of independently, though appropriately, varying dot size, particularly in conjunction with solid area density variations, are overlaid with accurate registration, on a dot-on-dot basis, to generate each recipe color. The amount of variation in solid area density and dot size, the latter viewed as dot gain, from one primary color to the next is determined by the specific recipe color that is to be generated in the proof image and that is to model (i.e. simulate) a corresponding special color in an original image being proofed. While the recipe color, based on C,Y,M,K colorants, will not exactly match a special color situated beyond the C,Y,M,K gamut, the resulting recipe color will nevertheless simulate the special color.

FIG. 1 depicts the structure of a composite halftone dot formed in accordance with our inventive teachings for a given recipe color. As shown, composite halftone dot 100, having a dot size of 100%, is formed by overlaid dot-on-dot printing, using separate toning passes, of primary colored component halftone dots 110, 120, 130 and 140 which have

different corresponding dot sizes and density levels. Dot 100 is shown grossly exaggerated in size for purposes of illustration. As an example, component dots 110, 120, 130 and 140 are respectively a cyan dot with approximately a 100% dot size and a 95% solid area density; a magenta dot with approximately an 80% dot size and a 90% solid area density; a yellow dot with approximately a 50% dot size and an 80% solid area density; and a black dot with approximately a 25% dot size and a 40% solid area density. Composite dot 100 is printed with a lay-down order of cyan dot 110 first, followed by magenta dot 120, then yellow dot 130 and finally black dot 140. While composite dot 100 and its component halftone dots are all illustratively diamond shaped, a wide variety of other dot fonts, such as for example round or oval shaped dots, can be used instead. Moreover, while composite dot 100 is shown as being composed of four primary colored component halftone dots, a different number of such component dots could also be used and in any desired order. Inasmuch as a DDCP system, such as system 500 shown in FIGs. 5A-5B and described below, also permits a colored media to be used, the color of the media itself can be used as an additional color component in forming a composite dot, though its solid area density and size would be fixed.

To achieve different recipe colors, the dot size as well as the solid area density of each component dot can be independently varied on a continuous basis, as desired, from 0-100%. These variations permit the contribution of each primary color to be adjusted proportionally over its entire tone reproduction range in order to achieve tints of the same color hue.

A simplified high level block diagram of our inventive method for forming recipe colors using overlaid halftone dots of varying dot size and solid area density is depicted in FIG. 2. Each recipe color is formed using a set of primary colored (C,Y,M,K) contone separation data files for that particular recipe color. For each primary color that is to be used in generating a recipe color, each successive value in the separation file for that primary color is effectively transformed through two successive look-up tables, specific to that primary color, to impart the needed variation in halftone dot size and solid area density to the resulting component halftone dots for that primary color. These look-up tables contain empirically determined data which, based upon the incoming contone separation values and desired recipe color, provide appropriate settings for dot gain and solid area density for each primary colored component halftone dot.

Specifically, incoming image data 205 for a given set of C,Y,M,K separation files for a special color is routed into processing and printing block 220 which, in turn, generates halftone bit-mapped data that when printed, on a dot-on-dot basis, forms illustrative composite halftone dot 250. Inasmuch as block 220 provides a number of image processing functions, such as inter alia translation of interleaved CEPS (color electronic pre-press systems) data files, de-interleaving of the CEPS data files into constituent C,Y,M,K separation files and electronic screening, and digital color image printing, that do not form part of our specific invention, all these functions have been omitted to simplify the drawing and facilitate reader understanding of our invention.

As shown, processing block 220 contains four dot gain look-up tables 230 (collectively formed of cyan dot gain table 232, magenta dot gain table 234, yellow dot gain table 236 and black dot gain table 238) and four solid area density look-up tables 240 (collectively formed of cyan density table 242, magenta density table 244, yellow density table 246 and black density table 248). Contone C,Y,M,K separation values are supplied to the input of the corresponding cyan, magenta, yellow and black dot gain tables. Each of these tables is loaded with a pre-defined dot gain function which imparts an appropriate variation, in terms of dot gain, to the dot size for the corresponding primary color. For example, if a cyan component halftone dot for a given recipe color required a dot gain of 10% for a 50% input dot, then, for this sized dot, table 232 would produce a contone value corresponding to a dot size of 60%, and so forth for other variations in dot size. The modified outputs of C,Y,M,K dot gain tables 232, 234, 236 and 238, after among other operations being electronically screened and thus converted into appropriate halftone dot patterns, are fed to respective C,Y,M,K density tables 242, 244, 246 and 248. Specifically, the value of each binary bit that is to form a halftone dot for a given primary color is applied as input to a corresponding density table. Based upon its value, the corresponding table generates either one of two pre-defined multi-bit values to set the exposure level of a laser used in the proofing engine so as to produce the corresponding writing spot with a proper level of darkness and hence vary the solid area density of each component halftone dot partially formed by these spots, such as the component dots which collectively form dot 250. The density can vary in a relative range of .2D to 2.0D. Changing density alone permits recipe colors of different hues to be produced.

To properly configure a DDCP system to generate a desired color proof image, the system, as discussed in detail below, relies on use of a proof request that contains various parameters that specify, among other items, screen ruling, screen angle, dot shape and recipe color(s) to be used to generate that image. Inasmuch as the system typically stores empirically based dot gain functions for a relatively large number of special colors, in symbolically tables 210, the system will load, as symbolized by dashed lines 215, tables 230 from table 210 with values for the dot gain functions needed for a corresponding recipe color, i.e. of the primary colors required therefor, immediately prior to processing contone values for an incoming proof request that employs that recipe color. As discussed below, the DDCP system provides an operator with the ability to add, change (such as by using different empirical data values) and delete any recipe color from the system which, in turn, will appropriately change the contents of table 210. In addition, the DDCP system stores as part of the specification for each recipe color, the solid area density correction value for each con-

stituent primary color. The DDCP system also loads the appropriate primary color density correction values into tables 240 immediately prior to printing a corresponding proof image. While these values are typically fixed for each primary color, appropriate empirically determined functions can be used instead with their values being stored into a table, similar to table 210, and subsequently loaded into tables 240, as needed.

As will be seen below, dot gain tables 230 exist within a raster image processor (RIP) in the DDCP system wherein the RIP accepts incoming contone files from any one of a variety of color electronic pre-press systems (CEPSs) and which performs data de-interleaving, screening, dot generation and other image data processing operations; while density tables 240 are situated in the proofing engine itself used in the DDCP system.

To understand dot gain and the contents of dot gain tables 230 which are used to form a given recipe color, consider FIGs. 3 and 4.

FIG. 3 depicts a graph of ideal and typical versions of dot gain curves for a single color as known in the art. Dot gain is a well known phenomena in halftone printing and refers to an apparent change in size of a printed halftone dot from its input size. This change typically results from the tendency of ink to spread after it has been deposited on paper as well as to various optical effects that make a dot appear larger than it actually is. Dot gain is typically measured in terms of dot area and can cause an increase (or decrease) in dot area for a given input dot area. Dot area is measured in terms of 0% to 100% with 100% indicating a desired maximum sized dot. For no dot gain as symbolized by dashed line 310, an input dot will produce, on a 1:1 basis, the same size output dot. However, due to dot gain, a relationship between dot input size and actual output dot size may not be linear and, in fact, often varies based on the input dot size as indicated by illustrative curve 320. Dot gain, being area 350, is viewed as the percentage change in area for an output dot relative to a given size input dot. For curves 310 and 320, the dot gain is given by region 350. Inasmuch as dot gain is typically specified for a given percentage input dot size, dot gain for a 20% input dot is shown by line 330 and for a 40% input dot by line 340.

Now, to generate a recipe color, the dot in/dot out relationship is intentionally changed to vary the dot size of the dots produced for each primary colored component halftone dot. As such, FIG. 4 depicts graphs of dot gain functions for varying the dot size of various primary color halftone dots that are to be overlaid to form a particular recipe color.

The particular recipe color utilizes overlaid cyan, yellow and magenta halftone dots with their dot gain functions being given by lines 420, 430 and 440. For purposes of ready comparison, an ideal 1:1 dot gain function is shown by dashed line 410. For each input dot size, i.e. each different contone value in each of these primary color separations for the corresponding special color, these dot gain curves specify the output dot size to use for each such primary color so that the resulting primary colored component halftone dots, once superimposed and printed on an accurate dot-on-dot basis with the appropriate solid area density levels, will produce the desired recipe color. For example, for equal sized 40% input dots for cyan, yellow and magenta ( $DI_C$ ,  $DI_Y$ ,  $DI_M$ ), the recipe color would be formed of approximately a 50% cyan output dot ( $DO_C$ ), a 65% yellow output dot ( $DO_Y$ ) and a 28% magenta output dot ( $DO_M$ ), and so on for other input dot size values regardless of whether these input values are equal or unequal for the individual primary colors. In defining each recipe color to the DDCP system, the digitized values of the full corresponding dot gain curve for each different primary color used to form that recipe color are provided to the system and then stored therein for subsequent use in loading each corresponding dot gain look-up table, when needed. Though dot gain functions normally start at 0% and terminate at 100%, there is no such requirement in generating dot gain functions for component halftone dots to be used in depicting a recipe color. These dot gain curves, as well as the accompanying solid area density correction values discussed above, are empirically determined using procedures well known in the art to yield an appropriate recipe color for each special color that is to be simulated in a color proof image.

With the above in mind, the remainder of the discussion will now address the specific manner through which our invention is implemented within an illustrative DDCP system. In this regard, FIGs. 5A and 5B collectively depict a block diagram of DDCP system 500 which utilizes our invention for printing recipe colors. The correct alignment of the drawing sheets for these figures is shown in FIG. 5. For the purposes of brevity, only those aspects of this DDCP system that are germane to a full understanding of the implementation and/or use of our invention will be specifically discussed hereinbelow.

As shown, DDCP system 500 is connected to and obtains contone image data, via lines 505 (containing lines 505<sub>1</sub>, 505<sub>2</sub>, ..., 505<sub>n</sub>), for an original image from any one of a number of color electronic pre-press systems (CEPSs) 503<sub>1</sub>, 503<sub>2</sub>, ..., 503<sub>n</sub> that collectively form CEPSs 503. In essence, DDCP system 500 processes the contone image data for each image and generates an accompanying color proof image therefor on, for example, a paper medium. The resulting proof image after being transferred to the paper medium is referred to as a "proof sheet". Contone image data can also be previously recorded on magnetic tape and, through magnetic tape drive 507, provided to DDCP system 500 for proofing.

The data provided by each CEPS is in the form of a file of successive contone values which, for each successive pixel within an image, are formed of interleaved contone values for the individual separation colors, e.g. values for cyan, yellow, magenta, and black (C,Y,M and K), therefor. A similarly interleaved separation file is provided for each special color that is to appear in the image. Each of CEPSs 503 can be any one of a number of current commercially



available color electronic pre-press systems.

In general, for any image to be proofed, DDCP system 500 digitally manipulates the contone separation values provided by any of the CEPSSs by first de-interleaving these values into individual contone separation files, then digitally generates a halftone separation file for each of the individual contone separations by, for example, inter alia, electronic screening and dot gain compensation, and then directly writes a composite color proof image for all these halftone separations using the proofing engine. This processing is the same for all the separation files, regardless of whether the particular file is for a special color or not. However, if the interleaved file is for a special color, then this processing also includes dot gain and solid area density transformation in accordance with the teachings of our present invention. A proof request, as discussed below, specifies the name of the particular recipe color that is to be used to simulate a corresponding special color.

DDCP system 500 contains raster image processor (RIP) 510; proofing engine (PE) 570; operator personal computer (PC) 520 and its associated peripherals: densitometer 524, remote diagnostic modem 525 and line printer 526; and laminator 580. Each of CEPSSs 503<sub>1</sub>, 503<sub>2</sub>, ..., 503<sub>n</sub> is connected within RIP 510 through an appropriate hardware interface 512<sub>1</sub>, 512<sub>2</sub>, ..., 512<sub>n</sub>, which collectively form interfaces 512, to CEPS bus 515 which, in turn, is connected to processor 530. This processor is a conventional microcomputer system. Hard disks 541 and 543 (also denoted as hard disks 1 and 2) are also connected to processor 530 and provide temporary storage of processed halftone image data generated by this processor. Each of these hard disks contains an image file, with both of these disks collectively operating on a "ping-pong" basis such that processor 530 writes halftone image data for the next image to be proofed into one of these disks, while it reads halftone image data for the current image being proofed from the other disk and applies that data to the proofing engine. The processor alternates the function of each of these disks between reading and writing as data for successive images to be proofed is applied to the DDCP system.

RIP 510 is connected to proofing engine 570 through serial message link 560 which carries status and error messages, commands and parameters between these units on a serial basis. Data interface 550, which is formed of sixteen-bit parallel (active high) image data bus 553 and image control bus 555, is used to transfer halftone image data in sixteen-bit parallel form (for transferring halftone data for sixteen successive pixels at a time) from the RIP to the proofing engine. The RIP pads, as necessary, each micro-raster of the image to a sixteen-bit word boundary and, prior to the transfer of data across data bus 553, notifies the proofing engine, via serial link 560, as to the number of halftone bytes existing on each line of the proof image. This number is a constant for each image. Image control bus 555 contains three separate lines (not specifically shown): data ready, data request and data acknowledge, which are collectively used by RIP 510 and proofing engine 570 to implement a simple interlocked handshake protocol to transfer each successive sixteen-bit data word between these components. In particular, to transfer a sixteen-bit data word, RIP 510 asserts a signal (active low) on the data ready line (the "data ready signal") to inform the proofing engine that data transfer is to begin. Thereafter, to obtain this data word, the proofing engine asserts a signal (active low) on the data request line (the "data request signal"). Once this assertion is detected by the RIP, the RIP places the sixteen-bit data word onto image data bus 553 and then asserts a signal (also active low) on the data acknowledge line (the "data acknowledge signal"). Once the proofing engine reads this data word, then, in response to the asserted data acknowledge signal, the engine de-asserts the data request signal. In response to this, the RIP de-asserts the data acknowledge signal thereby completing an interlocked handshake operation and the accompanying successful data transfer. On the rising edge of the data acknowledge signal, proofing engine 570 loads the incoming sixteen-bit data value into an internal holding first-in first-out (FIFO) circuit within a data interface module (see FIG. 8). These steps are then repeated in seriatim for each successive sixteen-bit data word that is to be transferred from RIP 510, shown in FIGs. 5A and 5B, to the proofing engine for the current proof image to be printed. After all the halftone data has been transferred for a given proof image, the RIP will de-assert the data ready line. For each proof that is to be printed, the RIP successively transfers to the proofing engine the complete bit-mapped halftone image data, as a succession of sixteen-bit words, for each separate halftone separation image that is to form the proof.

Operator PC 520, containing display and keyboard 521 and processor 522, is a conventional personal computer that is interfaced through serial links 533 and 537 to both RIP 510, specifically processor 530 therein, and proofing engine 570. This PC permits a DDCP operator to monitor and interrogate the status of as well as control both RIP 510 and proofing engine 570 and perform diagnostic and set-up operations thereon, as desired. Densitometer 524, under control of operator PC 520, is used to measure the density of various test patches generated by the proofing engine in order to calibrate its performance. Modem 525 provides a dial-up telephone link for use in remotely diagnosing any abnormalities that may occur within the DDCP system. Line printer 526 can be used by the DDCP operator to provide a local printout of desired information.

Proofing engine 570 is preferably a multi-laser sublimation dye transfer binary marking engine. In essence, to print a proof image by the marking engine, a receiver sheet (i.e. a film media with a transfer layer) of appropriate dimensions is automatically cut and wrapped onto a rotating drum (not shown) within the engine. Thereafter, to generate a particular C, Y, M or K separation, a respective C, Y, M or K dye donor sheet is first spooled off a supply reel within the engine and superimposed, in proper registration, onto the receiver sheet with an emulsion side of the donor sheet contacting the

receiver sheet. Thereafter, a bit-mapped image for an appropriate halftone separation is written by the proofing engine onto the donor sheet by selectively exposing that sheet, using a writing laser, at each location where a darkened writing spot is to appear. At each such location, the exposure causes a controlled amount of dye to migrate (transfer) from the donor sheet to the top of the transfer layer of the receiver sheet. For each darkened writing spot, the intensity of the light produced by the writing laser determines the amount of dye that transfers to the receiver sheet. Once this occurs, the donor sheet is removed from the receiver sheet. This process is then repeated using a differently colored donor sheet for each remaining separation. This entire toning process is then successively repeated for the bit-mapped images that form the separations for each special color and specifically to form primary colored component halftone dots that, after having been accurately overlaid on a dot-on-dot basis, will paint all the regions in the proof image with the corresponding recipe color. In addition, the proofing engine can accommodate differently colored receiver sheets. Furthermore, the marking engine can also accommodate two specially colored donor sheets and write accompanying separations thereon for transfer to a receiver sheet. These colored donor sheets and accompanying separations can be used to generate an exact shade of either of two special colors, such as "KODAK" yellow, or of special colors that are not within the color gamut defined by cyan, yellow, magenta and black, e.g. "Hot" pink, phosphorescent, pastels or gold colors. (KODAK is a registered trademark of the Eastman Kodak Company of Rochester, New York which is also the present assignee hereof.) For purposes of simplifying the ensuing discussion, we will assume that the proofing engine is writing only primary colored separation data. Once proofing engine 570 writes all the primary colored separations for a particular proof image, including those for the "non-special" and "recipe" colors, onto a receiver sheet, the engine ejects that sheet as intermediate sheet 575. At this point, the entire proof image is situated on the top of the transfer layer of the receiver sheet that forms the intermediate sheet. In order to transfer the proof image from the intermediate sheet to paper media, in order to form a so-called "proof sheet", the DDCP operator manually inserts intermediate sheet 575 along with a sheet of prelaminate material and a sheet of press stock into laminator 580. The laminator is not electrically connected to any of the components within DDCP system 500. Once the operator feeds these sheets into the laminator, it first prelaminates the press stock to the intermediate sheet and then laminates the transfer layer to the press stock. Once lamination is completed, a laminated page emerges from the laminator with the transfer layer containing the proof image fused to the press stock. The operator then peels off and discards intermediate layer 585, which is a backing layer, and then retains proof sheet 590 containing the proof image. For purposes of the present invention, any one of a number of different types of proofing engines could be used. Inasmuch as the laminator does not form part of the present invention, it will not be discussed in any further detail below.

In order to generate a proof image, an operator situated at any of CEPSs 503 formulates a proof request through a keyboard and interactive menu based screen displays provided thereat. The proof request, as defined below and shown in FIGs. 6A-6D, contains those parameter values and file name(s) that are necessary, when proofing resources are available, to set-up the DDCP system to generate a proof image. The parameter values define the manner through which the contone image data for the proof image is to be processed by the RIP, such as by defining screen rulings and angles, separation sequence, number of copies, recipe color(s) to use, and the like, and then printed by the proofing engine. The file name(s), which are defined by the CEPS operator, specify the names of the data file(s) that reside on the CEPS and contain the interleaved contone image data for that proof image. Note however, that the proof request does not however contain the image data itself but only an identification of the file(s) which stores that data. By eliminating image data from each proof request, the size of each proof request is substantially reduced from upwards of approximately 100 MBytes (for image containing both contone data and linework) to approximately 200 bytes.

After a proof request has been entered, the particular CEPS on which it is entered will transmit that request to DDCP system 500 and specifically to RIP 510. Proof requests can be entered either while the DDCP system is currently processing a prior proof request, printing a proof image or performing neither operation. RIP 510 maintains a proof request queue within one of the two hard disks, illustratively within hard disk 541. This queue contains three separate queues: a "rush" queue, a "normal" queue and a "hold" queue. Based upon the priority accorded to the request by the operator, i.e. rush, normal or hold, RIP 510 places the incoming request at the bottom of the appropriate queue. Those requests that have been assigned a rush priority are sequentially processed first, again on a first-in first-out basis, by the RIP and, in turn, forwarded to the proofing engine for printing ahead of any "normal" priority requests. A request with a "hold" priority is merely retained in the "hold" priority queue but is not processed until such time as its priority is changed or it is incorporated, by an operator, into a "scatter" proof request. A scatter proof is a proof that contains a number of non-overlapping images, here arising from separate proof requests, that are printed on a common proof sheet.

Through operator PC 520 and specifically through various interactive menu based screen displays generated thereat, the DDCP operator can edit the contents of each of the queues and each proof request therein. Because the image parameters that configure the proofing engine for any proof image form part of the request for that proof, the operator can change, as desired, the condition(s) under which any individual proof will be generated, e.g. by changing screen ruling, screen angle for any individual halftone separation and the particular recipe color(s), if any, that are to be used. In addition, the DDCP operator can also re-prioritize the proof requests, re-arrange the order in which the

proof images are successively generated, and even add or delete proof requests from each queue. Furthermore, as discussed in conjunction with FIGs. 10 and 11 below, the DDCP operator can also list those recipe colors for which definitional (i.e. set-up) data is stored on raster image processor 510, create a file of data for a new recipe color or select such a file for an existing recipe color that is to be modified and subsequently modify the recipe color definition stored in that file.

The RIP begins processing a particular proof request once that request reaches the top of its associated queue. To simplify matters for purposes of the ensuing discussion, the proof request queue will be assumed, on a simplistic basis, as containing only one queue. Specifically, after the most recently occurring request has been fully processed, the RIP reads the next proof request situated at the top of the queue. Once this request has been read, the RIP determines, based upon the parameter values specified in that request and current system resources, whether a proof image for that request can be currently printed or not. In this regard, for example, if the request specifies a particular media color, the RIP determines through querying proofing engine 570 whether media for that color has been loaded into the engine and whether sufficient supplies of that media exist to generate the proof. Similarly, if a special color donor sheet is specified, the RIP inquires as to whether that donor sheet is available, and so forth for other consumable items.

If the RIP determines that appropriate system resources exist to generate a proof image for this request, then the RIP obtains the appropriate contone data file(s) from the CEPS that generated this request. The appropriate file name(s) and an identification (device number) of this CEPS are specified within the proof request. For example, for a proof request generated from CEPS 503<sub>2</sub>, RIP 510, as shown in FIGs. 5A and 5B, sends an instruction containing the file name(s) specified in that request for the accompanying contone data to this CEPS. In response, the CEPS reads the file(s) and supplies the data over line 505<sub>2</sub> to RIP 510. This data will be routed through the appropriate interface circuitry, such as circuitry 512<sub>2</sub>, which provides an appropriate hardware interface for this CEPS to the RIP. The data is then routed, via CEPS bus 515, to processor 530 situated within RIP 510. The processor will first translate this data, if necessary through an appropriate translation routine, into a form compatible with RIP programming. This may include, for example, inverting density values where on a particular CEPS a "0" eight-bit contone value may indicate full density, while on the DDCP the same value would indicate no density. To provide compatibility across many different CEPSs, separate hardware interfaces and software translation routines, to the extent needed, will exist within the RIP for each different CEPS. As such, the DDCP can function with a wide variety of different CEPSs, and nearly any number of different CEPSs can be interfaced to CEPS bus 515. After the contone data has been appropriately translated, RIP 510 will electronically screen the data for each separation to generate a halftone separation for each different primary color. To generate each recipe color, this processing also includes transforming the contone separation values through the appropriate dot gain look-up table, as discussed above, in order to obtain the proper dot size for each component halftone dot that will be printed on a dot-on-dot basis to generate that recipe color. Thereafter, the RIP stores all the data for the halftone separations for the current image being processed, including that for the separations for each of the desired recipe color(s), in either hard disk 541 or 543. At the same time, the RIP is reading halftone image data for the image that has most recently been processed and is applying that data over data interface 550 to proofing engine 570 to generate a proof image therefor. To increase throughput, the RIP pipelines the image processing and printing functions. Specifically, while processed halftone image data is being read from one hard disk and printed, newly processed image data for the next image to be printed is being stored on the other hard disk. Under the control of RIP 510, each of the hard disks reverses its function with each successive image. Operating the hard disks in this fashion increases the throughput of proof images through the DDCP and allows the system to produce a relatively steady stream of images through the system at or near that of the proofing engine. Therefore, assuming that the RIP is currently reading halftone image data from hard disk 543 for printing, newly processed image data for the current image being processed will be stored on hard disk 541. Once all the data has been supplied from hard disk 543 to proofing engine 570 in order to print the most recently processed image, then, shortly thereafter, RIP 510 will read the halftone image data stored on hard disk 541 and supply it to the proofing engine for printing, with this process being repeated for successive images to be proofed. Inasmuch as the particular image processing, apart from dot gain transformation that occurs to the contone image data by RIP 510 does not form part of the present invention, this processing will not be discussed in any further detail below. For a detailed explanation of the queue based manner in which proof requests are processed through RIP 510, including the use of hard disks operating on a "ping-pong" basis, the reader is referred to the co-pending United States patent application entitled "A Queue Based Technique for Handling Proof Requests in a Direct Digital Color Proofing System" from applicants S. Auer et al, serial number 07/749,024; filed August 23, 1991 and which has been assigned to the present assignee hereof and which is incorporated by reference herein.

The proof requests that reach the top of either of the "rush" or "normal" priority queue but can not be processed by the RIP at the time they were read retain their place in their respective queue pending subsequent processing. Proof requests can also be entered by the DDCP operator through operator PC 520 and specifically using menu driven interactive screen displays and keyboard entry through display and keyboard 521.

FIG. 6A depicts the data structure of a typical proof request. This request is stored within the proof request queue

as proof request (queue element) 600. Request 600 contains a succession of fields, with their accompanying reference numbers, listed and described below in Table 1.

Table 1 -- Proof Request Fields

<u>Item</u>	<u>Description</u>
10 Pointer to next entry (605)	Pointer to next entry (proof request queue element -- PRQE) in a linked list, that forms a queue, (rush, normal or hold) which holds this proof request;
20 Input file description (610)	Data structure which specifies: characteristics of the particular contone data to use in generating a proof image; file, device and page names for this data; and various image processing flags to enable/disable corresponding imaging features;
35 Output color order (625)	String defining the order of cyan, magenta, yellow, black, one media "special" color and/or two additional "special" separation colors for use in up to five successive halftoning passes for a common proof image;

5	Screen ruling (630)	Floating point value between 65-200 lines/inch continuous (approximately 25.59 - 78.74 lines/cm) which specifies the screen ruling to use for all the separations;
10		
15	Dot font (635)	Byte specifying dot font, e.g. diamond, elliptical, square, round, gravure or composed;
20	Description (640)	Optional text for a data legend to be printed on the side of the proof image; (string);
25	Number of proof copies (645)	Integer value from 1-50 designating number of copies of a proof image to print (byte);
30		
35	Upper left hand corner x coordinate position (650)	Integer value (in mm) defining the x position of the upper left hand corner of an image to be proofed relative to the media sheet -- only required for use in a scatter proof request;
40		
45	Upper left hand corner y coordinate position (655)	Integer value (in mm) defining the y position of the upper left hand corner of an image to be proofed relative to the media sheet -- only required for use in a scatter proof request;
50		
55		

5	<b>Scatter proof enable (660)</b>	Boolean value specifying whether this proof request can be part of a scatter proof request. If this enable is not set, then the associated request will not be included in a scatter proof request regardless of whether the associated request has been given a "hold" priority;
10		
15		
20	<b>Priority (665)</b>	Byte specifying rush, normal or hold;
25	<b>Extra Separation Names (670)</b>	Strings (up to two) which specify the file names of up to two extra (additional) separations that are to be generated for the proof image;
30		
35	<b>Recipe Color Number (675)</b>	Strings (up to two) which specify the number of up to two recipe colors to be used in printing a proof image; and
40	<b>Pass parameters (680)</b>	Data structure specifying parameter values particular to each halftone printing (writing) pass that is to be undertaken by the proofing engine.
45		

50 As indicated in FIG. 6B, image file description field 610 is itself a data structure that, among other things, contains a succession of names and parameter values pertinent to the particular contone data to use in generating a proof image for this request. Specifically, the constituent fields in field 610 are listed, with their accompanying reference numbers, and described below in Table 2.

55

Table 2 -- Image File Description Fields

5	<u>Item</u>	<u>Description</u>
	CEPS Device Name	String that specifies the name of
10	(611)	the CEPS (or other device) on
		which the contone data file(s)
		reside;
15	Job Name	String that defines a job name for
	(612)	the current proof request. Fields
20		611 and 612 are automatically
		established for this proof request
		once the CEPS (or DDCP) operator
25		establishes a pathname at the CEPS
		(or the operator PC) for the
		contone file(s);
	Page Name	String which identifies the name of
30	(613)	the particular page in the artwork
		to be proofed through this
		request;
35	Image Name	String which identifies the name of
	(614)	the particular image in an artwork
40		to be proofed through this
		request;
	CT resolution	Integer value that specifies the
45	(615)	resolution of the contone image
		file(s) to be proofed through this

50

55

request;

**LW resolution**  
(616)

Integer value that specifies the resolution of the accompanying linework file(s) to be proofed through this request;

**Image Height**  
(617)

Integer value (in mm) that specifies image height;

**Image Width**  
(618)

Integer value (in mm) that specifies image width; and

**Image Feature Flags**  
(619)

Byte containing various boolean flags to control various image processing and printing functions.

Image feature flags 619, as specifically shown in FIG. 6C, contain separate boolean fields for the functions of, inter alia: image scaling, rotation, mirror orientation, control strip enable and data legend enable. Specifically, the scaling ("Scale to Fit") flag, if set, permits the RIP to scale the size of the image, if needed, to fit the dimensions of a proof image area that has been defined on the media on which the proof will be generated. Similarly, the rotation ("Rotate Image") flag, if set, permits the RIP to rotate the image by 90°, if needed, to fit the proof image area. The mirror ("Mirror Image") flag instructs the proofing engine, through the RIP, to change the orientation of the image, in a fast scan direction, based on whether the contone data was stored in a so-called "mirrored" format by a CEPS which generated this request. The control strip enable flag, if set, instructs the RIP to print a control strip on the edge of the proofed image as it is being printed. The control strip consists of a series of single color test patches for use in subsequent densitometric measurements of the proofing process. Lastly, the data legend enable flag, if set, instructs the RIP to print a data legend, as specified in description field 640 shown in FIG. 6A, on the edge of the proofed image as it is being printed.

As indicated in FIG. 6D, pass parameters field 680 is itself a data structure that is replicated up to five times and contains parameter values pertinent for each successive halftoning pass that is to be performed by the proofing engine to generate a proof image for the associated request. Inasmuch as four separate passes can occur for the four different primary colored donor sheet colors and a separate pass can occur for a special colored media sheet, five separate halftoning passes to generate the "non-special" colors can be specified in a proof request. Similarly, this toning process can be repeated to separately tone each of the desired primary colors on a proof image so as to produce composite dots, such as illustratively dot 100 shown in FIG. 1, that will depict each recipe color. Although the proofing engine can accommodate a different specially colored media as well as a normal media, only one such media can be used to generate any one proof image. The order of these passes, for the "non-special" colors, is that specified in output color order field 625 shown in FIG. 6A. Therefore, the first occurrence of field 680 is for the first halftoning pass specified in output order field 625, the second occurrence of field 680 is for the next successive halftoning pass and so on for each of the remaining passes. Specifically, the constituent fields that form each one of pass parameter fields 680 are listed, with their accompanying reference numbers, and described below in Table 3.



Table 3 --

Pass Parameters Fileds	
Item	Description
Screen angle (681)	Floating point value between $\pm 180^\circ$ continuous specifying the screen angle for a corresponding pass;
Dot gain table (683)	String which identifies a dot gain table to use in this pass; and
Solid area density (685)	A signed byte between the values $\pm 22$ for a halftoning pass for a donor sheet color, or between $\pm 99$ for halftoning pass for a special media color.

As discussed above, for any image being proofed, a separate set of C,Y,M and/or K separations of that image but only for a given special color, is used to print each corresponding recipe color. For these particular separations, the specific dot gain table and solid area density information that would ordinarily occupy pass parameters field 680 is instead read from a corresponding recipe special color definition file, which is discussed in detail below in conjunction with FIG. 11. This file specifies the lay-down order of the primary colored component halftone dots as well as the corresponding solid area density correction values therefor.

FIG. 7 depicts a simplified high level block diagram of the process through which contone separation data is processed within processor 530 shown in FIGs. 5A and 5B to yield halftone image data for proofing engine 570 and specifically including the dot gain processing that occurs within RIP processor 530 for use in generating recipe colors in accordance with our invention. To simplify the following discussion, only the contone separation data for those separations used in generating a recipe color will be specifically discussed.

To facilitate the explanation of FIG. 7, assume for the moment that a proof request has reached the top of either the "rush" or "normal" queue and is now being processed to produce bit-mapped composite halftone dots for the first recipe color listed therein. As such, proof request queue handler and hard disk input/output (I/O) routines 740 will have sent, through lines not shown, an instruction to a particular CEPS specified in this request to obtain corresponding interleaved separation data therefor. In response to this instruction and through an appropriate interface (any one of interfaces 512 shown in FIGs. 5A and 5B), the interleaved CEPS data appears on line 517 shown in FIG. 7. Within RIP processor 530, this data is first translated and de-interleaved into different contone separation files by translation and de-interleaving process 710. In addition, the current proof request will have been applied, as symbolized by line 745, to proof request analysis process 750. This process, inter alia, accessed the accompanying definitional file for the recipe color delineated in that request. Based upon the order of the separations specified in this file for this recipe color and the names of the specific dot gain functions to be used therefor, process 750 selects, as symbolized by line 753, the particular dot gain look-up table from those residing within tables 720 for use in processing the incoming contone values provided by process 710 for each incoming separation for this first recipe color. Accordingly, each contone value in that separation file is then applied as input to this particular look-up table within tables 720 in order to impart the necessary amount of dot gain (either an increase or a decrease) to that value. Prior to processing the contone values for an incoming proof request, RIP processor 530 loads into tables 720 all the values for all the dot gain functions that are to be used in generating all the recipe colors listed in that request. Each resulting contone value produced by tables 720 is then applied to screening process 730 which converts the contone value into an appropriate bit-mapped component halftone dot therefor. Process 730 can be simplistically viewed as containing electronic dot generation process 733, which generates appropriate bit-mapped values, followed by dot font look-up table 736 which, based upon these values, supplies a particularly sized halftone dot pattern in a selected dot font. The particular font to use (e.g. diamond, elliptical, square, round, gravure or composed) is selected by proof request analysis process 750 based upon the value of the byte contained within "Dot Font" field 635 (see FIG. 6A) contained in the current proof request. The resulting halftone bit-mapped image data is then applied, as shown in FIG. 7, to proof request queue handler and hard disk I/O routines 740 for storage on that one of two hard disks 541 or 543 which is currently writing information for the current proof request. As noted above, the other hard disk is reading bit-mapped image data through process 740 for application, via image data bus 553, to proofing engine 570 for printing. This same processing is repeated in serialtim to generate an appropriate bit-mapped component halftone dot pattern for each of the other separation files for the first recipe color and is then successively repeated using the contone separation files, along with different corresponding dot gain look-up tables, to yield all the bit-mapped component halftone dot patterns for the second recipe color (assuming one is listed) in the current proof request.

Optional terminal 725, which is shown in dashed lines, can be connected directly to RIP and used by an operator to create or delete any of the dot gain functions stored within tables 720 or modify any of the specific values therefor. As noted above, these same functions can also be accommodated through operator PC 520 (see FIGs. 5A and 5B).

FIG. 8 depicts a block diagram of those components of proofing engine 570 that are germane to our present invention and specifically which provide solid area density correction in accordance with the teachings of our invention.

As shown, proofing engine 570 contains data interface module 810; density circuits 820<sub>1</sub>, 820<sub>2</sub>, ..., 820<sub>k</sub> collectively forming density circuits 820; laser drivers 830<sub>1</sub>, 830<sub>2</sub>, ..., 830<sub>k</sub> collectively forming laser drivers 830; laser diodes 840<sub>1</sub>, 840<sub>2</sub>, ..., 840<sub>k</sub> collectively forming laser diodes 840; and control circuitry 850. Bit-mapped image data appearing on image data bus 553 is routed, via data interface module 810, to density circuits 820. The output of data interface module 810 is applied through data bus 815 to density circuits 820<sub>1</sub>, 820<sub>2</sub>, ..., 820<sub>k</sub> which, in turn, route their corresponding outputs, via lines 825<sub>1</sub>, 825<sub>2</sub>, ..., 825<sub>k</sub>, to laser drivers 830<sub>1</sub>, 830<sub>2</sub>, ..., 830<sub>k</sub>. These drivers each contain appropriate analog-to-digital converters and associated drive circuitry to convert the digital exposure levels applied thereto and appropriately energize lasers 840<sub>1</sub>, 840<sub>2</sub>, ..., 840<sub>k</sub>, via leads 835<sub>1</sub>, 835<sub>2</sub>, ..., 835<sub>k</sub>, to properly expose a corresponding separation pattern on each sublimation dye transfer donor sheet for a proof image.

The data appearing on image data bus 553 can either be sixteen successive halftone bits or two successive eight bit contone values. In the case of halftone data, the sixteen halftone bits, for any one separation, represent the state of sixteen successive pixels (writing spots) that are situated along a micro-raster for that separation in the proof image. Each density circuit operates on and writes a particular pattern, be it halftone or contone, for an eight-bit byte of the incoming sixteen bit data. As such, data interface module 810 appropriately de-multiplexes each sixteen-bit data word appearing on image data bus 553 into two eight-bit bytes. The high order eight-bit byte is applied to one density circuit, such as circuit 820<sub>1</sub>; while the low order byte is applied to the next density circuit, such as circuit 820<sub>2</sub>. Successive sixteen-bit data words are de-multiplexed and applied by the data interface module to successive corresponding pairs of density circuits in a round-robin fashion. In response to each incoming eight-bit value applied to a density circuit, that circuit appropriately sets the exposure of its associated laser diode. The laser diode will then write an appropriate halftone or contone pattern on the proof. If the incoming data to a density circuit is eight-bit halftone data, then that density circuit successively generates, through its associated laser diode, eight successive and corresponding writing spots at appropriate exposure levels to represent the "on" and "off" states thereof. Exposure levels are set to a twelve bit resolution with each halftone bit specifying either one of two of these levels. The density circuit uses a density look-up table, as discussed above and specifically shown in FIG. 9, to appropriately set each of these levels to yield the proper solid area density therefor. Alternatively, if an eight-bit contone value is to be written, then the density circuit sets the proper twelve bit exposure level of the associated laser diode to one of 256 values and then appropriately energizes the laser to write this value. Here too, the density circuit uses the look-up density table, with appropriate stored values, to transform the exposure level for the eight-bit contone value to yield the proper solid area density on the proof image for this contone value.

Control circuitry 850, which is connected to both image control bus 555 and serial message link 560, regulates, among other things, the amount of data that is transferred over image data bus 553 to interface module 810 based on marking speed of the proofing engine and controls the operation of each of the density circuits and each of the laser drivers.

FIG. 9 depicts a block diagram of illustrative density circuit 820<sub>1</sub> situated within proofing engine 570 shown in FIG. 8 and which specifically includes solid area halftone density conversion look-up table 940 for generating recipe colors in accordance with our inventive teachings.

As shown, density circuit 820<sub>1</sub> contains FIFO 910, shift register 920, switch 925, density look-up table 940 and control circuitry 950. Each incoming eight-bit byte applied from the data interface module and appearing over leads 815 is routed to FIFO 910. This FIFO is implemented using a random access memory (RAM) buffer and latches the incoming value. If the incoming byte represents an eight-bit contone value, then this byte is applied, via switch 925, directly to the address input of look-up table 940. This eight-bit value accesses a stored twelve-bit value from the look-up table, which, in turn, is applied as the appropriate exposure level, via leads 825<sub>1</sub>, to laser driver 830<sub>1</sub>. This look-up table has been previously loaded, as described above, with proper solid area density values to properly adjust the solid area density for each contone value.

Alternatively, if the incoming eight-bit byte appearing on lines 815<sub>1</sub> represents halftone data, then switch 925 is opened with the value of this byte being loaded in parallel into shift register 920. Thereafter, this shift register is operated to successively shift its contents one bit to the right and apply the value of the least significant bit in the register, via leads 930, as a one-bit address input to density look-up table 940. In the event this one-bit value is zero, then this indicates an even address input value with table 940 generating a pre-defined twelve-bit exposure value that is associated with the "off" state for a corresponding writing spot. Alternatively, if this one-bit value is one, then this indicates an odd address input with table 940 generating a pre-defined twelve-bit exposure value that is associated with the "on" state for a corresponding writing spot. Hence, in response to each eight-bit halftone data byte applied to density circuit 820<sub>1</sub>, this circuit will produce the desired exposure level of the corresponding "on" or "off" state for each of eight successive writing spots. Control circuitry 950, which is connected, via lead 860, to control circuitry 850 (see FIG. 8) in the proofing engine and, via leads 952, 954 and 956, as shown in FIG. 9, to FIFO 910 and density look-up table 940 provides overall control of density circuit 820<sub>1</sub> and individual control of all the components situated therein. In addition,

the control circuitry also generates, as needed, a pre-defined twelve-bit exposure level on leads 958 for use in calibrating the laser diode connected to laser driver 830<sub>1</sub>. In addition, look-up table 940 is preferably implemented using a dual ported RAM which is loaded with pre-defined twelve-bit values, via port P<sub>1</sub>, through control circuitry 950 and which supplies output values through port P<sub>2</sub>.

FIG. 10 depicts recipe colors selection screen display 1000, that is generated at operator PC 520 situated within DDCP system 500 shown in FIGs. 5A and 5B. Through this screen display, the DDCP operator can list those recipe colors for which definitional (i.e. set-up) data is stored on raster image processor 510, create a file of data for a new recipe color and/or select such a file for an existing recipe color that is to be modified. The DDCP operator accesses this screen through an interactive screen displayed menu driven user interface provided through operator PC 520 (see FIGs. 5A and 5B). Inasmuch as the specific software for generating screen displays 1000 and 1100 (the latter being shown in FIG. 11) and the interaction of this software with processor 530 within RIP 510 (see FIGs. 5A and 5B) to implement the functions specified through these displays would all be readily apparent to those skilled in the art, the software will not be discussed in any detail.

Once screen display 1000 appears on display and keyboard 521, this display, as shown in FIG. 10, presents a list to the operator of all the available recipe colors that have been previously defined, i.e. "set-up", and are currently stored within RIP 510. Through this list, the operator can select any recipe color to edit. Creation of a new recipe color entails copying the definition for an existing recipe color, then editing its contents as needed and finally saving the edited definition with a new recipe color name. Various user functions that can be used with this screen display are implemented using program defined "soft" function keys. Specifically, the "Enter" function provides the function of actually entering operator responses into the screen. The "Delete" function, when invoked, prompts the operator for a name and number of a recipe color to be deleted and, once this information has been entered, thereafter prompts the operator to verify a delete operation. Once verification is provided, the "Delete" function merely deletes the definition for the chosen recipe color from the DDCP system. The "Rename" function permits an operator to rename any selected recipe color in the displayed list under a different name. The "Copy" function, when invoked, creates a duplicate of a selected recipe color definition under a new name supplied by the DDCP operator. Lastly, through the "Prev" and "Next" functions, the DDCP operator can scroll between and display previous and next successive screens of listed recipe colors, where the number of such colors exceeds those which can be displayed on a single display screen.

Once a recipe color has been selected or an existing definition has been copied as a definition for a new recipe color, then operator PC 520 will cause Recipe Colors Setup Screen Display 1100 to appear for that particular recipe color on display and keyboard 521 shown in FIG. 5. Through this screen, the DDCP operator can appropriately edit the parameters that define this recipe color.

Specifically, as shown in FIG. 11, the definitional, i.e. "set-up", information for a recipe color includes the screen ruling, the specific primary process colors (C,Y,M and/or K) to use, the lay-down order of these colors, the solid area density (in relative terms) for each of these primary colors and the specific dot gain table (function) to use for each of these colors. For example, for the recipe color named "Pink 45" (abbreviated as "Pnk45") shown in FIG. 11, this color is produced through a recipe calling for a recommended screen ruling of 4.8 with cyan, yellow, magenta and black component halftone dots being laid down in that order with corresponding solid area densities of +3, -1, 0 and +12 and pre-defined dot gain tables having the names "Number 9", "Number 6", "MagDotG", and "StdBP", respectively, to appropriately size the component halftone dots. The recommended screen ruling is provided for informational purposes and can be filled in by the individual who establishes the definition for the recipe color. In fact, separate definitions can be established and saved under appropriate names with the DDCP system for the same recipe color but with different screen rulings, if desired. Through the "Save" function, the DDCP operator can save a recipe color definition under its current filename. Through the "Select" function, the operator can select the component primary color to that is to be edited or moved up or down the list so as to change the lay-down order. The "Move" function permits the DDCP operator to move a component primary color to a different position in the displayed lay-down order. The "Edit" function, when invoked, permits the DDCP operator to change any parameter value for a selected primary color. Lastly, the "Quit" function causes the operator PC to exit the procedure that generated screen display 1100 and move to a higher level display screen.

Although, for purposes of flexibility and simplification, separate dot gain and density tables are used for each different primary color that is to be used in conjunction with each recipe color, these tables could be combined, in some fashion, for each such color, if desired. Furthermore, although separate look-up tables are also used to store each different dot gain function for each different primary color to generate each recipe color, these tables could also be combined in a common memory with appropriate addressing used to select the appropriate entries.

In addition, although we have discussed our invention in terms of using accurate dot-on-dot placement of component halftone dots of varying size and solid area density to yield a composite dot, these component halftone dots could also be skewed (i.e. not concentrically aligned) with respect to each other, by pre-defined positional offsets, to yield a corresponding composite dot. Use of such a variable offset will provide an additional degree of freedom that, when integrated by the human eye in conjunction with changing dot size and solid area density, may further expand the range

of available recipe colors that could be produced by merely changing the dot size and solid area density of primary colored component halftone dots. Inasmuch as the varying positional offsets may give rise to objectionable Moire or other visually apparent periodic patterns in the proof, a small amount of random or pseudo-random noise may need to be injected into the positional addresses of each of these offsets, and for each component dot, to eliminate these patterns. Further along these lines, pre-defined look-up tables of positional offsets could also be included to appropriately locate the placement of each component dot in a composite dot given the desired recipe color to be obtained thereby. In this instance, a specific offset table could be used for each specific recipe color that is desired. Alternatively, such a table could merely specify the range of recipe colors that could be achieved through positional offsetting of each individual component dot with interpolation being used to calculate the appropriate positional offset value of each such dot needed to yield an intermediate recipe color.

Although one embodiment of the present invention has been shown and described in detail herein, many other embodiments that incorporate the teachings of our invention may be easily constructed by those skilled in the art.

#### INDUSTRIAL APPLICABILITY AND ADVANTAGES

The present invention is useful in direct digital color proofing (DDCP) systems and particularly in such a system for modelling a desired color(s) that can be obtained through use of a multi-color, e.g. five or six color, printing press but is not reproducible within a color gamut associated with a primary colored, e.g. C,Y,M,K, halftone proof image. Through use of this invention, a color proof image can be fabricated to depict a much wider range of colors which will simulate a color halftone image that will be produced by such a multi-color press than has been heretofore be achievable in the art.

#### **Claims**

1. A method of generating a desired color in an output image from a plurality of different colorants, said output image being a halftone depiction of a continuous tone input image, the method comprising the steps of:

obtaining data representing a plurality of primary colored continuous tone separations of said input image, each of said separations having incoming continuous tone values wherein corresponding ones of said incoming continuous tone values for all of said separations collectively define a region in the output image that is to contain the desired color;

generating, in response to each one of the incoming continuous tone values in each of said separations, data defining a halftone multiple dot (100) wherein size and solid area density of the multiple dot are pre-defined functions of the one incoming continuous tone value and a separation color associated therewith so as to form a plurality of primary coloured component halftone dots (110, 120, 130, 140);

printing, in said output image, spatially corresponding ones of said primary coloured component halftone dots, each from a different corresponding one of said separations and with a corresponding one of said colorants, on a dot-on-dot basis in a pre-defined order and with a pre-defined registration thereamong so as to form composite halftone multiple dots which collectively depict said desired color.

2. The method in claim 1 wherein said generating step comprises the steps of:

modifying the incoming continuous tone values contained in each one of the separations in accordance with a pre-defined dot gain (232, 234, 236, 238) relationship in order to yield corresponding modified continuous tone values, wherein said modified continuous tone values contain a pre-determined variation in dot gain with respect to corresponding ones of said incoming continuous tone values; and

converting each of said modified continuous tone values for each one of said separations into a halftone dot having a pre-defined solid area density value so as to form said primary coloured component halftone dots for said one separation, wherein said solid area density value is a predefined function of a separation color associated therewith.

3. The method in claim 2 wherein the printing step comprises the step of overlaying a spatially corresponding one of said primary coloured component halftone dots from each of said separations on a concentric basis in order to form a corresponding one of the composite halftone multiple dots.

4. The method in claim 3 wherein each of said colorants is a different primary color.

5. The method in claim 4 wherein said different colorants are cyan, magenta and yellow and black colorants.
6. The method in claim 3 wherein said incoming continuous tone values modifying step comprises the step of applying each of said incoming continuous tone values for said one separation through a first look-up table in order to produce corresponding ones of said modified continuous tone values, said look-up table containing stored values that collectively define a pre-defined dot gain function for the separation color associated with said one separation.
7. The method in claim 6 wherein said first look-up table comprises a plurality of separate dot gain look-up tables, wherein each one of the plurality of dot gain look-up tables stores a pre-defined dot gain function for a different separation color; and wherein said incoming continuous tone values applying step comprises the step of routing each one of the incoming continuous tone values for said one separation through the dot gain look-up table associated therewith.
8. The method in claim 7 wherein said applying step further comprises the step of reading, prior to modifying any of said incoming continuous tone values, each of said dot gain look-up tables from a memory so as to form said first look-up table.
9. The method in claim 3 wherein said modified continuous tone values converting step comprises the step of varying intensity levels of a writer used to print each of said primary coloured component halftone dots associated with said one separation in accordance with a pre-defined solid area density relationship, wherein the pre-defined solid area density relationship characterizes an exposure level for each writing spot that is to form said component halftone multiple dot based on whether said each writing spot is to be darkened or not and the separation color associated therewith.
10. The method in claim 9 wherein said varying step comprises the step of applying each bit-mapped value for each of said primary coloured component halftone dots through a second look-up table in order to produce corresponding ones of the intensity levels, said second look-up table containing stored values for the predefined solid area density relationship for the separation color associated with said one separation.
11. The method in claim 10 wherein said second look-up table comprises a plurality of separate solid area density look-up tables wherein each of the plurality of solid area density look-up tables stores a pre-defined solid area density relationship for a different separation color; and wherein the bit-mapped values applying step comprises the step of routing each one of the bit-mapped values for said one separation through the solid area density look-up table associated therewith.
12. Use of the method as defined in any of the preceding claims in a direct digital color proofing system for generating a color halftone proof image from in-coming digitized prepress continuous tone data for an input image, said system having means for processing the incoming prepress continuous tone data to yield screened primary colored halftone separation data representing halftone separations that are to collectively form the proof image, a marking engine for writing each of said halftone separations with proper registration so as to form said proof image, and control means connected to said processing means and said marking engine.
13. Apparatus for generating a desired color in an output image from a plurality of different colorants, said output image being a halftone depiction of a continuous tone input image, the apparatus comprising:
  - means for obtaining data representing a plurality of primary colored continuous tone separations of said input image, each of said separations having incoming continuous tone values wherein corresponding ones of said incoming continuous tone values for all of said separations collectively define a region in the output image that is to contain the desired color;
  - means for generating, in response to each one of the incoming continuous tone values in each of said separations, data defining a halftone multiple dot (100) wherein size and solid area density of the multiple dot are pre-defined functions of the one incoming continuous tone value and a separation color associated therewith so as to form a plurality of primary coloured component halftone dots (110, 120, 130, 140);
  - means for printing, in said output image, spatially corresponding ones of said primary coloured component halftone dots, each from a different corresponding one of said separations and with a corresponding one of said colorants, on a dot-on-dot basis in a pre-defined order and with a pre-defined registration thereamong so as to form composite halftone multiple dot which collectively depict said desired color.

14. The apparatus in claim 13 wherein said generating means comprises:

means (232, 234, 236, 238) for modifying the incoming continuous tone values contained in each one of the separations in accordance with a pre-defined dot gain relationship in order to yield corresponding modified continuous tone values, wherein said modified continuous tone values contain a predetermined variation in dot gain with respect to corresponding ones of said incoming continuous tone values; and means for converting each of said modified continuous tone values for each one of said separations into a halftone dot having a pre-defined solid area density value so as to form said primary coloured component halftone dots for said one separation, wherein said solid area density value is a pre-defined function of a separation color associated therewith.

15. The apparatus in claim 14 wherein the printing means overlays a spatially corresponding one of said primary coloured component halftone dots from each of said separations on a concentric basis in order to form a corresponding one of the composite halftone multiple dots.

16. The apparatus in claim 15 wherein each of said colorants is a different primary color.

17. The apparatus in claim 16 wherein said different colorants are cyan, magenta and yellow and black colorants.

18. The apparatus in claim 15 wherein said incoming continuous tone values modifying means comprises:

a first look-up table (232, 234, 236, 238) containing stored values that collectively define a pre-defined dot gain function for the separation color associated with said one separation; and means for applying each of said incoming continuous tone values for said one separation through the first look-up table in order to produce corresponding ones of said modified continuous tone values.

19. The apparatus in claim 18 wherein said first look-up table comprises a plurality of separate dot gain look-up tables, wherein each one of the plurality of dot gain look-up tables stores a pre-defined dot gain function for a different separation color; and wherein said incoming continuous tone values applying means comprises means for routing each one of the incoming continuous tone values for said one separation through the dot gain look-up table associated therewith.

20. The apparatus in claim 15 wherein said modified continuous tone values converting means comprises means (240) for varying intensity levels of a writer used to print each of said primary coloured component halftone dots associated with said one separation in accordance with a pre-defined solid area density relationship, wherein the pre-defined solid area density relationship characterizes an exposure level for each writing spot that is to form said component halftone multiple dot based on whether said each writing spot is to be darkened or not and the separation color associated therewith.

21. The apparatus in claim 20 wherein said varying means comprises:

a second look-up table (242, 244, 246, 248) containing stored values for the pre-defined solid area density relationship for the separation color associated with said one separation; and means for applying each bit-mapped value for each of said primary coloured component halftone dots through the second look-up table in order to produce corresponding ones of the intensity levels.

22. The apparatus in claim 21 wherein said second look-up table comprises a plurality of separate solid area density look-up tables wherein each of the plurality of solid area density look-up tables stores a pre-defined solid area density relationship for a different separation color; and wherein the bit-mapped values applying means comprises means for routing each one of the bit-mapped values for said one separation through the solid area density look-up table associated therewith.

23. A direct digital color proofing system for generating a color halftone proof image from incoming digitized pre-press continuous tone data for an input image, said system having means for processing the incoming pre-press continuous tone data to yield screened primary colored halftone separation data representing halftone separations that are to collectively form the proof image, a marking engine for writing each of said halftone separations with proper registration so as to form said proof image, and control means connected to said processing means and said marking engine, wherein said system comprises an apparatus as defined in any of claims 13 to 22.

24. The system as defined in claim 23 when appendant to claim 15 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.

25. The system as defined in claim 23 when appendant to claim 19 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.

26. The system in claim 23 when appendant to claim 22 wherein the marking engine is a sublimation dye transfer laser printer and said colorants comprise cyan, magenta, yellow and black colored donor sheets.

# Patentansprüche

1. Verfahren zum Erzeugen einer gewünschten Farbe in einem Ausgabebild aus einer Vielzahl von unterschiedlichen Farbstoffen, wobei das Ausgabebild eine Rasterabbildung eines Halbton-Eingangsbildes darstellt und das Verfahren folgende Schritte umfaßt:

- Erzeugen von Daten, die eine Vielzahl von Halbton-Auszügen des Eingangsbildes in den Grundfarben darstellen, wobei jeder der Auszüge ankommende Halbtonwerte aufweist und entsprechende Werte für alle Auszüge zusammen einen Bereich im Ausgabebild definieren, das die gewünschte Farbe enthalten soll;
- Erzeugen von einen mehrfarbigen Rasterpunkt (100) definierenden Daten in Abhängigkeit von jedem ankommenden Halbtonwert in jedem der Auszüge, wobei die Größe und Flächendichte des mehrfarbigen Rasterpunktes vorbestimmte Funktionen des eingehenden Halbtonwerts und einer diesem zugeordneten Auszugsfarbe, so daß mehrere Rasterteilpunkte (110, 120, 130, 140) in den Grundfarben gebildet werden; und
- Drucken räumlich entsprechender Grundfarben-Rasterteilpunkte im Ausgabebild, jeder von einem unterschiedlichen, entsprechenden Farbauszug mit einem entsprechenden Farbstoff, auf einer Punkt-für-Punkt-Basis in vorbestimmter Reihenfolge und Ausrichtung, so daß zusammengesetzte, mehrfarbige Rasterpunkte entstehen, die zusammen die gewünschte Farbe wiedergeben.

2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß der Schritt zum Erzeugen von Daten folgende Schritte umfaßt:

- Modifizieren des in jedem Farbauszug enthaltenen, eingehenden Halbtonwerts gemäß einer vorbestimmten Punktverstärkung (232, 234, 236, 238), um entsprechende, modifizierte Halbtonwerte zu erzeugen, die gegenüber entsprechenden Werten der eingehenden Halbtonwerte eine vorgegebene Variation in der Punktverstärkung aufweisen; und
- Umwandeln jedes modifizierten Halbtonwerts für jeden Farbauszug in einen Rasterpunkt mit einem vorbestimmten Flächendichtewert, um die Grundfarben-Rasterteilpunkte für den einen Farbauszug zu erzeugen, wobei der Flächendichtewert eine vorbestimmte Funktion einer diesem zugeordneten Auszugsfarbe darstellt.

3. Verfahren nach Anspruch 2, dadurch gekennzeichnet, daß der Schritt zum Drucken folgenden Schritt umfaßt:

- Überlagern eines räumlich entsprechenden Grundfarben-Rasterteilpunktes aus jedem der Auszüge auf konzentrischer Grundlage, um einen den zusammengesetzten, mehrfarbigen Rasterpunkten entsprechenden Punkt zu erzeugen.

4. Verfahren nach Anspruch 3, dadurch gekennzeichnet, daß jeder der Farbstoffe eine unterschiedliche Grundfarbe ist.

5. Verfahren nach Anspruch 4, dadurch gekennzeichnet, daß die unterschiedlichen Farbstoffe die Farben Blau, Rot, Gelb und Schwarz darstellen.

6. Verfahren nach Anspruch 3, dadurch gekennzeichnet, daß der Schritt zum Modifizieren der eingehenden Halbtonwerte folgenden Schritt umfaßt:

- Anwenden jedes der eingehenden Halbtonwerte auf den einen Farbauszug über eine erste Suchtabelle, um

den modifizierten Halbtonwerten entsprechende Werte zu erzeugen, wobei die Suchtabelle gespeicherte Werte enthält, die zusammen eine vorbestimmte Punktverstärkungsfunktion für die dem einen Farbauszug zugeordnete Auszugsfarbe bilden.

- 5 7. Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß die erste Suchtabelle mehrere separate Punktverstärkungs-Suchtabellen aufweist, von denen jede eine vorbestimmte Punktverstärkungsfunktion für eine andere Auszugsfarbe speichert; und daß der Schritt zum Anwenden der eingehenden Halbtonwerte folgenden Schritt umfaßt:
  - 10 - Weiterleiten jedes der eingehenden Halbtonwerte für den einen Auszug an die diesem zugeordnete Punktverstärkungs-Suchtable.
8. Verfahren nach Anspruch 7, dadurch gekennzeichnet, daß der Anwendungsschritt zusätzlich folgenden Schritt umfaßt:
  - 15 - Auslesen jeder Punktverstärkungs-Suchtable aus einem Speicher vor Modifizierung eines eingehenden Halbtonwerts, um so die erste Suchtable zu bilden.
9. Verfahren nach Anspruch 3, dadurch gekennzeichnet, daß der Schritt zum Umwandeln der modifizierten Halbtonwerte folgenden Schritt umfaßt:
  - 20 - Verändern der Intensitätsstufen eines Aufzeichnungsgeräts, das zum Drucken der dem einen Farbauszug zugeordneten Grundfarben-Rasterteilpunkte verwendet wird, gemäß einer vorbestimmten Flächendichtebeziehung, die eine Belichtungsstufe für jeden Aufzeichnungspunkt kennzeichnet, der den mehrfarbigen Rasterteilpunkt bildet, und zwar auf der Grundlage, ob der Aufzeichnungspunkt abgedunkelt werden soll oder nicht, und der diesem zugeordneten Auszugsfarbe.
- 25 10. Verfahren nach Anspruch 9, dadurch gekennzeichnet, daß der Veränderungsschritt folgenden Schritt umfaßt:
  - 30 - Anwenden jedes Bitmap-Wertes auf jeden Grundfarben-Rasterteilpunkt über eine zweite Suchtable, um den Intensitätsstufen entsprechende Stufen zu erzeugen, wobei die zweite Suchtable gespeicherte Werte für die vorbestimmte Flächendichtebeziehung für die dem einen Farbauszug zugeordnete Auszugsfarbe enthält.
- 35 11. Verfahren nach Anspruch 10, dadurch gekennzeichnet, daß die zweite Suchtable mehrere separate Flächendichte-Suchtabellen umfaßt, die eine vorbestimmte Flächendichte-Beziehung für eine andere Auszugsfarbe speichern; und daß der Schritt zur Anwendung der Bitmap-Werte folgenden Schritt umfaßt:
  - Weiterleiten der Bitmap-Werte für den einen Farbauszug an die diesem zugeordnete Flächendichte-Suchtable.
- 40 12. Anwendung des Verfahrens nach einem der vorhergehenden Ansprüche in einem direkt arbeitenden digitalen Farbprüfsystem zum Erzeugen eines Farbrastervordrucks aus eingehenden digitalisierten Prepress-Halbtondaten für ein Eingangsbild, wobei das System Mittel zum Verarbeiten der eingehenden Prepress-Halbtondaten aufweist, um gerasterte Grundfarben-Rasterauszugsdaten zu erhalten, die Rasterauszüge darstellen, welche zusammen den Probedruck erzeugen sollen, ferner eine Druckeinrichtung zum Drucken jedes der Rasterauszüge mit korrekter Ausrichtung zum Erzeugen des Probedrucks, sowie mit den Verarbeitungsmitteln und der Druckeinrichtung verbundene Steuerungsmittel.
- 45 13. Vorrichtung zum Erzeugen einer gewünschten Farbe in einem Ausgabebild aus einer Vielzahl von unterschiedlichen Farbstoffen, wobei das Ausgabebild eine Rasterabbildung eines Halbton-Eingangsbildes darstellt und die Vorrichtung folgende Komponenten umfaßt:
  - 50 - Mittel zum Erzeugen von Daten, die eine Vielzahl von Halbton-Auszügen des Eingangsbildes in den Grundfarben darstellen, wobei jeder der Auszüge eingehende Halbtonwerte aufweist und entsprechende Werte für alle Auszüge zusammen einen Bereich im Ausgabebild definieren, das die gewünschte Farbe enthalten soll;
  - 55 - Mittel zum Erzeugen von einen mehrfarbigen Rasterpunkt (100) definierenden Daten in Abhängigkeit von jedem eingehenden Halbtonwert in jedem der Auszüge, wobei die Größe und Flächendichte des mehrfarbigen Rasterpunktes vorbestimmte Funktionen des eingehenden Halbtonwerts und einer diesem zugeordneten Aus-



zugsfarbe, so daß mehrere Rasterteilpunkte (110, 120, 130, 140) in den Grundfarben gebildet werden; und

- Mittel zum Drucken räumlich entsprechender Grundfarben-Rasterteilpunkte im Ausgabebild, jeder von einem unterschiedlichen, entsprechenden Farbauszug mit einem entsprechenden Farbstoff, auf einer Punkt-für-Punkt-Basis in vorbestimmter Reihenfolge und Ausrichtung, so daß zusammengesetzte, mehrfarbige Rasterpunkte entstehen, die zusammen die gewünschte Farbe wiedergeben.

14. Vorrichtung nach Anspruch 13, dadurch gekennzeichnet, daß die Mittel zum Erzeugen folgende Komponenten aufweisen:

- Mittel (232, 234, 236, 238) zum Modifizieren des in jedem Farbauszug enthaltenen, eingehenden Halbtonwerts gemäß einer vorbestimmten Punktverstärkung, um entsprechende, modifizierte Halbtonwerte zu erzeugen, die gegenüber entsprechenden Werten der eingehenden Halbtonwerte eine vorgegebene Variation in der Punktverstärkung aufweisen; und

- Mittel zum Umwandeln jedes modifizierten Halbtonwerts für jeden Farbauszug in einen Rasterpunkt mit einem vorbestimmten Flächendichtewert, um die Grundfarben-Rasterteilpunkte für den einen Farbauszug zu erzeugen, wobei der Flächendichtewert eine vorbestimmte Funktion einer diesem zugeordneten Auszugsfarbe darstellt.

15. Vorrichtung nach Anspruch 14, dadurch gekennzeichnet, daß die Druckmittel einen räumlich entsprechenden Grundfarben-Rasterteilpunkt aus jedem der Auszüge auf konzentrischer Grundlage überlagern, um einen den zusammengesetzten, mehrfarbigen Rasterpunkten entsprechenden Punkt zu erzeugen.

16. Vorrichtung nach Anspruch 15, dadurch gekennzeichnet, daß jeder der Farbstoffe eine unterschiedliche Grundfarbe ist.

17. Vorrichtung nach Anspruch 16, dadurch gekennzeichnet, daß die unterschiedlichen Farbstoffe die Farben Blau, Rot, Gelb und Schwarz darstellen.

18. Vorrichtung nach Anspruch 15, dadurch gekennzeichnet, daß die Mittel zum Modifizieren der eingehenden Halbtonwerte folgende Komponenten umfassen:

- eine erste Suchtabelle (232, 234, 236, 238), die gespeicherte Werte enthält, welche zusammen eine vorbestimmte Punktverstärkungsfunktion für die dem einen Farbauszug zugeordnete Auszugsfarbe bilden; und

- Mittel zum Anwenden jedes der eingehenden Halbtonwerte auf den einen Farbauszug über die erste Suchtabelle, um den modifizierten Halbtonwerten entsprechende Werte zu erzeugen.

19. Vorrichtung nach Anspruch 18, dadurch gekennzeichnet, daß die erste Suchtabelle mehrere separate Punktverstärkungs-Suchtabellen aufweist, von denen jede eine vorbestimmte Punktverstärkungsfunktion für eine andere Auszugsfarbe speichert; und daß die Mittel zum Anwenden der eingehenden Halbtonwerte folgende Komponente aufweisen:

- Mittel zum Weiterleiten jedes der eingehenden Halbtonwerte für den einen Auszug an die diesem zugeordnete Punktverstärkungs-Suchtable.

20. Vorrichtung nach Anspruch 15, dadurch gekennzeichnet, daß die Mittel zum Umwandeln der modifizierten Halbtonwerte folgende Komponente aufweisen:

- Mittel (240) zum Verändern der Intensitätsstufen eines Aufzeichnungsgeräts, das zum Drucken der dem einen Farbauszug zugeordneten Grundfarben-Rasterteilpunkte verwendet wird, gemäß einer vorbestimmten Flächendichtebeziehung, die eine Belichtungsstufe für jeden Aufzeichnungspunkt kennzeichnet, der den mehrfarbigen Rasterteilpunkt bildet, und zwar auf der Grundlage, ob der Aufzeichnungspunkt abgedunkelt werden soll oder nicht, und der diesem zugeordneten Auszugsfarbe.

21. Vorrichtung nach Anspruch 20, dadurch gekennzeichnet, daß die Veränderungsmittel folgende Komponenten umfassen:

- eine zweite Suchtabelle (242, 244, 246, 248), die gespeicherte Werte für die vorbestimmte Flächendichtebeziehung für die dem einen Farbauszug zugeordnete Auszugsfarbe enthält; und Mittel zum Anwenden jedes Bitmap-Wertes auf jeden Grundfarben-Rasterteilpunkt über eine zweite Suchtabelle, um den Intensitätsstufen entsprechende Stufen zu erzeugen.

22. Vorrichtung nach Anspruch 21, dadurch gekennzeichnet, daß die zweite Suchtabelle mehrere separate Flächendichte-Suchtabelle umfaßt, die eine vorbestimmte Flächendichte-Beziehung für eine andere Auszugsfarbe speichern; und daß die Mittel zur Anwendung der Bitmap-Werte Mittel zum Weiterleiten der Bitmap-Werte für den einen Farbauszug an die diesem zugeordnete Flächendichte-Suchtabelle aufweisen.

23. Direkt arbeitendes digitales Farbprüfsystem zum Erzeugen eines Farbrastervordrucks aus eingehenden digitalisierten Prepress-Halbtondaten für ein Eingangsbild, wobei das System Mittel zum Verarbeiten der eingehenden Prepress-Halbtondaten aufweist, um gerasterte Grundfarben-Rasterauszugsdaten zu erhalten, die Rasterauszüge darstellen, welche zusammen den Probedruck erzeugen sollen, ferner eine Druckeinrichtung zum Drucken jedes der Rasterauszüge mit korrekter Ausrichtung zum Erzeugen des Probedrucks, sowie mit den Verarbeitungsmitteln und der Druckeinrichtung verbundene Steuerungsmittel, wobei das System eine Vorrichtung nach einem der Ansprüche 13 bis 22 aufweist.

24. System nach Anspruch 23, wenn auf Anspruch 15 rückbezogen, dadurch gekennzeichnet, daß die Druckeinrichtung ein Laserprinter mit Farbstoffsublimationsübertragung ist und die Farbstoffe blau-, rot-, gelb- und schwarzgefärbte Geberfolien sind.

25. System nach Anspruch 23, wenn auf Anspruch 19 rückbezogen, dadurch gekennzeichnet, daß die Druckeinrichtung ein Laserprinter mit Farbstoffsublimationsübertragung ist und die Farbstoffe blau-, rot-, gelb- und schwarzgefärbte Geberfolien sind.

26. System nach Anspruch 23, wenn auf Anspruch 22 rückbezogen, dadurch gekennzeichnet, daß die Druckeinrichtung ein Laserprinter mit Farbstoffsublimationsübertragung ist und die Farbstoffe blau-, rot-, gelb- und schwarzgefärbte Geberfolien sind.

## Revendications

1. Procédé de génération d'une couleur désirée dans une image en sortie à partir d'une pluralité de colorants différents, ladite image en sortie étant une représentation tramée d'une image d'entrée à dégradés de ton en continu, le procédé comprenant les étapes consistant à :

obtenir des données représentant une pluralité de séparations de dégradés de ton en continu à couleurs primaires de ladite image en entrée, chacune desdites séparations ayant des valeurs de dégradés de ton en continu entrantes dans lequel les valeurs correspondantes parmi lesdites valeurs de dégradés de ton en continu entrantes pour la totalité desdites séparations définissent collectivement une région dans l'image en sortie qui doit contenir la couleur désirée ;

générer, en réponse à chacune des valeurs de dégradés de ton en continu entrantes dans chacune desdites séparations, des données définissant un point multiple tramé (100) dans lequel la dimension et la densité par surface uniforme du point multiple sont des fonctions prédéfinies d'une valeur de dégradés de ton en continu entrante et d'une couleur de séparation associée à celui-ci de façon à former une pluralité de points tramés constitutifs à couleurs primaires (110, 120, 130, 140) ;

imprimer dans ladite image en sortie, des points spatialement correspondants desdits points tramés constitutifs à couleurs primaires, chacun à partir d'une séparation différente correspondante desdites séparations et avec ledit colorant correspondant desdits colorants sur une base point sur point dans un ordre prédéfini et avec un alignement prédéfini entre ceux-ci de façon à former des points multiples tramés composites qui représentent collectivement ladite couleur désirée.

2. Procédé selon la revendication 1, dans lequel ladite étape de génération comprend les étapes consistant à :

modifier les valeurs de dégradés de ton en continu entrantes contenues dans chacune des séparations en conformité avec une relation d'élargissement de point prédéfinie (232, 234, 236, 238) afin de produire des valeurs de dégradés de ton en continu modifiées correspondantes, dans lequel lesdites valeurs de dégradés

de ton en continu modifiées contiennent une variation prédéterminée de la fonction d'élargissement du point par rapport aux valeurs correspondantes desdites valeurs de dégradés de ton en continu entrantes ; et convertir chacune desdites valeurs de dégradés de ton en continu modifiées pour chacune desdites séparations en un point coloré primaire présentant une valeur de densité par surface uniforme prédéfinie de façon à former lesdits points tramés constitutifs à couleurs primaires pour ladite séparation, dans lequel ladite valeur de densité par surface uniforme est une fonction prédéfinie d'une séparation de couleur associée à celle-ci.

3. Procédé selon la revendication 2, dans lequel l'étape d'impression comprend l'étape consistant à superposer un point spatialement correspondant desdits points tramés constitutifs à couleurs primaires à partir de chacune desdites séparations sur une base concentrique afin de former un point correspondant des points multiples tramés composites.

4. Procédé selon la revendication 3, dans lequel chacun desdits colorants est une couleur primaire différente.

5. Procédé selon la revendication 4, dans lequel lesdits colorants sont des colorants cyan, magenta, jaune et noir.

6. Procédé selon la revendication 3, dans lequel ladite étape de modification des valeurs de dégradés de ton en continu entrantes comprend l'étape consistant à appliquer chacune desdites valeurs de dégradés de ton en continu entrantes pour ladite séparation par l'intermédiaire d'une première table de consultation afin de produire des valeurs correspondantes desdites valeurs de dégradés de ton en continu modifiées, ladite table de consultation contenant des valeurs mémorisées qui définissent collectivement une fonction d'élargissement de point prédéfinie pour la séparation de couleur associée à ladite séparation.

7. Procédé selon la revendication 6, dans lequel ladite première table de consultation comprend une pluralité de tables de consultation d'élargissement de point séparées, dans lequel chaque table de la pluralité de tables de consultation d'élargissement de point mémorise une fonction d'élargissement de point prédéfinie pour une séparation de couleur différente ; et dans lequel ladite étape d'application des valeurs de dégradés de ton en continu entrantes comprend l'étape consistant à acheminer chaque valeur desdites valeurs de dégradés de ton en continu entrantes pour ladite séparation par l'intermédiaire de la table de consultation d'élargissement de point associée à celle-ci.

8. Procédé selon la revendication 7, dans lequel ladite étape d'application comprend de plus l'étape consistant à lire, avant de modifier l'une quelconque desdites valeurs de dégradés de ton en continu entrantes, chacune desdites tables de consultation d'élargissement de point à partir d'une mémoire de façon à former ladite première table de consultation.

9. Procédé selon la revendication 3, dans lequel ladite étape de conversion de valeurs de dégradés de ton en continu modifiées comprend l'étape consistant à faire varier les niveaux d'intensité d'un dispositif d'écriture utilisé pour imprimer chaque point desdits points tramés constitutifs à couleurs primaires associés à ladite séparation en conformité avec une relation de densité par surface uniforme prédéfinie, dans lequel la relation de densité par surface uniforme prédéfinie caractérise un niveau d'exposition pour chaque point d'écriture qui doit former ledit point multiple tramé composé sur la base du fait que ledit point d'écriture doit être foncé ou non et de la séparation de couleur associée à celui-ci.

10. Procédé selon la revendication 9, dans lequel ladite étape de variation comprend l'étape consistant à appliquer chaque valeur en mode point pour chaque point desdits points tramés constitutifs à couleurs primaires par l'intermédiaire d'une seconde table de consultation afin de produire des niveaux d'intensité correspondants parmi les niveaux d'intensité, ladite seconde table de consultation contenant des valeurs mémorisées pour la relation de densité par surface uniforme prédéfinie pour la séparation de couleur associée à ladite séparation.

11. Procédé selon la revendication 10, dans lequel ladite seconde table de consultation comprend une pluralité de tables de consultation de densité par surface uniforme séparée dans laquelle chaque table de la pluralité des tables de consultation de densité par surface uniforme mémorise une relation de densité par surface uniforme prédéfinie pour une séparation de couleur différente ; et dans lequel l'étape d'application des valeurs en mode point comprend l'étape consistant à acheminer chaque valeur desdites valeurs en mode point pour ladite séparation par l'intermédiaire de la table de consultation de densité par surface uniforme associée à celle-ci.

12. Utilisation du procédé selon l'une quelconque des revendications précédentes dans un système d'épreuve de

formation de certification couleur numérique directe pour générer une épreuve de certification tramée couleur à partir de données à dégradés de ton en continu prêtirées numérisées entrantes pour une image en entrée, ledit système comportant un moyen pour traiter les données à dégradé de ton en continu prêtirées entrantes afin de produire des données de séparation tramées colorées primaires représentant des séparations tramées qui doivent collectivement former l'épreuve de certification, une machine de marquage pour écrire chacune desdites séparations tramées avec un alignement correct de façon à former ladite épreuve de certification et un moyen de commande connecté audit moyen de traitement et à ladite machine de marquage.

13. Appareil pour générer une couleur désirée dans une image en sortie à partir d'une pluralité de colorants différents, ladite image en sortie étant une représentation tramée d'une image d'entrée à dégradés de ton en continu, l'appareil comprenant :

un moyen pour obtenir des données représentant une pluralité de séparations de dégradés de ton en continu à couleurs primaires de ladite image en entrée, chacune desdites séparations ayant des valeurs de dégradés de ton en continu entrantes dans lesquelles les valeurs correspondantes desdites valeurs de dégradés de ton en continu entrantes pour la totalité desdites séparations définissent collectivement une région dans l'image en sortie qui doit contenir la couleur désirée ;

un moyen pour générer, en réponse à chaque valeur des valeurs de dégradés de ton en continu entrantes dans chacune desdites séparations, un point multiple tramé (100) définissant les données dans lequel la dimension et la densité par surface uniforme des multiples points sont des fonctions prédéfinies de la valeur de dégradés de ton en continu entrante et d'une couleur de séparation associée à celle-ci de façon à former une pluralité de points tramés constitutifs à couleurs primaires (110, 120, 130, 140) ;

un moyen pour imprimer, dans ladite image en sortie, des points spatialement correspondants desdits points tramés constitutifs à couleurs primaires, chacun à partir d'une séparation différente correspondante desdites séparations et avec un colorant correspondant desdits colorants sur une base point sur point dans un ordre prédéfini et avec un alignement prédéfini entre ceux-ci de façon à former un point multiple tramé composite qui représente collectivement ladite couleur désirée.

14. Appareil selon la revendication 13, dans lequel ledit moyen de génération comprend :

un moyen (232, 234, 236, 238) pour modifier les valeurs de dégradés de ton en continu entrantes contenues dans chacune des séparations en conformité avec une relation d'élargissement de point prédéfinie afin de produire des valeurs de dégradés de ton en continu modifiées correspondantes, dans lequel lesdites valeurs de dégradés de ton en continu modifiées contiennent une variation prédéterminée de l'élargissement de point par rapport aux valeurs correspondantes desdites valeurs de dégradés de ton en continu entrantes ; et

un moyen pour convertir chaque valeur desdites valeurs de dégradés de ton en continu modifiées pour chaque séparation desdites séparations en un point coloré primaire tramé présentant une valeur de densité par surface uniforme prédéfinie de façon à former lesdits points tramés constitutifs à couleurs primaires pour ladite séparation, dans lequel ladite valeur de densité par surface uniforme est une fonction prédéfinie d'une couleur de séparation associée à celle-ci.

15. Appareil selon la revendication 14, dans lequel ledit moyen d'impression superpose un point spatialement correspondant desdits points tramés constitutifs à couleurs primaires de chacune desdites séparations sur une base concentrique afin de former un point correspondant des points multiples tramés composites.

16. Appareil selon la revendication 15, dans lequel chacun desdits colorants est une couleur primaire différente.

17. Appareil selon la revendication 16, dans lequel lesdits colorants différents sont des colorants cyan, magenta, jaune et noir.

18. Appareil selon la revendication 15, dans lequel ledit moyen de modification de valeurs de dégradés de ton en continu entrantes comprend :

une première table de consultation (232, 234, 236, 238) contenant des valeurs mémorisées qui définissent collectivement une fonction d'élargissement du point prédéfinie pour la couleur de séparation associée à ladite première séparation ; et

un moyen pour appliquer chaque valeur desdites valeurs de dégradés de ton en continu entrantes pour lesdites séparations par l'intermédiaire de la première table de consultation afin de produire des valeurs correspon-

dantes desdites valeurs de dégradés de ton en continu modifiées.

- 5 19. Appareil selon la revendication 18, dans lequel ladite première table de consultation comprend une pluralité de tables de consultation d'élargissement de point séparées, dans lequel chaque table de la pluralité des tables de consultation d'élargissement de point mémorise une fonction d'élargissement de point prédéfinie pour une couleur de séparation différente ; et dans lequel ledit moyen d'application de valeurs de dégradés de ton en continu entrantes comprend un moyen pour acheminer chaque valeur des valeurs de dégradés de ton en continu entrantes pour ladite séparation par l'intermédiaire de la table de consultation d'élargissement de point associée à celle-ci.
- 10 20. Appareil selon la revendication 15, dans lequel ledit moyen de conversion de valeurs de dégradés de ton en continu modifiées comprend un moyen (240) pour faire varier le niveau d'intensité d'un dispositif d'écriture utilisé pour imprimer chaque point desdits points tramés constitutifs à couleur primaire associés à ladite séparation en conformité avec une relation de densité par surface uniforme prédéfinie, dans lequel la relation de densité par surface uniforme prédéfinie caractérise un niveau d'exposition pour chaque point d'écriture qui doit former ledit point multiple tramé composite sur la base du fait que chaque dit point d'écriture doit être foncé ou non et sur la base de la couleur de séparation associée à celui-ci.
- 15 21. Appareil selon la revendication 20, dans lequel ledit moyen de variation comprend :  
une seconde table de consultation (242, 244, 246, 248) contenant des valeurs mémorisées pour la relation de densité par surface uniforme prédéfinie pour la couleur de séparation associée à ladite séparation ; et un moyen pour appliquer chaque valeur en mode point pour chaque point desdits points tramés constitutifs à couleurs primaires par l'intermédiaire de la seconde table de consultation afin de produire les niveaux correspondants des niveaux d'intensité.
- 25 22. Appareil selon la revendication 21, dans lequel ladite seconde table de consultation comprend une pluralité de tables de consultation de densité par surface uniforme séparée, dans lequel chaque table de la pluralité de tables de consultation de densité par surface uniforme mémorise une relation de densité par surface uniforme prédéfinie pour une couleur de séparation différente ; et dans lequel le moyen d'application de valeurs en mode point comprend un moyen pour acheminer chaque valeur des valeurs en mode point pour ladite séparation par l'intermédiaire de la table de consultation de densité par surface uniforme associée à celle-ci.
- 30 23. Système de formation d'épreuve de certification couleur numérique directe pour générer une épreuve de certification tramée couleur à partir de données à dégradé de ton en continu prétréées numérisées entrantes pour une image d'entrée, ledit système comportant un moyen pour traiter les données à dégradés de ton en continu prétréées entrantes afin de produire des données de séparation tramées de couleurs primaires représentant des séparations tramées qui doivent collectivement former l'épreuve de certification, une machine de marquage pour écrire chaque séparation desdites séparations tramées avec un alignement correct de façon à former ladite épreuve de certification, et un moyen de commande connecté audit moyen de traitement et à ladite machine de marquage, dans lequel ledit système comprend un appareil comme défini selon l'une quelconque des revendications 13 à 22.
- 35 40 24. Système selon la revendication 23 lorsque dépendante de la revendication 15, dans lequel la machine de marquage est une imprimante laser à transfert de colorant par sublimation et lesdits colorants comprennent des feuilles donneuses colorées cyan, magenta, jaune et noir.
- 45 25. Système selon la revendication 23 lorsque dépendante de la revendication 19, dans lequel la machine de marquage est une imprimante laser à transfert de colorant par sublimation et lesdits colorants comprennent des feuilles donneuses colorées cyan, magenta, jaune et noir.
- 50 26. Système selon la revendication 23 lorsque dépendante de la revendication 22, dans lequel la machine de marquage est une imprimante laser à transfert de colorant par sublimation et lesdits colorants comprennent des feuilles donneuses colorées cyan, magenta, jaune et noir.

55

FIG. 1



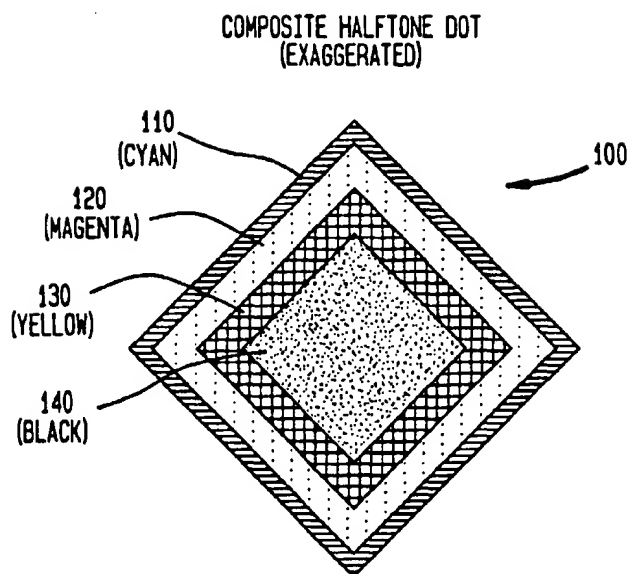


FIG. 2

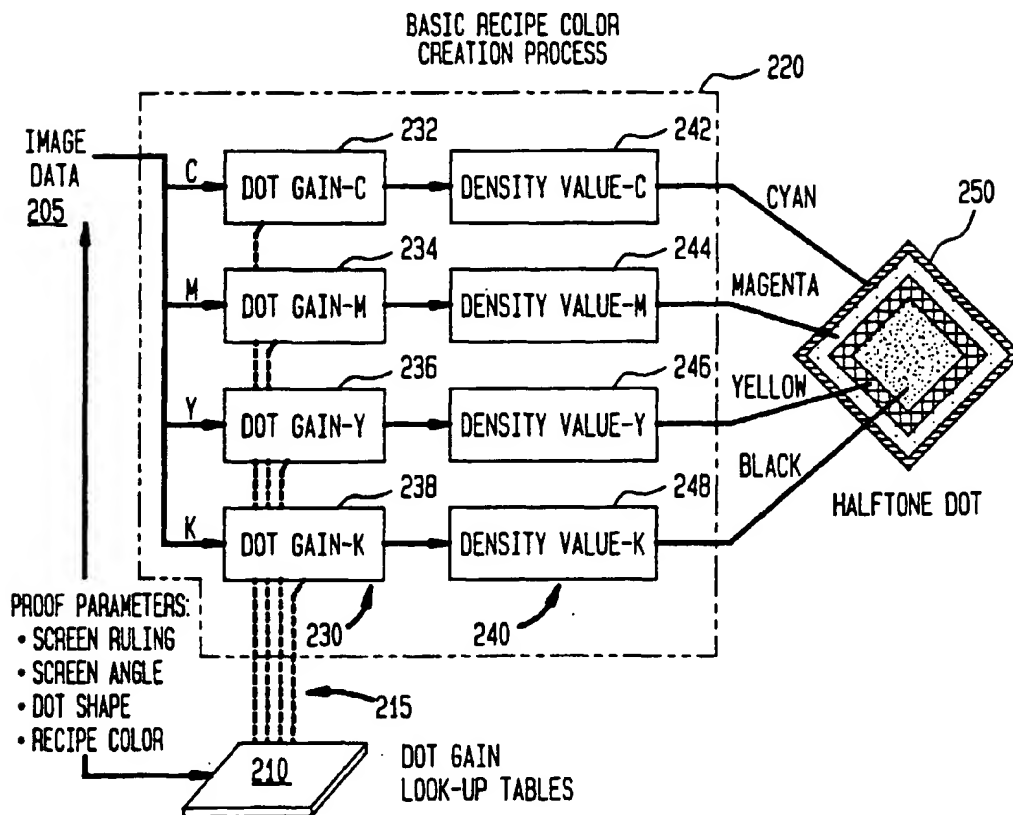


DOT GAIN CURVES

**FIG. 3**  
(PRIOR ART)

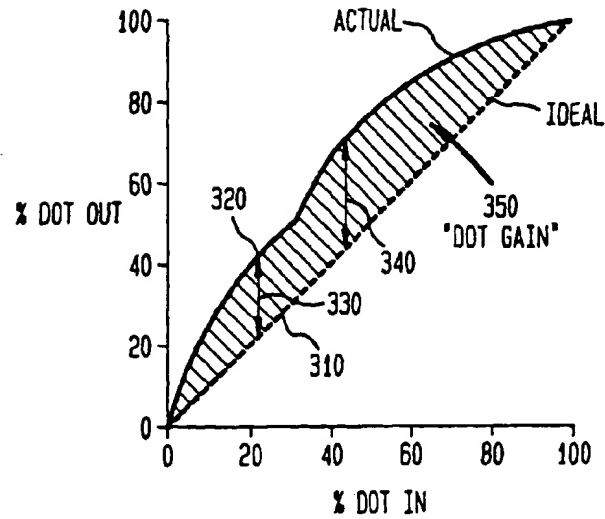


**FIG. 4**

DOT GAIN  
FUNCTIONS FOR  
AN ILLUSTRATIVE  
RECIPE COLOR

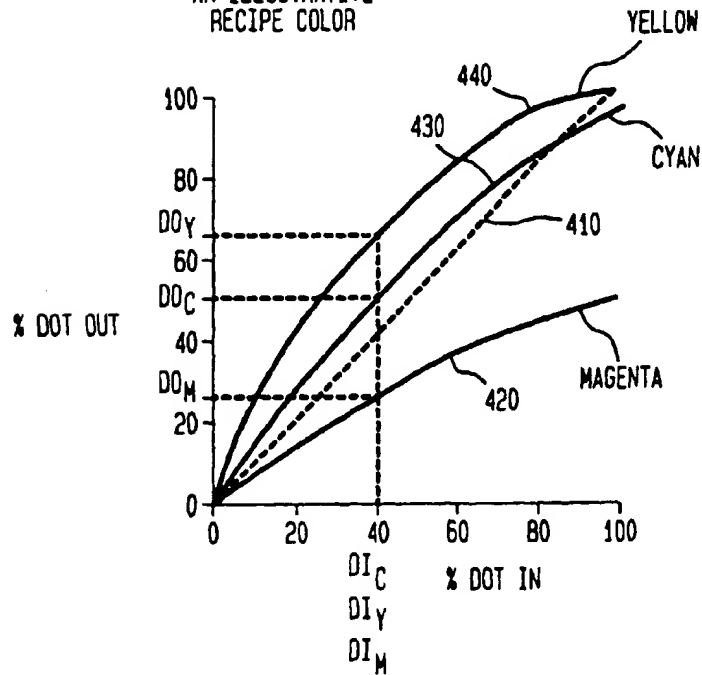

**FIG. 5A**

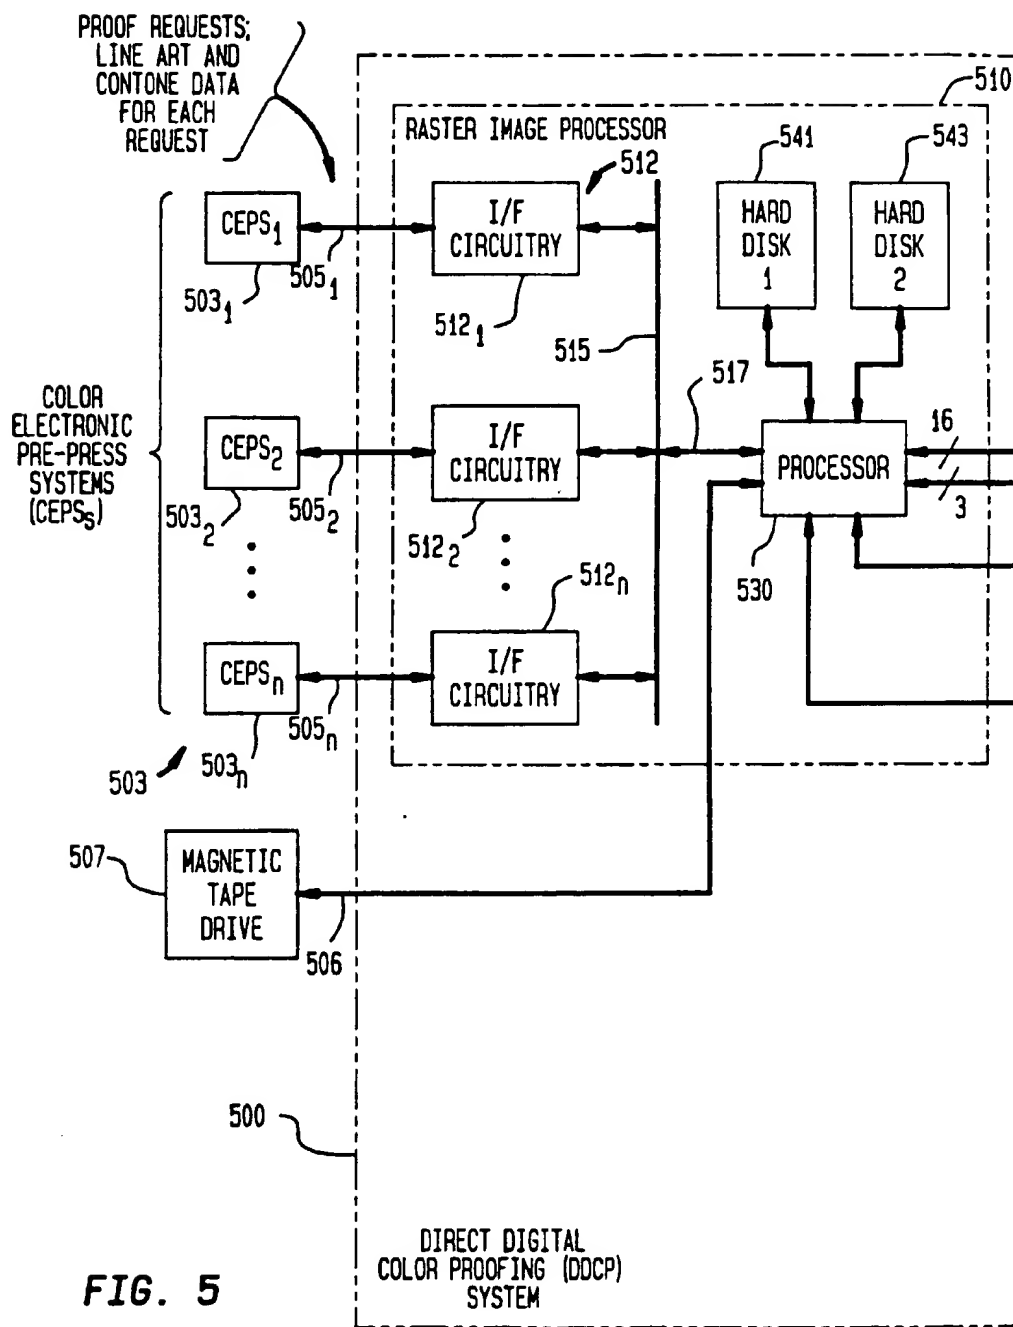


**FIG. 5**

FIG. 5A	FIG. 5B
------------	------------



FIG. 5B

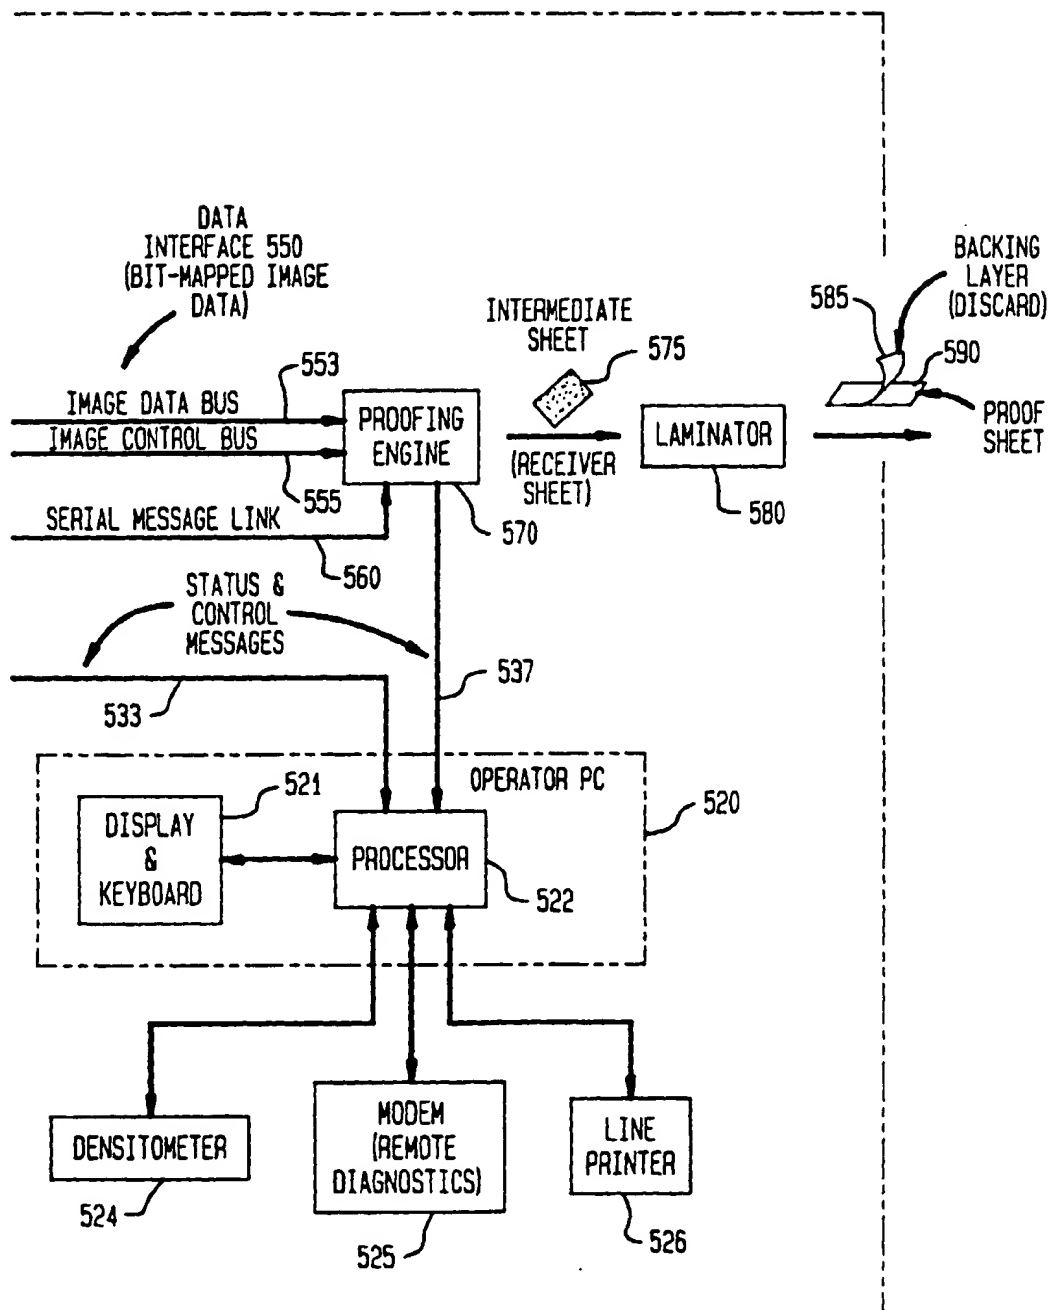

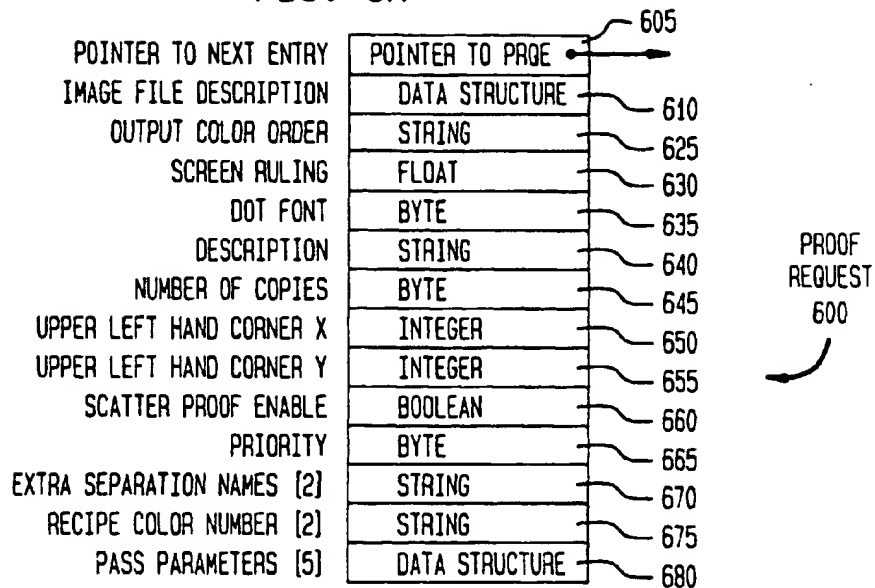
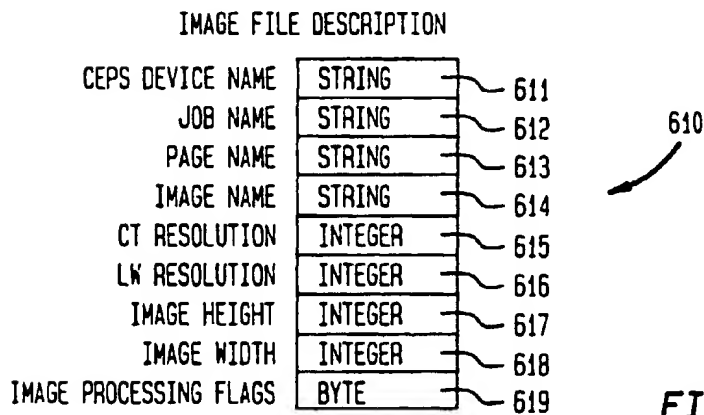
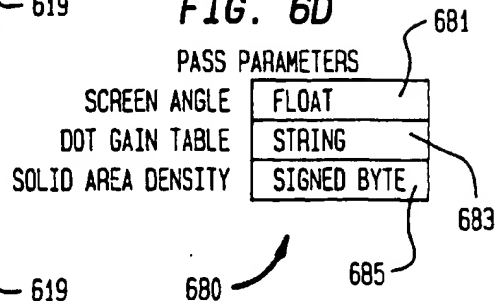
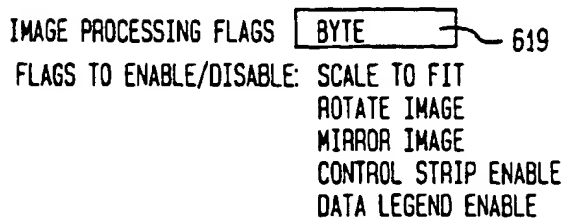
**FIG. 6A****FIG. 6B****FIG. 6D****FIG. 6C**

FIG. 7

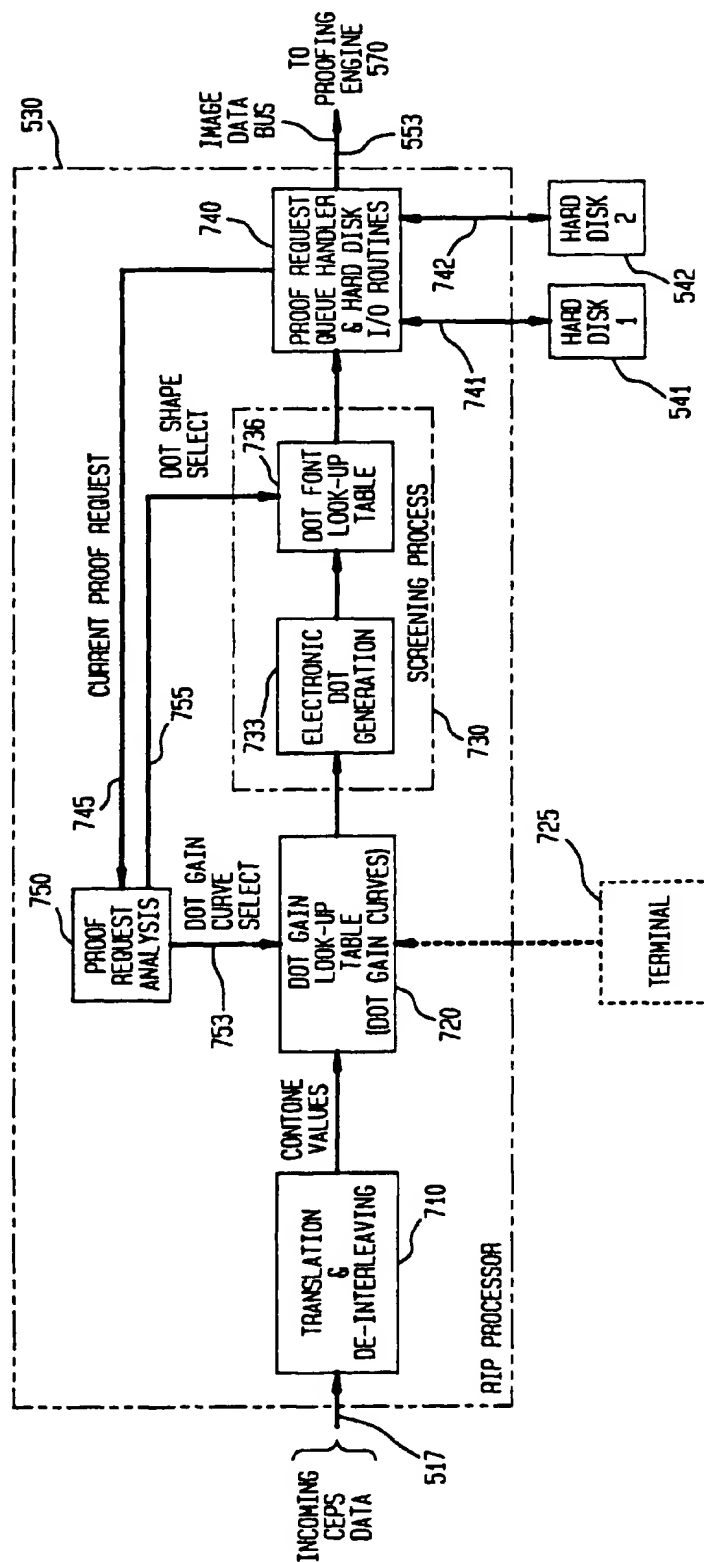


FIG. 8


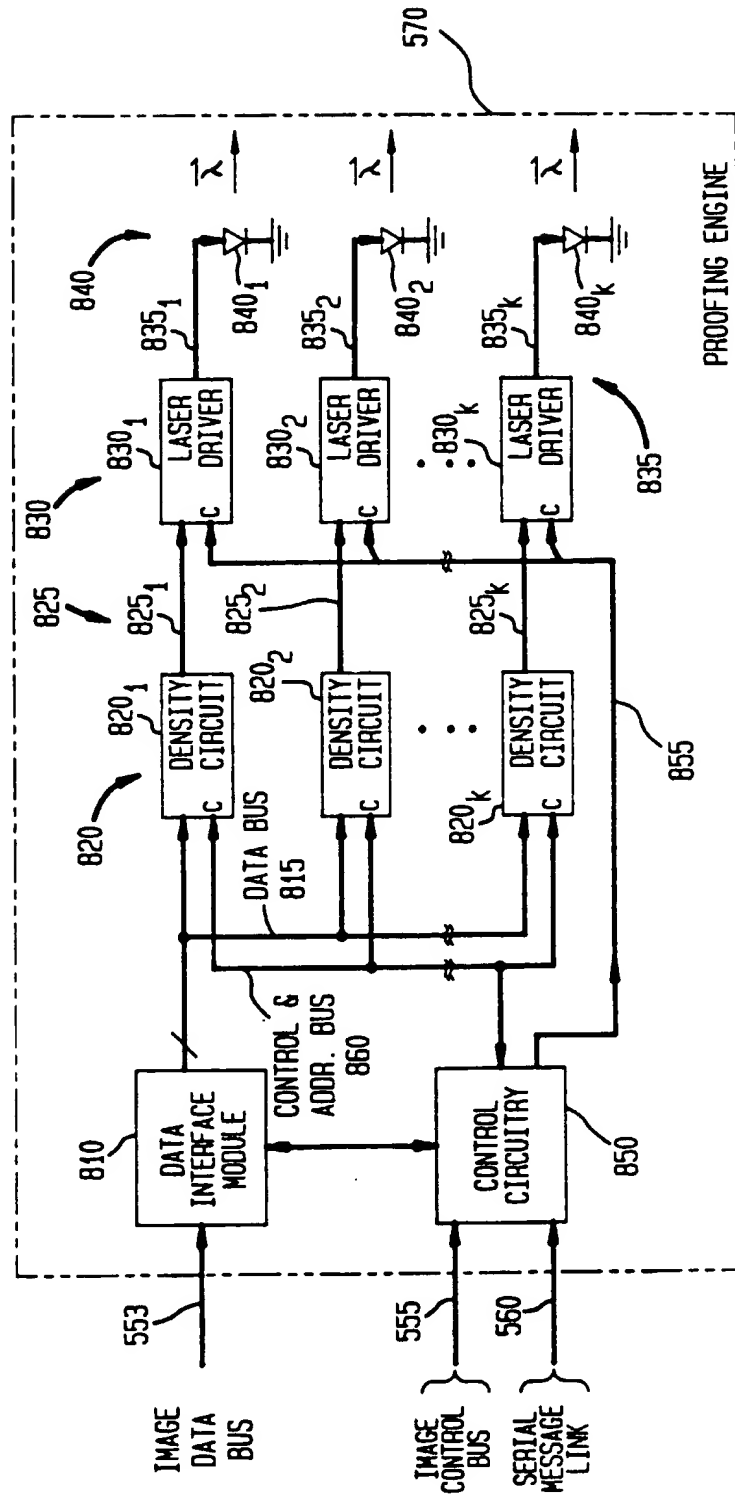


FIG. 9

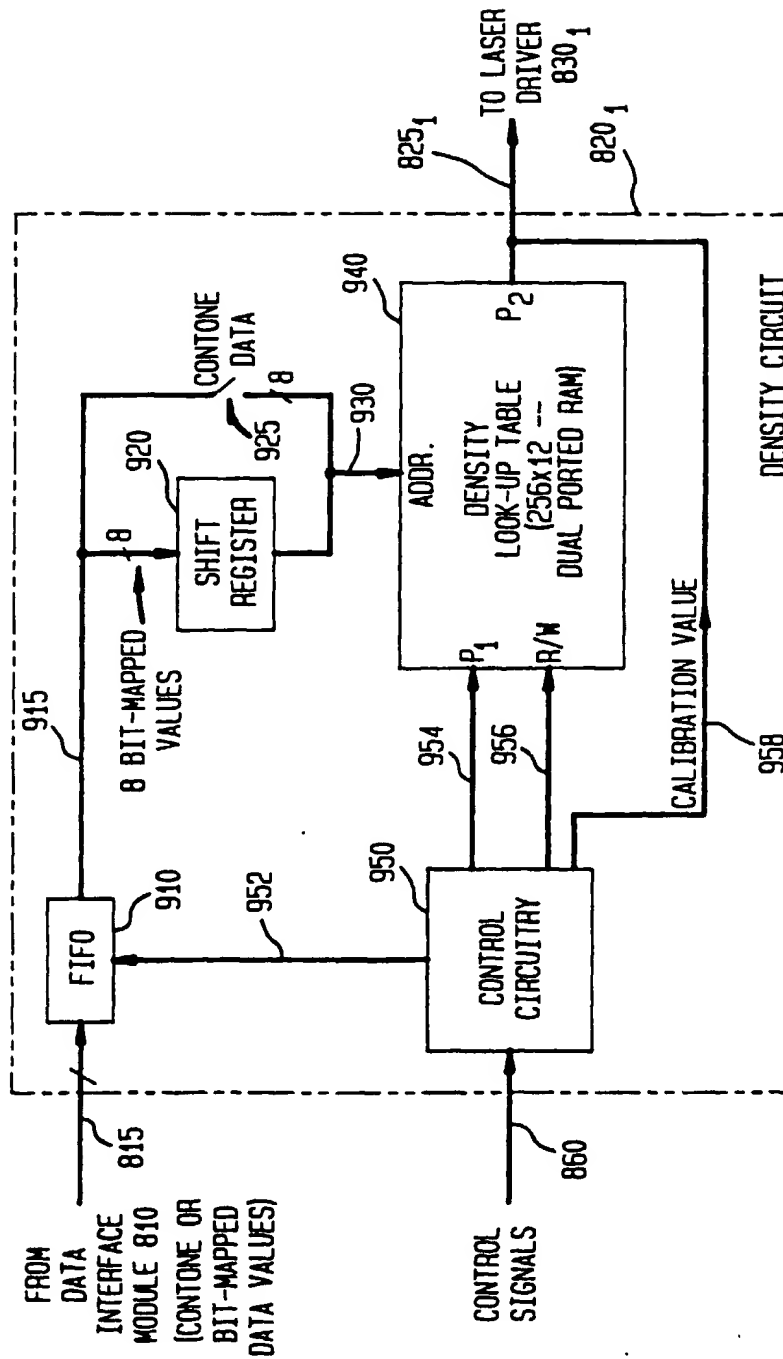

**FIG. 10**  
RECIPE  
COLORS  
SELECTION  
SCREEN  
DISPLAY

1000

Recipe Special Colors Selection

Create/Modify Recipe Special Color

Pnk45  
Khak1  
COLOR312  
COLOR122  
COLOR413  
COLOR163  
EK Yellow

Enter Recipe Name:

function keys:

Exit

Enter

Delete

Re-name

Copy

Prev

Next

**FIG. 11**  
RECIPE  
COLORS  
SETUP  
SCREEN  
DISPLAY

1100

Recipe Special Colors Setup

Recipe Special Color Name: Pnk45

Recommended Screen Ruling: 4.8

Colors (in lay-down order)	Density	Dot Gain Table
Cyan	+3	Number 9
Yellow	-1	Number 6
Magenta	0	MagDot6
Black	+12	Std8P

function keys:

Save

Select

Move

Edit

Quit

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**